



#### **POWER X-CHANGE**

Power X-Change   Cordless Excellence.	4
Power X-Change Robot Lawn Mowers without perimeter wire	6
Power X-Change Robot Lawn Mowers	8
Cordless Lawn Mowers	10
Petrol Lawn Mower (Power X-Change Electric Start)	17
Cordless Cylinder Lawn Mower	17
Cordless Multipurpose Spreader	18
Cordless Universal Spreader	18
Cordless Scarifiers/Aerators	18
Cordless Tillers	21
Cordless Snow Thrower	21
Cordless Scythes	22
Cordless Lawn Trimmers	23
Cordless Lawn Edge Trimmer	26
Cordless Grout Cleaners	27
Cordless Surface Brushes	27
Cordless Hedge Trimmers	29
Cordless Olive and Fruit Harvester	31
Cordless Multifunctional Tools	32
Cordless Pole-Mounted Pruners	33
Cordless Telescopic Hedge Trimmers	34

Cordless Chainsaws	35
Cordless Pruning Chainsaw	36
Cordless Chain Sharpener	36
Cordless Pruning Saw	37
Cordless Pruning Shears	37
Cordless Universal Blower	38
Cordless Leaf Blowers	38
Cordless Leaf Vacuums	38
Cordless Knife Shredder	39
Cordless Grass and Shrub Shears	40
Cordless Pressure Sprayers	41
Cordless Air Pump	42
Cordless Outdoor Light	42
Cordless Fans	43
Battery Belt	44
Gas Hot Air Generator with Rechargeable Battery	44
Cordless Hose Reels (Water)	45
Cordless Automatic Garden Pumps	46
Cordless Garden Pumps	47
Cordless Submersible Pressure/Rainwater Barrel Pump	50
Cordless Clear Water Pumps	50
Cordless Dirty Water Pumps	51



### **POWER X-CHANGE ACCESSORIES**

System Cases E-Case	52
Accessories – Cases // Bags	55

Power X-Change Accessories – Batteries // Starter Kits // Chargers	56
Battery Charging Time Table	60



#### **GARDEN CARE**

Hand Lawn Mowers	62
Electric Lawn Mowers	64
Petrol Lawn Mowers	65
Electric Scarifiers/Aerators	67
Electric Scarifier	68
Petrol Scarifier	68
Garden Roller	68
Multi-Purpose Spreader	69
Electric Lawn Trimmers	69
Petrol Lawn Trimmer	70
Petrol Multifunctional Tool	70
Petrol Scythes	71
Petrol Tillers	73

Electric Tillers	73
Electric Hedge Trimmers	74
Petrol Hedge Trimmer	76
Cordless Grass and Shrub Shears	76
Electric Pole-Mounted Pruner	77
Electric Telescopic Hedge Trimmers	77
Electric Multifunctional Tool	78
Electric Chainsaws	78
Petrol Chainsaws	80
Electric Chain Sharpeners	81
Electric Leaf Vacuums	82
Garden Shredders	82
Electric Roller Shredders	83



#### **WATER TECHNOLOGY**

AQUA SENSOR Clear Water Pump	84
AQUA SENSOR Dirty Water Pumps	84
Multi-Purpose Pumps	85
Submersible Pump Dirty/Clear Water ECO	86
Dirty Water Pumps	86
Clear Water Pumps	89
Rain Barrel Pump	90
Submersible Pressure Pumps	90
Deep Well Pumps	91

Garden Pumps PLUS	92
Garden Pumps	94
Peripheral Pump	95
Automatic Home and Garden Pumps PLUS	95
Automatic Home and Garden Pump SMART	96
Automatic Home and Garden Pump	96
Water Works PLUS	97
Water Works	98
Petrol Water Pumps	99





#### **PROFESSIONAL**

PROFESSIONAL Cordless Robot Lawn Mower	102
PROFESSIONAL Cordless Lawn Mowers	104
PROFESSIONAL Cordless Tiller	111
PROFESSIONAL Cordless Snow Thrower	112
PROFESSIONAL Cordless Earth Auger	113
PROFESSIONAL Cordless Scythes	114
PROFESSIONAL Cordless Lawn Trimmer	116
PROFESSIONAL Cordless Hedge Trimmers	117
PROFESSIONAL Cordless Multifunctional Tool	119

PROFESSIONAL Cordless Pole-Mounted Pruner	120
PROFESSIONAL Cordless Telescopic Hedge Trimmer	121
PROFESSIONAL Cordless Chainsaws	122
PROFESSIONAL Top-handeled Cordless Chainsaw	124
PROFESSIONAL Cordless Pruning Chainsaw	125
PROFESSIONAL Cordless Leaf Blowers	126
PROFESSIONAL Cordless Leaf Vacuum	129
PROFESSIONAL Cordless Pruning Shears	130

Power X-Change Accessories – Batteries // Starter Kits // Chargers	132
Battery Charging Time Table	136

#### **Einhell-Service**

Eschenstr. 6 94405 Landau / Isar Germany

 Telefon
 + 49 (0) 9951 959 2000

 Fax
 + 49 (0) 9951 959 1700

 Web
 www.einhell-service.de

 Email
 Service-DE@einhell.com

#### **Einhell Germany AG**

Wiesenweg 22 94405 Landau / Isar Germany

Web info@einhell.de Email www.einhell.de

#### THIS IS HOW:

Find out more at einhell.de, register in your customer account and apply for the warranty. Further information is available at www.einhell.de/en/services/ warranties/

#### THE EINHELL GUARANTEE PROMISE.

We develop our products so that you can make everything possible. Our priority here is functionality, safety and quality. That is our promise and this is backed up by our guarantees too.



#### **30 DAY MONEY BACK GUARANTEE**

For 100% satisfaction with your Power X-Change device. This guarantee is only valid for purchases in stationary shops! Online purchases are excluded.



#### 3-YEAR EINHELL PRODUCT WARRANTY

Warranty extension for your Power X-Change device to 3 years.



#### POWER X-CHANGE BATTERY WARRANTY

Warranty extension for Power X-Change batteries to 3 years.



#### **EINHELL BRUSHLESS WARRANTY**

Warranty extension for all PurePOWER Brushless products to 10 years.\*

<sup>\*</sup> This warranty covers only defects in the engine that are due to a material or manufacturing defect





# 30Ct100LS





# CORDLESS FREEDOM. FOR DIY ENTHUSIASTS AND HOBBY GARDENERS.

#### At last - no more too short or severed cables.

When you have no longer to worry about extension cables that are too short or sufficient sockets. When the device comes to the project instead of the other way round. When you simply insert the battery and are ready to go, whether it is a lawn mower, garden pump, rotary hammer or wet and dry vacuum cleaner. Than that is the feeling of cordless freedom.

# 1 BATTERY FITS ALL TOOLS. THE BATTERY SYSTEM FOR THE WORKSHOP, GARDEN AND YOUR ENTIRE HOME.

#### Just as versatile as you: Battery power for every situation.

With more than 300 battery operated DIY and garden tools, our battery platform Power X-Change is already the broadest for the ambitious DIYer and amateur gardener. And it's not stopping there! By the year 2027 the battery platform will feature more than 450 tools. What's so special about it is that all products from the Power X-Change platform can be operated with just one battery type (18 V).

# **POWERFUL MACHINES.**LONG-LASTING BATTERIES.

#### Battery power for all your projects.

Less power? No way! Our cordless machines offer up to 2700 W of battery power and 8 Ah of capacity, making them easily a match for corded machines! Whether you just want to hang a shelf or drill through a solid concrete wall, with Power X-Change you are equipped to meet any challenge with power and endurance.

# LATEST TECHNOLOGY. PROVEN QUALITY

#### For the highest level of safety and performance.

Power X-Change batteries are the core component of our platform. That's why we use only the best components such as high-performance new-generation cells and our intelligent processor-controlled battery electronics. This makes our PXC battery one of the safest in the industry and ensures efficiency, reliability and durability.

## **EINHELL PROFESSIONAL.**MORE POWER FOR PROS.

#### True Pros always give MORE.

Because every step demands perfection. Where precision is a must. And every second counts. Professionals also expect more from their tools. Now Einhell gives them more: More performance. More endurance. More warranty. More lifetime. More functionality.







## **ACTIVE BATTERY MANAGEMENT SYSTEM.**INTELLIGENT ELECTRONIC CONTROL SYSTEM.

The computer-assisted Active Battery Management System permanently monitors and controls all the safety-related processes of the electrical components and associated hardware. This results in a whole range of advantages:

- MAXIMISED RUNNING TIMES
- OPTIMISED TOOL POWER
- **LONGER BATTERY SERVICE LIFE**
- INCREASED SAFET





## TWIN-PACK TECHNOLOGY. ONE BATTERY FOR ALL DEVICES.

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, **two 18 V batteries are simply combined in one 36 V device** thanks to Twin-Pack technology. Doubling the voltage automatically doubles the power.

Double Twin-Pack technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.





# SEALED TECHNOLOGY. THE NEXT GENERATION OF BATTERY TECHNOLOGY.

Waterproof and completely dust resistant? Yes, it is possible! Our Power X-Change batteries with SEALED technology are waterproof and dustproof according to protection class IP57. Whether it's water, or dust from wood or metal – the SEALED battery with the blue ring can withstand anything you throw at it and won't suffer damage even after 30 minutes in 1 m of water. Once it is dry, it can be used again as normal in all Einhell Power X-Change cordless tools.

With the SEALED batteries, Einhell is developing the next generation of rechargeable battery technology and once again demonstrating its concentrated expertise.







#### CORDLESS ROBOT LAWN MOWER WITHOUT PERIMETER WIRE -**DETECTS OBSTACLES AND BOUNDARIES**



#### PHYSICAL BOUNDARIES

e. g. walls, hedges, trees

#### **VISUAL BOUNDARIES**

e. g. bark mulch, tar, stones



- PXC system batteryMowing without perimeter wire
- Integrated camera and ultrasonic sensors
- ➤ Magnetic band for virtual borders (5 m, included in delivery)
- >>> Programmable operating times

#### **POWER X-CHANGE ROBOT LAWN MOWER** WITHOUT PERIMETER WIRE

#### FREELEXO CAM 500

PXC battery voltage	18 V	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>	
Cutting width	18 cm	
Cutting height adjustment	stepless / 20 - 60 mm / central	
Suitable for slopes up to	25 %	
Supplied with accessories	Magnetic band (5 m), 2 connection clamps, 3 spare blades	
Incl. 1 battery (18 V 3.0 Ah Li-ion)	Article number 3413991	4 006825 663525

- Mowing program for secondary areas
- >> Eco mode
- >> Impact, lift and tilt sensors
- >>> Brushless motor
- >> Supplied with charging unit (12 m guide wire included)



- >> PXC system battery
- Mowing without perimeter wire
- Integrated camera and ultrasonic sensors

- App (WiFi)
  LCD display
  Over-the-Air Update
- ➤ Magnetic band for virtual borders (5 m, included in delivery)

#### POWER X-CHANGE ROBOT LAWN MOWER WITHOUT PERIMETER WIRE

#### **FREELEXO CAM PLUS 600**

PXC battery voltage	18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	600 m <sup>2</sup>		
Cutting width	18 cm		
Cutting height adjustment	stepless / 20 - 60 mm / central		
Suitable for slopes up to	25 %		
Supplied with accessories	Magnetic band (5 m), 2 connection clamps, 3 spare blades		
Incl. 1 battery (18 V 4.0 Ah Li-ion)	Article number 3413975	4 006825 678413	

- >> Programmable operating time for each specific day
- Mowing program for secondary areas
- >> Eco mode
- >> Impact, lift and tilt sensors
- >>> Brushless motor
- > Supplied with charging unit (12 m guide wire included)






#### **CHECKLIST: IS MY GARDEN SUITABLE?**



Lawn area of uniformly green colour



Clearly defined and recognisable lawn edges\*



Simple design, uniform shape



Irregularities in colour (e.g. leaves, scorched areas)



No clearly recognisable lawn edges



Many separate areas, bottlenecks and recesses


#### MADE POSSIBLE BY A VIRTUAL FENCE - THANKS TO MAGNETIC BAND ACCESSORY

Lay the supplied magnetic band in the garden and it will act like a virtual fence. The magnet sensors installed in the FREELEXO CAM detect the magnetic band and turn away at its limits. In this way you can create off-limit areas at short notice.



# A TEMPORARY OFF-LIMITS AREA

When you want to hold a garden party and need to keep the robot lawn mower at a distance for the duration of the celebrations.




# FLOWER MEADOW IN THE GARTEN

A flower meadow in the garden is just beginning to grow and is attracting the first insects. Now is the wrong time for the robot lawn mower to pass through.



#### **NEWLY PLANTED TREE**

A tree has been newly planted in the lawn area and is still sensitive. To protect it from collisions with the robot lawn mower you can use the virtual fence.



## LAWN EDGES MADE BETTER

Lawn edges that are poorly defined or hard to recognise by the robot lawn mower can be upgraded by the magnetic band for optimum demarcation of the mowing area in the garden.

#### Robot Lawn Mowers without Perimeter Wire - Accessories



Туре	Article number	EAN	Items supplied	Suitable for
Robot Lawn Mower Garage	3414024	4 006825 654417	1 pc (foldable, l x w x h: 77.0 x 59.0 x 39.5 cm)	all Einhell robot lawn mowers (except FREELEXO 500 - 3413935)
Spare Blades	3414020	4 006825 648775	12 pcs	all Einhell robot lawn mowers
Cleaning Set	3414025	4 006825 657951	Gloves, cleaning brushes, abrasive pads, microfibre cloth, spatula, screwdriver	all Einhell robot lawn mowers
Magnetic Band Set 20 m	3414028	4 006825 670929	Magnetic band (length: 4 x 5 m), 20 fastening hooks	FREELEXO CAM

<sup>\*</sup> The lawn area needs to be checked for suitable lawn boundaries







- >> PXC system battery
- > App (Bluetooth + WiFi)
- Over-the-Air Update
- >> LED display
- >> Programmable operating time for each specific day
- >> Multi area mowing



- PXC system batteryApp (Bluetooth)LCD display

- >> Programmable operating time for each specific day

#### **POWER X-CHANGE ROBOT LAWN MOWERS**

#### **FREELEXO 500**

PXC battery voltage	18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>		
Cutting width	18 cm		
Cutting height adjustment	stepless / 30 - 60 mm / central		
Suitable for slopes up to	35 %		
Supplied with perimeter wire	130 m		
Supplied with fastening hooks	190 pcs		
Supplied with accessories	3 connecting clamps, 3 blades		
Incl. 1 battery (18 V 2.5 Ah Li-ion)	Article number 3413935	4 006825 682359	

- >> Spot Mowing
- ➤ Mowing program for secondary areas
- >> Eco mode
- Impact, lift and tilt sensorsBrushless motor
- >> Supplied with charging unit

#### **POWER X-CHANGE ROBOT LAWN MOWERS**

#### **FREELEXO 1200 LCD BT**

PXC battery voltage	18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1200 m²		
Cutting width	18 cm		
Cutting height adjustment	stepless / 20 - 60 mm / central		
Suitable for slopes up to	35 %		
Supplied with perimeter wire	210 m		
Supplied with fastening hooks	300 pcs		
Supplied with accessories	3 connecting clamps, 3 blades		
Incl. 1 battery (18 V 5.2 Ah Li-ion)	Article number 4326368	4 006825 653441	

- >> Multi area mowing
- >> Impact, lift and tilt sensors
- >> Brushless motor
- >> Supplied with charging unit

#### **Robot Lawn Mowers without Perimeter Wire - Accessories**









Туре	Article number	EAN	Items supplied	Suitable for
Robot Lawn Mower Garage	3414024	4 006825 654417	1 pc (foldable, l x w x h: 77.0 x 59.0 x 39.5 cm)	all Einhell robot lawn mowers
Robot Lawn Mower Garage	3414050	4 006825 685138	1 pc (l x w x h: 59.4 x 50.8 x 37.3 cm)	FREELEXO 500
Perimeter Wire	3414021	4 006825 648782	1 pc (50 m)	all Einhell robot lawn mowers
Spare Blades	3414020	4 006825 648775	12 pcs	all Einhell robot lawn mowers
Fastening Hooks	3414023	4 006825 648805	100 pcs	all Einhell robot lawn mowers
Connection Clamps	3414022	4 006825 648799	4 pcs	all Einhell robot lawn mowers
Repair Kit	3414026	4 006825 657968	5 m perimeter wire, 15 fastening hooks, 8 connecting clamps	all Einhell robot lawn mowers
Cleaning Set	3414025	4 006825 657951	Gloves, cleaning brushes, abrasive pads, microfibre cloth, spatula, screwdriver	all Einhell robot lawn mowers





#### **ROBOT LAWN MOWERS - COMPARISON OF FEATURES**



#### FREELEXO



























#### FREELEXO LCD BT























FREELEXO SMART













































#### PROFESSIONAL CORDLESS LAWN MOWER

#### **RASARRO 36/42**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 5.2 Ah	100 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	725 m <sup>2</sup>		
Cutting width	42 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	50		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	17.2 kg		
Incl. 2 batteries (18 V 5.2 Ah Li-lon) and 1 Twincharger	Article number 3413272	4 006825 669138	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>	725 m <sup>2</sup>	875 m <sup>2</sup>	1100 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405454	4 006825 651386
-------------	---------	-----------------

# >> Brushless motor Integrated carry handle Height-adjustable handlebar Folding handlebar Grass box with level indicator >> Wide wheels exert less stress on the lawn

#### PROFESSIONAL CORDLESS LAWN MOWER

#### **RASARRO 36/40**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m <sup>2</sup>		
Cutting width	40 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	50		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	17.4 kg		
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 1 Twincharger	Article number 3413278	4 006825 669121	

<b>IIII</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	220 m <sup>2</sup>	280 m <sup>2</sup>	330 m <sup>2</sup>	425 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	850 m <sup>2</sup>	1000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405454	4 006825 651386
-------------	---------	-----------------





# >>> Brushless motor Mulching function Integrated carry handle Height-adjustable (telescopic) long handle Folding handlebar Grass box with level indicator Wide wheels exert less stress on the lawn

#### PROFESSIONAL CORDLESS LAWN MOWER

#### **RASARRO 36/38**

KA3AKKU 30/30			
PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	450 m²		
Cutting width	38 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	45 l		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	15.5 kg		
Incl. 2 batteries (18 V   4.0 Ah   Li-lon) and 1 Twincharger	Article number 3413180 4 006825 635867		

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	250 m <sup>2</sup>	300 m <sup>2</sup>	330 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries watches watches)
   Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405486	4 006825 635843

# Integrated carry handle Height-adjustable handlebar Folding handlebar Grass box with level indicator Wide wheels exert less stress on the lawn

#### **CORDLESS LAWN MOWER**

#### **RASARRO 36/36**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 3.0 Ah	60 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	400 m²		
Cutting width	36 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	45 l		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	13.0 kg		
Incl. 2 batteries (18 V 3.0 Ah Li-lon) and 2 chargers	Article number 3413282 4 006825 669114		

Ī	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	2)	200 m <sup>2</sup>	250 m <sup>2</sup>	290 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	650 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405486	4 006825 635843
-------------	---------	-----------------





# Integrated carry handleHeight-adjustable handlebar Folding handlebarGrass box with level indicator >> Wide wheels exert less stress on the lawn

#### **CORDLESS LAWN MOWER**

#### **RASARRO 36/34**

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 3.0 Ah	60 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m²		
Cutting width	34 cm		
Cutting height adjustment	5 levels / 25 - 65 mm / central		
Grass box capacity	30		
Wheel diameter front / rear	150 mm / 180 mm		
Housing material	Plastic		
Product weight	13.9 kg		
Incl. 2 batteries (18 V 3.0 Ah Li-lon) and 2 chargers	Article number 3413222 4 006825 668605		

<b>(1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries watches with a least 2.3 Air
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405452	4 006825 610611
-------------	---------	-----------------



#### **CORDLESS LAWN MOWER**

#### GE-CM 36/43 Li M Brushless

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	600 m²		
Cutting width	43 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	63		
Wheel diameter front / rear	160 mm / 250 mm		
Housing material	Plastic		
Product weight	13.2 kg (excl. bat	tery)	
Incl. 2 batteries (18 V   4.0 Ah   Li-lon) and 2 chargers	Article number 3413240	4 006825 645866	
Without batteries / chargers	Article number 3413246	4 006825 648720	

<b>1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	225 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	600 m <sup>2</sup>	750 m <sup>2</sup>	900 m <sup>2</sup>	1200 m <sup>2</sup>

For best performance select batteries with at least 2.5  $\mbox{\sc Ah}$ 

 Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405451	
Spare blade	3 103 13 1	/ 004935 41040/





# Integrated carry handle Height-adjustable handlebar Folding handlebar Grass box with level indicator >> Wide wheels exert less stress on the lawn

#### **CORDLESS LAWN MOWER**

#### GE-CM 36/37 Li

PXC battery voltage	2x 18 V			
Cutting width	37 cm			
Cutting height adjustment	6 levels / 25 - 75 mm / central			
Grass box capacity	45 l			
Wheel diameter front / rear	150 mm / 220 mm			
Housing material	Plastic			
Product weight	13.5 kg			
Article only available without batteries / chargers	Article number 3413172	4 006825 635898		

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	200 m <sup>2</sup>	250 m <sup>2</sup>	290 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	650 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries required)
   Max, lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405486	4 006825 635843
-------------	---------	-----------------



#### **CORDLESS LAWN MOWER**

#### GE-CM 36/36 Li Brushless

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	400 m²		
Cutting width	36 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	40		
Wheel diameter front / rear	145 mm / 220 mm		
Housing material	Plastic		
Product weight	13.4 kg		
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 2 chargers	Article number 3413230 4 006825 645835		

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	175 m <sup>2</sup>	250 m <sup>2</sup>	270 m <sup>2</sup>	350 m <sup>2</sup>	400 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>	960 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405485	4 006825 584509
-------------	---------	-----------------







#### **CORDLESS LAWN MOWER**

#### GE-CM 36/34-1 Li

PXC battery voltage	2x 18 V		
Cutting width	33.5 cm		
Cutting height adjustment	5 levels / 25 - 65 mm / central		
Grass box capacity	30 l		
Wheel diameter front / rear	ont / rear 150 mm / 180 mm		
Housing material	Plastic		
Product weight	11.9 kg		
Article only available without batteries / chargers	Article number 3413226	4 006825 645026	

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries weld a least 2.3 Al
   Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405452	4 006825 610611
-------------	---------	-----------------



#### **CORDLESS LAWN MOWER**

#### GE-CM 36/33 Li

PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	50 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²		
Cutting width	33 cm		
Cutting height adjustment	5 levels / 25 - 65 mm / central		
Grass box capacity	30		
Wheel diameter front / rear	150 mm / 180 mm		
Housing material	Plastic		
Product weight	11.6 kg		
Incl. 2 batteries (18 V 2.5 Ah Li-lon) and 2 chargers	Article number 3413210 4 006825 645002		

<b>1111</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	800 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405452	4 006825 610611
-------------	---------	-----------------







#### **CORDLESS LAWN MOWER**

#### GE-CM 18/33 Li Brushless

GE CIVI 10/33 El DI GSINCSS				
PXC battery voltage	18 V			
Battery charging time 18 V / 4.0 Ah	75 min			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	200 m²			
Cutting width	33 cm			
Cutting height adjustment	5 levels / 25 - 65 mm / central			
Grass box capacity	30			
Wheel diameter front / rear	150 mm / 180 mm			
Housing material	Plastic			
Product weight	10.1 kg (excl. battery)			
Incl. 1 battery (18 V   4.0 Ah   Li-lon) and 1 charger	Article number 3413260	4 006825 646856		
Without battery / charger	Article number 3413266	4 006825 647686		

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	50 m <sup>2</sup>	100 m <sup>2</sup>	140 m <sup>2</sup>	180 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>

For best performance select a battery with at least 2.5  $\mbox{\sc Ah}$ 

- 1) Battery capacity
- <sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405452	4 006825 610611
-------------	---------	-----------------



#### **CORDLESS LAWN MOWER**

#### **GE-CM 18/32 Li Brushless**

PXC battery voltage	18 V		
Cutting width	32 cm		
Cutting height adjustment	3 levels / 30 - 70 mm / axial		
Grass box capacity	25		
Wheel diameter front / rear	140 mm / 140 mm		
Housing material	Plastic		
Product weight	8.5 kg		
Article only available without battery / charger	Article number 3413256	4 006825 645712	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	50 m <sup>2</sup>	100 m <sup>2</sup>	140 m <sup>2</sup>	180 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>

For best performance select a battery with at least 2.5  $\mbox{\sc Ah}$ 

- 1) Battery capacity
- Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405453	/ 004835 4/5774







#### **CORDLESS LAWN MOWER**

#### **GE-CM 18/30 Li Brushless**

01 Cili 10/00 II Di abili 055					
PXC battery voltage	18 V				
Battery charging time 18 V / 3.0 Ah	60 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	150 m²				
Cutting width	30 cm				
Cutting height adjustment	3 levels / 30 - 70 mm / axial				
Grass box capacity	25				
Wheel diameter front / rear	140 mm / 140 mm				
Housing material	Plastic				
Product weight	8.9 kg (excl. battery)				
Incl. 1 battery (18 V 3.0 Ah Li-lon) and 1 charger	Article number 3413155	4 006825 629163			
Without battery / charger	Article number 3413157	4 006825 631869			

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	30 m <sup>2</sup>	70 m <sup>2</sup>	100 m <sup>2</sup>	150 m <sup>2</sup>	210 m <sup>2</sup>	270 m <sup>2</sup>	300 m <sup>2</sup>	420 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

1) Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

3404553	4 006825 633092
	3404553



#### **CORDLESS LAWN MOWER**

#### GE-CM 36/48 Li M Brushless

PXC battery voltage	2x 18 V		
Cutting width	48 cm		
Cutting height adjustment	6 levels / 30 - 75 mm / axial		
Wheel diameter front / rear	180 mm / 180 mm		
Housing material	Steel		
Product weight	16.9 kg		
Article only available without batter-	Article number	4 006825 660654	
ies / chargers	3413054	4 1006825 660654	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	150 min	250 m <sup>2</sup>	260 m <sup>2</sup>	300 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>	1000 m <sup>2</sup>
3)	300 m <sup>2</sup>	500 m <sup>2</sup>	520 m <sup>2</sup>	600 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>	2000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries
 Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

3405456 Spare blade







- >> Highwheels
- Self-propelling
   Electric start function with PXC battery (18 V)
   Mulching function
- >> Height-adjustable long handle with soft grip
- >> Grass box with level indicator

#### **PETROL LAWN MOWER** (POWER X-CHANGE ELECTRIC START)

#### GC-PM 51/3 S HW-F Li

GC-FINI 31/3 3 HW-E LI				
Engine / displacement	4-stroke engine / 170 cm <sup>3</sup>			
Power / working speed	2.7 kW / 2900 mi	n <sup>-1</sup>		
PXC battery voltage	1x 18 V / 2.0 Ah			
Battery charging time 18 V / 2.0 Ah	2.5 h			
Cutting width	51 cm			
Cutting height adjustment	6 levels / 30 - 80 mm / central			
Grass box capacity	70			
Wheel diameter front / rear	204 mm / 280 mm			
Housing material	Powder-coated s	heet steel		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1800 m²			
Product weight	29.6 kg			
Incl. 1 battery (18 V 2.0 Ah Li-lon) and 1 charger	Article number 3404870	4 006825 655285		

	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
I	2)	130 starts	174 starts	218 starts	261 starts	347 starts	452 starts	522 starts	695 starts

Battery capacity
 Number of starts per battery charge - the possible number of starts depends on various influences, e.g. temperature of the engine, ambient temperature, etc.

Spare blade	3405660	4 006825 605273
Combination blade	3405650	4 006825 605266



#### **CORDLESS CYLINDER LAWN MOWER**

#### **GE-HM 18/38 Li**

PXC battery voltage	18 V			
Cutting width	38 cm			
Cutting height adjustment	4 levels / 14 - 38	mm		
Grass box capacity	45 I			
Number of mowing blades	5			
Mowing spindle diameter	125 mm			
Product weight	10.5 kg			
Article only available without battery / charger	Article number 3414200	4 006825 641639		


1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	100 m <sup>2</sup>	150 m <sup>2</sup>	190 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	600 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

1) Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)





>>> Flow rate adjustment (6-stage)

>> Individually adjustable spread width

Flow rate adjustment (8-stage)

Soft gripSuitable for gritting material

**>>>** 

>> Soft grip

>> Suitable for gritting material



#### **CORDLESS MULTIPURPOSE SPREADER**

#### **GE-SR 18/22 Li**

PXC battery voltage	18 V		
Capacity	22		
Spread width	max. 6 m		
Suitable for	Fertiliser, lawn seeds, salt		
Product weight	6.2 kg		
Article only available without battery / charger	Article number 3415430	4 006825 673142	

(	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	2)	3 h	4 h	5 h	7 h	8 h	10 h	11 h	15 h



#### **CORDLESS UNIVERSAL SPREADER**

#### GE-US 18 Li

PXC battery voltage	18 V		
Capacity	3.3		
Spread width	max. 5 m		
Suitable for	Fertiliser, lawn seeds, salt		
Product weight	1.2 kg		
Article only available without battery / charger	Article number 3415410	4 006825 638356	

I	<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
ſ	2)	2 h	3 h	4 h	6 h	7 h	9 h	10 h	14 h

<sup>1)</sup> Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge



#### **CORDLESS SCARIFIER/AERATOR**

#### GE-SA 36/35 Li Brushless

PXC battery voltage	2x 18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	550 m²		
Working width	35 cm		
Working depth adjustment	3 levels (central) + transport position		
Number of blades	16 pcs		
Wheel diameter front / rear	160 mm / 160 mm		
Housing material	Easy maintenance plastic housing		
Product weight	11.3 kg		
Number of aerator claws	24 pcs		
Article only available without batteries / chargers	Article number 3420685 4 006825 662375		

<b>IIII</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	100 m <sup>2</sup>	150 m <sup>2</sup>	190 m <sup>2</sup>	225 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>

<sup>1)</sup> Battery capacity (2x batteries required)

Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509

<sup>&</sup>lt;sup>1)</sup> Battery capacity <sup>2)</sup> Max. operating time per battery charge







#### CORDLESS SCARIFIER/AERATOR

#### GE-SC 36/35 Li Brushless

de-3c 30/33 El Di d3ille33				
PXC battery voltage	2x 18 V			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	550 m²			
Working width	35 cm			
Working depth adjustment	3 levels (central) + transport position			
Number of blades	16 pcs			
Wheel diameter front / rear	160 mm / 160 mi	m		
Housing material	Easy maintenance	e plastic housing		
Product weight	9.9 kg			
Article only available without batteries / chargers	Article number 3420680	4 006825 661439		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	100 m <sup>2</sup>	150 m <sup>2</sup>	190 m <sup>2</sup>	225 m <sup>2</sup>	300 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>

1) Battery capacity (2x batteries required)

<sup>&</sup>lt;sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509



#### **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 36/31 Li

GC 5C 50/51 L.			
PXC battery voltage	2x 18 V		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m²		
Working width	31 cm		
Working depth adjustment	3 levels + parking position		
Number of blades	8 double-knives		
Wheel diameter front / rear	180 mm / 100 mm		
Housing material	Plastic		
Product weight	8.0 kg		
Article only available without batteries / chargers	Article number 3420660 4 006825 636956		

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	80 m <sup>2</sup>	100 m <sup>2</sup>	130 m <sup>2</sup>	200 m <sup>2</sup>	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405577	4 006825 629699
Aerator Roller	3405572	4 006825 629675
Scarifier Roller	3405582	4 006825 629682







#### **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 18/28 Li Brushless

PXC battery voltage	18 V		
For lawn areas of up to approx. (The			
stated area coverage is based on	350 m <sup>2</sup>		
the assumption of ideal conditions)			
Working width	28 cm		
Working depth adjustment	ustment 3 levels + parking position		
Number of blades	12 pcs		
Wheel diameter front / rear	150 mm / 100 mr	m	
Housing material	Plastic		
Product weight	6.6 kg		
Article only available without battery	Article number	4 006825 655223	
/ charger	3420604	4 1006825 655223	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	60 m <sup>2</sup>	80 m <sup>2</sup>	100 m <sup>2</sup>	120 m <sup>2</sup>	160 m <sup>2</sup>	210 m <sup>2</sup>	240 m <sup>2</sup>	350 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405940	4 006825 658798
Aerator Roller	3405941	4 006825 658804
Scarifier Roller	3405942	4 006825 658811



#### **CORDLESS SCARIFIER/AERATOR**

#### GC-SC 18/28 DS Li Brushless

PXC battery voltage	18 V (+ 18 V)				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²				
Working width	28 cm				
Working depth adjustment	3 levels + parking position				
Number of blades	12 pcs				
Wheel diameter front / rear	150 mm / 100 mr	m			
Housing material	Plastic				
Product weight	6.7 kg				
Article only available without battery / charger	Article number 3420625	4 006825 682496			

I	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
ſ	2)	120 m <sup>2</sup>	160 m <sup>2</sup>	200 m <sup>2</sup>	240 m <sup>2</sup>	320 m <sup>2</sup>	420 m <sup>2</sup>	480 m <sup>2</sup>	700 m <sup>2</sup>

For best performance select a battery with at least 2.5 Ah

1) Battery capacity

<sup>2)</sup> Max. lawn area that can be scarified per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Catch bag	3405940	4 006825 658798
Aerator Roller	3405941	4 006825 658804
Scarifier Roller	3405942	4 006825 658811





- > Height-adjustable wheels for easy transportation
- Folding handlebarBrake shoe
- >> Two-point-safety switch
- >> Soft grip



- Folding handle (split shaft)Electronic speed controlIntegrated carrying handle

- >> Two-point-safety switch
- >> Soft grip

#### **CORDLESS TILLER**

#### GE-CR 30 Li

PXC battery voltage	2x 18 V			
Working width	30 cm			
Working depth	200 mm			
Number of blades	4 pcs			
Cultivator blade diameter	200 mm			
Housing material	Plastic			
Product weight	11.0 kg			
Article only available without batteries / chargers	Article number 3431200	4 006825 615203		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	15 min	20 min	21 min	25 min	35 min	50 min	60 min	70 min

For best performance select batteries with at least 2.5 Ah

- <sup>1)</sup> Battery capacity (2x batteries required)
- <sup>2)</sup> Max. operating time per battery charge

#### **CORDLESS TILLER**

#### GE-CR 18/20 Li E

PXC battery voltage	18 V	
Working width	20 cm	
Working depth	200 mm	
Number of blades	4 pcs	
Cultivator blade diameter	155 mm	
Housing material	Plastic	
Product weight	3.9 kg	
Article only available without battery	Article number	4 006825 654974
/ charger	3431210	4   006825  654974

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	20-25	20-35	30-40	40-50	50-70	70-90	80-100	100-140
	min							

#### >> Brushless motor

- >> Snow ejection direction adjustable
- >> Electronic speed control

- Battery cover
  Additional handle
  Integrated carrying handle
- >> Soft grip
- Self-standingTwo-point-safety switch



#### **GE-ST 36/40 Li E Brushless**

PXC battery voltage	2x 18 V		
Working width	40 cm		
Max. snow height	20 cm		
Throwing distance max.	6 m		
Housing material	Plastic		
Product weight	6.5 kg		
Article only available without batter-	Article number	4 006825 659979	
ies / chargers	3417011	4 "006825" 659979"	

	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
ſ	2)	15 min	20 min	25 min	30 min	40 min	50 min	60 min	80 min

For best performance select batteries with at least 4.0 Ah

- Battery capacity (2x batteries required)
   Max. operating time per battery charge (specified performance is based on the assumption of ideal conditions)

Battery capacity
 Max. running time per battery charge - depending on the selected speed







#### **CORDLESS SCYTHE**

#### **AGILLO 36/255**

PXC battery voltage	2x 18 V
Cutting width (blade)	25.5 cm
Cutting width (thread)	30 cm
Thread diameter	2.0 mm
Thread length	8 m
Product weight	6.1 kg
Blades	•
Thread spool	•
Comfort harness	•
Article only available without batter-	Article number
ies / chargers	3411320 4 006825 629583

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	20 min	30 min	35 min	45 min	65 min	80 min	90 min	130 min
<b>3)</b>	15 min	25 min	28 min	35 min	45 min	60 min	70 min	90 min

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries required)
   Max. operating time per battery charge in idle mode (blade)
   Max. operating time per battery charge in idle mode (thread spool)

#### **CORDLESS SCYTHE**

#### **AGILLO 18/200**

PXC battery voltage	18 V		
Cutting width (blade)	20 cm		
Cutting width (thread)	30 cm		
Thread diameter	2.0 mm		
Thread length	8 m		
Product weight	6.5 kg		
Blades	•		
Thread spool	•		
Comfort harness	•		
Article only available without battery	Article number 4 006825 651300		
/ charger	3411310 4 006825 651300		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	15 min	20 min	25 min	35 min	50 min	65 min	75 min	100 min
<b>3)</b>	10 min	12 min	15 min	20 min	30 min	45 min	55 min	60 min

For best performance select a battery with at least 2.5 Ah

- Battery capacity
   Max. operating time per battery charge in idle mode (blade)
   Max. operating time per battery charge in idle mode (thread spool)

#### **Cordless Scythes Accessories**

Spare Line Spool	Article number 3405096	4 006825 632767
Special Grass Blade 230	Article number 3436660	4 006825 637953
Thicket Blade 255	Article number 3405082	4 006825 632774
Thicket Blade 200	Article number 3405083	4 006825 651454
Grass Blade 255	Article number 3404996	4 006825 607239
Grass Blade 230	Article number 3436661	4 006825 637960







- Flower guardAutomatic jog line feed
- **>>>** Split shaft
- >> Electronic speed control
- Soft gripWall bracket

#### **CORDLESS LAWN TRIMMER**

#### GE-CT 36/30 Li E

PXC battery voltage	2x 18 V			
Cutting width	30 cm			
Thread diameter	2.0 mm			
Thread length	8 m			
Product weight	3.1 kg			
Thread spool	•			
Carrying strap	•			
Article only available without batteries / chargers	Article number 3411300	4 006825 629187		

<b>IIII</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2	20 min	30 min	38 min	45 min	60 min	75 min	90 min	120 min

For best performance select batteries with at least 2.5 Ah

- <sup>1)</sup> Battery capacity (2x batteries required)
- <sup>2)</sup> Max. operating time per battery charge in idle mode

Spare line spool	3405096	4 006825 632767
------------------	---------	-----------------

## Long handle with ergonomic double bendInfinitely adjustable long handle

- Flower guardAutomatic jog line feed
- >> Split shaft
- >> 2-step electronic speed control
- >> Battery Protector
- >> Soft grip



>> Flower guard Automatic jog line feed

>> Soft grip

Tested and recommended by Forum: Gesunder Rücken - besser leben e.V. and Bundesverband deutscher Rückenschulen (BdR) e.V.

More information available from: AGR e.V., Stader Str. 6, 27432 Bremervörde, Tel. +49 4761/92 63 580, www.agr ev.de

**≫** Motor head rotatable (90°) / tiltable (6 settings)

>> Telescopic long handle, infinitely adjustable

#### CORDLESS LAWN TRIMMER

#### GE-CT 18/33 Li E

PXC battery voltage	18 V	
Cutting width	33 cm	
Thread diameter	2.0 mm	
Thread length	8 m	
Product weight	2.7 kg	
Thread spool	•	
Carrying strap	•	
Article only available without battery	Article number	4 006825 671186
/ charger	3411270	4 1006825 671186

ſ	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
Ī	<b>&gt;&gt;&gt;</b> 2)	15 min	20 min	25 min	30 min	40 min	50 min	60 min	80 min

Battery capacity
 Max. operating time per battery charge in idle mode

Spare line spool	3405096	4 006825 632767
------------------	---------	-----------------

#### **CORDLESS LAWN TRIMMER**

#### **GE-CT 18/30 Li**

PXC battery voltage	18 V	
Cutting width	30 cm	
Thread diameter	1.6 mm	
Thread length	5 m	
Product weight	2.1 kg	
Thread spool	•	
Article only available without battery	Article number	4 006825 659399
/ charger	3411250	4 "006825"659399"

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	20 min	30 min	38 min	45 min	60 min	75 min	90 min	120 min

Battery capacity
 Max. operating time per battery charge in idle mode

Spare line spool	3405117	4 006825 662962
Spare line spool	3403117	4 006825 662962



#### > Adjustable handle

Telescopic long handle

➤ Motor head rotatable (180°) / tiltable (3 settings)

Flower guard

Soft gripIncl. Trimmer CartAutomatic feeding line spool



#### **CORDLESS LAWN TRIMMER**

#### **GE-CT 18/28 Li TC**

PXC battery voltage	18 V	
Cutting width	28 cm	
Thread diameter	1.6 mm	
Thread length	5 m	
Product weight	4.9 kg	
Article only available without battery / charger	Article number 3411212	4 006825 654967

[1111	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b>	<sup>2)</sup>	30 min	40 min	45 min	50 min	60 min	70 min	90 min	120 min

Battery capacityMax. operating time per battery charge in idle mode

Spare line spool	3405116	
Spare line spool	3405116	4 006825 655216



#### **GE-CT 18/28 Li**

PXC battery voltage	18 V	
Cutting width	28 cm	
Thread diameter	1.6 mm	
Thread length	5 m	
Product weight	2.3 kg	
Article only available without battery / charger	Article number 3411242	4 006825 655193

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	30 min	40 min	45 min	50 min	60 min	70 min	90 min	120 min

Battery capacity
 Max. operating time per battery charge in idle mode

Spare line spool	3405116	4 006825 655216

### **CORDLESS LAWN TRIMMER**

#### GE-CT 18 Li

PXC battery voltage	18 V		
Battery charging time 18 V / 2.5 Ah	50 min		
Max. running time	65 min		
Cutting width	24 cm		
Product weight	1.8 kg (excl. battery)		
Plastic blades included	• (20 pcs)		
Incl. 1 battery (18 V 2.5 Ah Li-lon) and 1 charger	Article number 3411219	4 006825 680812	
Without battery / charger	Article number 3411172	4 006825 588255	

	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
I	2)	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

Battery capacityMax. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283

>> Telescopic long handle

Motor head rotatable (180°) / tiltable (3 settings)

Infinitely adjustable long handle
 Telescopic long handle, infinitely adjustable
 Motor head rotatable (+/- 90°) / tiltable

Flower guard
Storage compartment for spare blades
Soft grip

>> Flower guard

(5 settings)

>> Soft grip

>> Automatic feeding line spool

<sup>&</sup>gt;> Adjustable handle







#### **CORDLESS LAWN TRIMMER**

#### **GE-CT 18/25 Li**

PXC battery voltage	18 V	
Cutting width	25 cm	
Product weight	2.0 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery / charger	Article number 3411255	4 006825 680416

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	32 min	42 min	53 min	63 min	84 min	110 min	126 min	168 min
3)	30 min	40 min	50 min	60 min	80 min	104 min	120 min	160 min

Battery capacity
 Max. operating time per battery charge in idle mode (blade)
 Max. operating time per battery charge in idle mode (thread spool)

Spare line spool	3405113	4 006825 680393
20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147
Thread head set	3405175	4 006825 680454

#### **CORDLESS LAWN TRIMMER**

#### GE-CT 18/25-1

PXC battery voltage	18 V	
Cutting width	25 cm	
Product weight	2.0 kg	
Plastic blades included	• (20 pcs)	
Thread Head Set	•	
Article only available without battery / charger	Article number 3411256	4 006825 684117

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	32 min	42 min	53 min	63 min	84 min	110 min	126 min	168 min
3)	30 min	40 min	50 min	60 min	80 min	104 min	120 min	160 min

Battery capacity

<sup>&</sup>lt;sup>3)</sup> Max. operating time per battery charge in idle mode (thread spool)

Spare line spool	3405113	4 006825 680393
20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147

#### **CORDLESS LAWN TRIMMER**

#### GC-CT 18/24 Li

PXC battery voltage	18 V	
Cutting width	24 cm	
Product weight	1.3 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery / charger	Article number 3411123	4 006825 626582

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

<sup>1)</sup> Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode (blade)







#### **CORDLESS LAWN TRIMMER**

#### GC-CT 18/24 Li P

PXC battery voltage	18 V			
Battery charging time 18 V / 1.5 Ah	120 min			
Max. running time	40 min			
Cutting width	24 cm			
Product weight	1.2 kg (excl. battery)			
Plastic blades included	• (20 pcs)			
Incl. 1 battery (18 V 1.5 Ah Li-lon) and 1 charger	Article number 3411102	4 006825 626575		
Without battery / charger	Article number 3411104	4 006825 635690		

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> 2)	40 min	55 min	65 min	80 min	125 min	160 min	180 min	250 min

Display Battery capacity
Max. operating time per battery charge in idle mode

20-piece spare blade set	3405730	4 006825 560404
50-piece spare blade box	3405736	4 006825 646283

#### **NEW**

- >> Motor head rotatable 180°
- Soft gripInnovative blade technology



#### **CORDLESS LAWN TRIMMER**

#### GC-CT 18/2411 Li P

PXC battery voltage	18 V	
Cutting width	24 cm	
Product weight	1.2 kg	
Plastic blades included	• (20 pcs)	
Article only available without battery	Article number	4 006825 680409
/ charger	3411115	4 006825 680409

I	<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
ſ	2)	35 min	46 min	58 min	69 min	92 min	120 min	138 min	184 min

<sup>1)</sup> Battery capacity

Max. operating time per battery charge in idle mode

20-piece spare blade set	3405738	4 006825 681130
50-piece spare blade box	3405739	4 006825 681147

# Infinitely adjustable long handle Split shaft Cutting depth adjustment Rollers Soft grip

#### **CORDLESS LAWN EDGE TRIMMER**

#### GE-LE 18/190 Li

PXC battery voltage	18 V	
Min. cutting depth	34 mm	
Max. cutting depth	38 mm	
Blade length	178 mm	
Product weight	3.0 kg	
Article only available without battery / charger	Article number 3424300	4 006825 651287

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	20 min	25 min	33 min	45 min	55 min	65 min	75 min	110 min

Battery capacity
 Max. operating time per battery charge in idle mode

Spare blade	3405101	4 006825 653533
-------------	---------	-----------------





#### **NEW**

Summer 2025

- >> Electronic speed control
- Height-adjustable guide wheel
   Infinitely adjustable long handle
   Adjustable additional handle incl. brush storage compartment
   Brush change without tools





- >> Forward/reverse running
- >> Electronic speed control

Brush change without tools
Telescopic long handle, infinitely adjustable
2-in-1 function: wet and dry cleaning



#### GE-CC 18/110 Li E

PXC battery voltage	18 V	
Diameter of brush	110 mm	
Product weight	2.3 kg	
Incl. steel brush (15 mm wide)	•	
Incl. nylon brush (10 mm wide)	•	
Article only available without battery / charger	Article number 3424070	4 006825 681918

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	40-55	55-70	70-85	80-110	110-140	140-165	165-220	220-280
	min	min	min	min	min	min	min	min

 $<sup>^{\</sup>rm 10}$  Battery capacity  $^{\rm 20}$  Max. operating time per battery charge in idle mode - depending on the selected speed

Spare brush steel (15 mm)	3424140	4 006825 683127
Spare brush nylon (10 mm)	3424145	4 006825 683134
Spare brush set (steel 10 mm/nylon 6 mm)	3424150	4 006825 683141

#### **CORDLESS SURFACE BRUSH**

#### PICOBELLA 18/215

PXC battery voltage	18 V		
Max. working width	215 mm		
Diameter of brush	115 mm		
Idle speed	800 - 1400 min <sup>-1</sup>		
Product weight	4.1 kg		
Incl. surface brush	MEDIUM (smooth stone, e.g. tiles and concrete)		
Article only available without battery / charger	Article number 3424200	4 006825 645767	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	8-25 min	10-30 min	12-34 min	17-46 min	20-55 min	25-70 min	29-90 min	40-110 min

#### **Surface Brush PICOBELLA 18/215 Accessories**









unide Brush Ficobella 16/213 Accessories								
Туре	Article number	EAN	Material	Working width	Diameter of brush	Suitable for		
Surface Brush SOFT	3424121	4 006825 646252	Nylon	195 mm	115 mm	Wood, artificial turf		
Surface Brush MEDIUM (incl. side brush)	3424120	4 006825 646245	Nylon	215 mm	115 mm	stone		
Surface Brush ULTRA	3424122	4 006825 646269	Steel	195 mm	115 mm	stone (robust)		
Surface Brush ULTRA (incl. side brush)	3424126	4 006825 660845	Steel	215 mm	115 mm	stone (robust)		

 $<sup>^{9}\,</sup>$  Battery capacity  $^{20}\,$  Max. operating time per battery charge in idle mode — dependent on the selected speed







- >> Splash water protection IPX4
- >> Electronic speed control (2 settings)
- >> Toolless brush/pad change
- >> Battery cover
- Splash guard brush cover (removable)
   Multifunctional application for indoor/outdoor, for furniture, car, garden, kitchen/bathroom

#### **CORDLESS SURFACE BRUSH**

#### PICOBELLA 18/90

PXC battery voltage	18 V		
Working width	90-170 mm		
Bristle length	20-50 mm		
Idle speed	190 - 350 min <sup>-1</sup>		
Product weight	1.5 kg		
Brushes included	SOFT 120/50 + MEDIUM 90/20		
Pad set included	• (melamine, microfibre, kitchen fibre - 1 of each)		
Wall mount included	•		
Article only available without battery / charger	Article number 3424220	4 006825 671759	

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	110-160	150-210	190-260	225-315	300-420	390-550	450-630	600-840
	min							

Battery capacity

#### **Surface Brush PICOBELLA 18/90 Accessories**



Max. operating time per battery charge in idle mode – dependent on the selected speed







#### **CORDLESS HEDGE TRIMMER**

#### GE-CH 36/65 Li

PXC battery voltage	2x 18 V	
Bar length	720 mm	
Cutting length	650 mm	
Spacing between teeth	30 mm	
Product weight	4.0 kg	
Protective cover with wall mount	•	
Article only available without batter-	Article number	4 006825 639018
ies / chargers	3410960	4 "006825"639018"

<b>1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	60 min	75 min	93 min	120 min	150 min	180 min	225 min	300 min



#### **CORDLESS HEDGE TRIMMER**

#### GE-CH 36/61 Li

PXC battery voltage	2x 18 V	
Bar length	670 mm	
Cutting length	610 mm	
Spacing between teeth	26 mm	
Product weight	2.8 kg	
Protective cover with wall mount	•	
Article only available without batteries / chargers	Article number 3410965	4 006825 662382

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> <sup>2)</sup>	54 min	72 min	80 min	105 min	144 min	168 min	210 min	288 min

# >> Turnable rear handle >> Ergonomic front handle thanks to micro switches >> Cutting collector >> Laser-cut and diamond-ground blades >> Metal gear box >> Soft grip ➤ Aluminium cover over cutters

#### **CORDLESS HEDGE TRIMMER**

#### **GE-CH 18/60 Li**

PXC battery voltage	18 V	
Bar length	670 mm	
Cutting length	600 mm	
Spacing between teeth	22 mm	
Product weight	2.8 kg	
Protective cover with wall mount	•	
Article only available without battery / charger	Article number 3410930	4 006825 635942

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	35 min	45 min	53 min	70 min	90 min	110 min	135 min	180 min

Battery capacity

Battery capacity (2x batteries required)
 Max. operating time per battery charge in idle mode

Battery capacity (2x batteries required)
 Max. operating time per battery charge in idle mode

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode



>> Aluminium cover over cutters





#### **CORDLESS HEDGE TRIMMER**

#### **ARCURRA 18/55**

PXC battery voltage	18 V	
Bar length	620 mm	
Cutting length	550 mm	
Spacing between teeth	18 mm	
Product weight	2.7 kg	
Protective cover with wall mount	•	
Article only available without battery / charger	Article number 3410920	4 006825 635935

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2)</b>	35 min	45 min	53 min	70 min	90 min	110 min	135 min	180 min

- Max. operating time per battery charge in idle mode



#### **CORDLESS HEDGE TRIMMER**

#### GC-CH 1855/1 Li

GC C11 1055/ 1 E1		
PXC battery voltage	18 V	
Battery charging time 18 V / 2.5 Ah	50 min	
Max. running time	100 min	
Bar length	620 mm	
Cutting length	550 mm	
Spacing between teeth	18 mm	
Product weight	2.3 kg	
Protective cover with wall mount	•	
Incl. 1 battery (18 V 2.5 Ah Li-lon) and 1 charger	Article number 3410506	4 006825 661910
Without battery / charger	Article number 3410502	4 006825 615937

1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	60 min	80 min	100 min	120 min	160 min	210 min	240 min	320 min

- Battery capacity
   Max. operating time per battery charge in idle mode

# Turnable rear handleLaser-cut and diamond-ground blades Laser-cut and diMetal gear box >> Soft grip >> Aluminium cover over cutters

#### **CORDLESS HEDGE TRIMMER**

#### GC-CH 18/50 Li

PXC battery voltage	18 V	
Bar length	550 mm	
Cutting length	500 mm	
Spacing between teeth	17 mm	
Product weight	2.2 kg	
Protective cover with wall mount	•	
Article only available without battery / charger	Article number 3410945	4 006825 664522

	1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
ſ	2)	40 min	53 min	67 min	80 min	106 min	139 min	160 min	212 min

- 1) Battery capacity
- <sup>2)</sup> Max. operating time per battery charge in idle mode







#### **CORDLESS HEDGE TRIMMER**

#### GC-CH 1846 Li

PXC battery voltage	18 V	
Bar length	520 mm	
Cutting length	460 mm	
Spacing between teeth	15 mm	
Product weight	2.0 kg	
Protective cover with wall mount	•	
Article only available without battery / charger	Article number 3410642	4 006825 588293

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	60 min	80 min	100 min	120 min	160 min	210 min	240 min	320 min

Battery capacity
 Max. operating time per battery charge in idle mode



#### **CORDLESS HEDGE TRIMMER**

#### GC-CH 18/40 Li

PXC battery voltage	18 V	
Bar length	475 mm	
Cutting length	400 mm	
Spacing between teeth	13 mm	
Product weight	2.0 kg	
Protective cover with wall mount	•	
Article only available without battery / charger	Article number 3410940	4 006825 661125

		2.0 Ah						
2)	40 min	53 min	67 min	80 min	106 min	139 min	160 min	212 min


Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode



#### **Maintenance Spray**

Suitable for	Hedge trimmers, grass and shrub shears
Article number	3403099
EAN	4 006825 654608



- > Changeable carbon pins

GE-FS 18/53 Li		
PXC battery voltage	18 V	
Max. working width	53 cm	
Min. working width	28 cm	
Pin length	31 cm	
Product weight	4.4 kg	
Article only available without battery / charger	Article number 3411400	4 006825 670738

**CORDLESS OLIVE AND FRUIT HARVESTER** 

1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	20-34 min	27-45 min	34-56 min	40-68 min	54-90 min	69-117 min	80-136 min	108-181 min

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode - depending on the selected speed

Spare pins for PXC Olive and Fruit Har- vester, 4 pcs	3405231	4 006825 672886





#### >>> Brushless motor



#### **CORDLESS MULTIFUNCTIONAL TOOL**

#### **GE-LM 36/4in1 Li Brushless**

PXC battery voltage	2x 18 V			
Bar length (chainsaw)	200 mm			
Chain cutting speed	10 m/s			
Blade length of hedge trimmer	450 mm			
Spacing between teeth (hedge trimmer)	24 mm			
Cutting width (blade)	255 mm			
Cutting width (thread)	330 mm			
Max. working height of elevated	3.5 m (pruner) /			
tools	3.5 m (hedge trimmer)			
Product weight	9.0 kg (incl. all attachments)			
Protective cover with wall mount	•			
Article only available without batteries / chargers	Article number 3410901 4 006825 651638			

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	26 min	34 min	41 min	54 min	68 min	86 min	108 min	136 min
<b>3)</b>	20 min	27 min	33 min	44 min	54 min	66 min	88 min	108 min
**** 4)	20 min	28 min	33 min	40 min	56 min	66 min	80 min	112 min
<b>3333</b> 5)	60 pcs	80 pcs	100 pcs	120 pcs	160 pcs	200 pcs	240 pcs	320 pcs

- 1) Battery capacity (2x batteries required)

- Max. operating time per battery charge in idle mode (scythe)

  Max. operating time per battery charge in idle mode (scythe)

  Max. operating time per battery charge in idle mode (telescopic hedge trimmer)

  Max. operating time per battery charge in idle mode (telescopic hedge trimmer)
- Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner)

Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20 cm 1,1	4500117	4 006825 569100
Thicket blade 255 mm	3405082	4 006825 632774
Spare spool	3405102	4 006825 674224

# **OREGON** >> Continuously adjustable telescopic aluminium handle >> Main handle + motor head tiltable by several settings OREGON quality bar and chain Toolless chain tensioning and changing Pivotable attachment for effortless horizontal cuts Automatic chain lubrication Laser-cut and diamond-ground blades > Adjustable second handle

#### **CORDLESS MULTIFUNCTIONAL TOOL**

#### GE-HC 18 Li T

FITTED WITH

PXC battery voltage	18 V		
Battery charging time 18 V / 3.0 Ah	60 min		
Max. running time	40 min		
Bar length (chainsaw)	200 mm		
Chain cutting speed	3.76 m/s		
Max. bar length (hedge trimmer)	450 mm		
Spacing between teeth (hedge trimmer)	16 mm		
Max. working height	4.0 m (pruner) / 3.5 m (hedge trimmer)		
Product weight	6.2 kg (incl. all attachments. excl. battery)		
Incl. 1 battery (18 V 3.0 Ah Li-lon) and 1 charger	Article number 3410805	4 006825 601329	
Without battery / charger	Article number 3410800	4 006825 601275	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	30 pcs	40 pcs	48 pcs	60 pcs	75 pcs	100 pcs	120 pcs	150 pcs
3)	20 min	30 min	35 min	40 min	60 min	75 min	80 min	120 min

For best performance select a battery with at least 2.5 Ah

- 1) Battery capacity
- <sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner)
- <sup>3)</sup> Max. operating time per battery charge in idle mode (telescopic hedge trimmer)

Spare chain 20cm 1,3 33T 3/8	4500188	4 006825 606355
Spare bar 20cm 1,3	4500168	4 006825 606348





# OREGON Continuously adjustable telescopic aluminium handle Main handle + motor head tiltable by several settings OREGON quality bar and chain Toolless chain tensioning and changingPivotable attachment for effortless horizontal cuts >> Automatic chain lubrication Claw stopMetal gear box > Adjustable second handle

#### **CORDLESS POLE-MOUNTED PRUNER**

#### GE-LC 18 Li T

PXC battery voltage	18 V	
Bar length	200 mm	
Cutting length	170 mm	
Cutting speed	3.76 m/s	
Max. working height	4.0 m	
Product weight	4.0 kg	
Article only available without battery	Article number	4 006825 604337
/ charger	3410810	4   006825  604337

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	30 pcs	40 pcs	48 pcs	60 pcs	75 pcs	100 pcs	120 pcs	150 pcs

For best performance select a battery with at least 2.5 Ah

<sup>&</sup>lt;sup>1)</sup> Battery capacity
<sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,3 33T 3/8	4500188	4 006825 606355
Spare bar 20cm 1,3	4500168	4 006825 606348



#### **Hedge Trimmer**

Can be used for	GE-LC 18 Li T
Product weight	1.4 kg
Article number	3410818
EAN	4 006825 624649



OREGON quality bar and chain
 Chain tensioning and changing with tools
 Automatic chain lubrication



#### **CORDLESS POLE-MOUNTED PRUNER**

#### GC-LC 18/20 Li T

FITTED WITH

PXC battery voltage	18 V	
Bar length	200 mm	
Cutting length	195 mm	
Cutting speed	5.5 m/s	
Max. working height	4.0 m	
Product weight	3.4 kg	
Article only available without battery / charger	Article number 3410581	4 006825 652123

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	37 pcs	50 pcs	65 pcs	75 pcs	100 pcs	130 pcs	155 pcs	200 pcs

For best performance select a battery with at least 2.5 Ah

Battery capacity
 Max. cuts through 70 x 70 mm square timber per battery charge


Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20 cm 1,1	4500117	4 006825 569100





#### >> Continuously adjustable telescopic aluminium handle

- Continuously adjustable telescopic alumi
   Motor head tiltable by multiple settings
   Main handle tiltable by multiple settings
   Laser-cut and diamond-ground blades
   Metal gear box
   Adjustable second handle





#### **GE-HH 18/45 Li T**

PXC battery voltage	18 V			
Bar length	450 mm			
Cutting length	400 mm			
Spacing between teeth	n teeth 16 mm			
Max. working height	3.5 m			
Product weight	4.3 kg			
Article only available without battery	Article number	4 006825 630602		
/ charger	3410866 4 006825 630602			

Ī	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	2)	20 min	30 min	35 min	40 min	60 min	75 min	80 min	120 min

For best performance select a battery with at least 2.5 Ah

Battery capacity
Max. operating time per battery charge in idle mode



#### **Pole Pruner**

Can be used for	GE-HH 18/45 Li T
Product weight	1.2 kg
Article number	3410835
EAN	4 006825 624656



#### **CORDLESS TELESCOPIC HEDGE TRIMMER**

#### GC-HH 18/45 Li T

PXC battery voltage	18 V				
Bar length	450 mm				
Cutting length	410 mm				
Spacing between teeth	18 mm				
Max. working height	3.5 m				
Product weight	3.0 kg				
Article only available without battery / charger	Article number 3410585	4 006825 652130			

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	20 min	28 min	33 min	40 min	56 min	66 min	80 min	112 min

Battery capacityMax. operating time per battery charge in idle mode







- >> Brushless motor
- >> OREGON quality bar and chain
- >> Toolless chain tensioning and changing
- > Automatic chain lubrication
- ➤ Adjustable chain speed (High/Eco)
- >> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- >> Soft grip
- > Large oil filler opening

#### **NEW**



- >> Brushless motor
- >> Toolless chain tensioning and changing
- >> Automatic chain lubrication
- >> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- >> Soft grip
- > Large oil filler opening



- >> Toolless chain tensioning and changing
- >> Automatic chain lubrication
- Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- Soft gripLarge oil filler opening

#### **CORDLESS CHAINSAW**

#### FORTEXXA 18/30

PXC battery voltage	18 V		
Petrol equivalence class	up to 2.0 hp		
Bar length	300 mm		
Cutting length	270 mm		
Cutting speed	8.9 / 6 m/s		
Oil tank capacity	160 ml		
Product weight	4.0 kg		
Protective cover	•		
Article only available without battery / charger	Article number 4600010	4 006825 656572	

1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	53 pcs	70 pcs	88 pcs	105 pcs	140 pcs	182 pcs	210 pcs	280 pcs
<b>3)</b>	59 pcs	78 pcs	98 pcs	117 pcs	156 pcs	203 pcs	234 pcs	312 pcs

For best performance select a battery with at least 4.0 Ah

- 1) Battery capacity
- <sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge in HIGH POWER mode
- <sup>3)</sup> Max. cuts through 70 x 70 mm square timber per battery charge in ECO mode

Spare chain 30cm 1,1 45T 3/8	4500192	4 006825 663532
Spare bar 30cm 1,1	4500191	4 006825 663518

#### **CORDLESS CHAINSAW**

#### **GE-LC 18/25 Li Brushless**

PXC battery voltage	18 V		
Petrol equivalence class	up to 2.0 hp		
Bar length	250 mm		
Cutting length	230 mm		
Cutting speed	7.0 m/s		
Oil tank capacity	150 ml		
Product weight	3.5 kg		
Protective cover	•		
Article only available without battery / charger	Article number 4600070	4 006825 682977	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	34 pcs	44 pcs	67 pcs	71 pcs	100 pcs	145 pcs	181 pcs	242 pcs

For best performance select a battery with at least 4.0 Ah

- Battery capacity
- Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 25cm 1,1 40T 3/8	4501754	4 006825 607024
Spare bar 25cm 1,1	4501753	4 006825 607017

#### **CORDLESS CHAINSAW**

#### GE-LC 18/25-1 Li

PXC battery voltage	18 V			
Petrol equivalence class	up to 1.5 hp			
Battery charging time 18 V / 3.0 Ah	60 min			
Bar length	250 mm			
Cutting length	230 mm			
Cutting speed	4.5 m/s			
Oil tank capacity	200 ml			
Product weight	2.9 kg			
Protective cover	•			
Incl. 1 battery (18 V 3.0 Ah Li-Ion) and 1 charger	Article number 4501760	4 006825 608335		
Without battery / charger	Article number 4501761	4 006825 608342		

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	50 pcs	70 pcs	85 pcs	100 pcs	130 pcs	180 pcs	200 pcs	260 pcs

For best performance select a battery with at least 2.5 Ah

- 1) Battery capacity
- <sup>2)</sup> Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 25cm 1,1 40T 3/8	4501754	4 006825 607024
Spare bar 25cm 1,1	4501753	4 006825 607017







- Brushless motor

- >> Metal gear box
  >> Toolless guide bar and chain change
  >> High-quality guide bar and chain set
  >> Hand guard and folding chain cover
  >> Storage surface for use with both hands
- >> Soft grip

#### **CORDLESS PRUNING CHAINSAW**

#### **GE-PS 18/15 Li Brushless**

PXC battery voltage	18 V	
Bar length	158 mm	
Cutting length	125 mm	
Cutting speed	4.8 m/s	
Product weight	1.1 kg	
Protective cover	•	
Measuring help for oiling the chain	•	
Hexagon key for retensioning the chain	•	
Article only available without battery / charger	Article number 4600040	4 006825 671612

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	95 pcs	127 pcs	158 pcs	190 pcs	254 pcs	329 pcs	380 pcs	506 pcs

<sup>1)</sup> Battery capacity


<sup>&</sup>lt;sup>2)</sup> Max. cuts per battery charge through soft roundwood (ø 50 mm)

Spare chain 15cm 1,0 28T 7,62	4500174	4 006825 673647
Spare bar 15cm 1,0	4500163	4 006825 672503



#### **Chainsaw Trestle**

Article number	4500067
Product weight	7.1 kg
For tree trunks up to a diameter of	approx. 30 cm
Maximum load capacity	150 kg
Profile thickness	1.9 mm



#### **Chainsaw Trestle 2.5**

Profile thickness	2.5 mm
Maximum load capacity	200 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	8.9 kg
Article number	4500690
EAN	4 006825 678826



#### **Forest Safety Helmet**

Head circumference	52-66 cm
Product weight	0.7 kg
Article number	4500480
EAN	4 006825 544565



Depth stopScale for precise setting of the grinding angle LED light

>> Clamping device



#### **CORDLESS CHAIN SHARPENER**

#### GE-CS 18 Li

PXC battery voltage	18 V	
Grinding wheel diameter (inside)	23 mm	
Grinding wheel diameter (outside)	108 mm	
Grinding wheel thickness	3.2 mm	
Product weight	1.7 kg	
Article only available without battery	Article number	4 006825 613858
/ charger	4499940	4 "006825"613858"

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	180 min	240 min	300 min	390 min	480 min	660 min	780 min	960 min

Display Battery capacity
Amax. operating time per battery charge in idle mode

Spare grinding wheel 3.2 mm	4500076	4 006825 548860
Spare grinding wheel 4.5 mm	4500071	4 006825 548853







# **CORDLESS PRUNING SAW**

# GE-GS 18/150 Li

PXC battery voltage	18 V	
Saw blade length	151 mm	
Cutting capacity with branch handle	80 mm	
Cutting capacity without branch handle	100 mm	
Product weight	1.1 kg	
Article only available without battery / charger	Article number 3408290	4 006825 666649

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	70 pcs	90 pcs	115 pcs	140 pcs	180 pcs	240 pcs	280 pcs	360 pcs

Battery capacity
 Max. cuts per battery charge through roundwood (ø 60 mm)

Saw blade set, 3-piece, wood/metal	49576105	4 009315 761053



# **CORDLESS PRUNING SHEARS**

# GE-LS 18 Li

PXC battery voltage	18 V	
Max. branch diameter	28 mm	
Product weight	0.8 kg	
Article only available without battery / charger	Article number 3408300	4 006825 652727

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	1070 pcs	1426 pcs	1783 pcs	2139 pcs	2852 pcs	3708 pcs	4278 pcs	5704 pcs

Battery capacity
 Max. cuts per battery charge through round dry beech wood (ø 15 mm)







- >> Multi-part pipe with bayonet mount
- >> Electronic speed control (LED)
- **≫** 3-in-1: leaf blower, workshop blower or barbecue lighting aid

# **CORDLESS UNIVERSAL BLOWER**

# GE-UB 18/250 Li E

PXC battery voltage	18 V			
Battery charging time 18 V / 4.0 Ah	75 min			
Max. running time	20-130 min			
Max. blow velocity	250 km/h			
Max. blowing air flow	120 m³/h			
Idle speed	4500 - 15000 min <sup>-1</sup>			
Product weight	1.1 kg (excl. battery)			
Incl. 1 battery (18 V 4.0 Ah Li-lon) and 1 charger	Article number 3433560	4 006825 679793		
Without battery / charger	Article number 3433542	4 006825 659405		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	7-48 min	10-65 min	12-80 min	14-96 min	20-130 min	24-166 min	28-192 min	40-260 min

For best performance select a battery with at least 2.5 Ah

- 1) Battery capacity
- <sup>2)</sup> Max. operating time per battery charge in idle mode dependent on the selected speed



# **CORDLESS LEAF BLOWER**

# GC-CL 18 Li E

PXC battery voltage	18 V	
Max. blow velocity	210 km/h	
Max. blowing air flow	105 m³/h	
Idle speed	1400 - 12000 min	1-1
Product weight	1.3 kg	
Article only available without battery / charger	Article number 3433532	4 006825 610246

<b>1111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	10-180	14-240	16-300	20-390	26-480	40-660	42-720	52-960
	min							

- <sup>2)</sup> Max. operating time per battery charge in idle mode dependent on the selected speed

# Toolless change-over between suction and blowing function

>>> Brushless motor

Electronic speed controlAdditional handle >> Guiding wheels





# **CORDLESS LEAF VACUUM**

# **VENTURRO 18/210**

Article only available without battery / charger	Article number 3433625 4 006825 663631
Product weight	3.0 kg
Debris bag volume	45 l
Shredding function	10:1
Idle speed	8000 - 14000 min <sup>-1</sup>
Max. suction power	500 m³/h
Max. blow velocity	210 km/h
PXC battery voltage	18 V

	) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
***	2)	0-12 min	0-14 min	5-18 min	7-20 min	9-30 min	11-42 min	15-45 min	18-60 min
***	3)	3-10 min	4-15 min	5-19 min	7-22 min	9-32 min	13-40 min	14-48 min	18-64 min

For best performance select a battery with at least 3.0 Ah

- Battery capacity
- Max. operating time per battery charge in idle mode (vacuuming mode) dependent on the selected
- speed

  Max. operating time per battery charge in idle mode (blowing mode) dependent on the selected





# >> Toolless change-over between suction and blowing function

Electronic speed controlAdditional handle (adjustable)

>> Guiding wheels >> Debris bag with window

Brushless motor

Carrying strap

>> Soft grip



# **CORDLESS LEAF VACUUM**

# **GE-CL 36 Li E Brushless**

PXC battery voltage	2x 18 V			
Max. blow velocity	210 km/h			
Max. suction power	720 m³/h			
Idle speed	8000 - 13000 mir	1 <sup>-1</sup>		
Shredding function	10:1			
Debris bag volume	45 l			
Product weight	3.4 kg			
Article only available without batteries / chargers	Article number 3433600	4 006825 613391		

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>3333</b> <sup>2)</sup>	9-20 min	10-30 min	13-35 min	17-45 min	22-65 min	27-90 min	30-100 min	44-130 min
3)	10-30 min	13-35 min	16-40 min	21-60 min	27-75 min	32-105 min	39-120 min	54-150 min

For best performance select batteries with at least 2.5 Ah

- 1) Battery capacity (2x batteries required)
- Max. operating time per battery charge in idle mode (vacuuming mode) dependent on the selected
  - speed
    Max. operating time per battery charge in idle mode (blowing mode) dependent on the selected



# GE-CL 36/230 Li E

PXC battery voltage	2x 18 V				
Max. blow velocity	230 km/h				
Max. suction power	700 m³/h				
Idle speed	8000 - 14000 min <sup>-1</sup>				
Shredding function	10:1				
Debris bag volume	45 l				
Product weight	3.1 kg (blow) / 4.4	4 kg (vacuum)			
Article only available without batteries / chargers	Article number 3433630	4 006825 646511			

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>>> <sup>2)</sup>	10-22 min	12-28 min	14-34 min	20-45 min	24-55 min	30-75 min	35-85 min	48-110 min
3)	4 min	5 min	7 min	11 min	13 min	17 min	20 min	26 min
***************************************	11-24 min	13-29 min	16-35 min	24-50 min	27-58 min	37-79 min	43-91 min	54-116 min
<b>3333</b> 5)	6 min	7 min	8 min	13 min	15 min	20 min	23 min	30 min

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries required)
- Battery capacity (zx batteries required)
   Max. operating time per battery charge in idle mode (vacuuming mode) dependent on the selected speed
   Max. operating time per battery charge in idle mode (TURBO vacuuming mode)
   Max. operating time per battery charge in idle mode (blowing mode) dependent on the selected speed
   Max. operating time per battery charge in idle mode (TURBO blowing mode)



# >> Foldable cover to protect the batteries

- > Motor protection switch
- 3 reversible blades made of special steel
- Fold-down hopper with safety lock
- >> Generous funnel opening
- >> Transport wheels

Carrying strap >> Soft grip

>>> Transport handle



# **CORDLESS KNIFE SHREDDER**

# **REDAXXO 36/25**

PXC battery voltage	2x 18 V	
Idle speed	3000 min <sup>-1</sup>	
Max. branch diameter	25 mm	
Debris bag volume	55 I	
Product weight	10.5 kg	
Prodder incl.	•	
Garden rubbish bag	•	
Article only available without batteries / chargers	Article number 3430710	4 006825 671384

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	15 min	20 min	25 min	30 min	40 min	52 min	60 min	80 min

For best performance select batteries with at least 5.2 Ah

- 1) Battery capacity (2x batteries required)
- <sup>2)</sup> Max. operating time per battery charge in idle mode

Spare blade	3405931	4 006825 672916
-------------	---------	-----------------







# **CORDLESS GRASS AND SHRUB SHEARS**

# **GE-CG 18/100 Li T**

PXC battery voltage	18 V			
Cutting width with grass shear blade	100 mm			
Cutting length with shrub cutting blade	200 mm			
Spacing between teeth of shrub cutting blade	8 mm			
Product weight	1.9 kg (excl. battery)			
Incl. 1 battery (18 V 2.5 Ah Li-lon) and 1 charger	Article number 3410316	4 006825 680829		
Without battery / charger	Article number 3410310	4 006825 652109		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> 2)	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

<sup>1)</sup> Battery capacity

# **CORDLESS GRASS AND SHRUB SHEARS**

# GE-CG 18/100 Li

PXC battery voltage	18 V				
Cutting width with grass shear blade	100 mm				
Cutting length with shrub cutting blade	200 mm				
Spacing between teeth of shrub cutting blade	8 mm				
Product weight	0.7 kg				
Article only available without battery / charger	Article number 3410313	4 006825 652710			

<b>IIII)</b> 1	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> <sup>2)</sup>	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

# **CORDLESS GRASS AND SHRUB SHEARS**

# GC-CG 18 Li

PXC battery voltage	18 V	
Cutting width with grass shear blade	100 mm	
Cutting length with shrub cutting blade	200 mm	
Spacing between teeth of shrub cutting blade	8 mm	
Product weight	0.7 kg	
Article only available without battery / charger	Article number 3410370	4 006825 614213

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

<sup>1)</sup> Battery capacity

# Blade change without toolsLaser-cut blades

Blade change without toolsLaser-cut blades

> Metal gear box >> Soft grip

- Metal gear boxSoft grip



# **CORDLESS GRASS AND SHRUB SHEARS**

# GC-CG 18/1 Li

PXC battery voltage	18 V	
Cutting width with grass shear blade	100 mm	
Product weight	0.7 kg	
Article only available without battery	Article number	4 006825 654875
/ charger	3410382	4 1006825 654875

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	180 min	240 min	300 min	360 min	480 min	650 min	720 min	960 min

Max. operating time per battery charge in idle mode


Battery capacity
 Max. operating time per battery charge in idle mode

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode

Battery capacity
 Max. operating time per battery charge in idle mode







- Transparent tank with scale for checking the level
- >> Individually adjustable brass nozzle
- Battery cover provides protection against water ingress
   Spray lance with lockable operating button
- >> Padded carrying strap
- >> Large filler opening



# **CORDLESS PRESSURE SPRAYER**

#### GE-WS 18/150 Li

PXC battery voltage	18 V	
Filling capacity of the tank	15 l	
Max. spraying pressure	4.5 bar	
Pressure hose length	1400 mm	
Max. liquid temperature	40°C	
Product weight	4.7 kg	
Article only available without battery / charger	Article number 3425230	4 006825 651362

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	2 h	2.5 h	3.5 h	4 h	5 h	7 h	8.5 h	10 h

Battery capacity

# **CORDLESS PRESSURE SPRAYER**

# **GE-WS 18/75 Li**


PXC battery voltage	18 V	
Filling capacity of the tank	7.5 l	
Max. spraying pressure	2.5 bar	
Pressure hose length	1400 mm	
Max. liquid temperature	40°C	
Product weight	2.4 kg	
Article only available without battery / charger	Article number 3425220	4 006825 646368

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	5 h	6 h	7.5 h	10 h	12 h	16 h	20 h	24 h

Battery capacity

# >> Automatic pump, no manual pressure build-up required Transparent tank with scale for

- checking the level
- >> Individually adjustable brass nozzle >> Telescopic lance made of stainless steel
- >>> Battery cover provides protection against water ingress
- **>>** Spray lance with lockable operating button
- Large clips on the tank easy opening and closing
- >> Padded carrying strap



- Transparent tank with scale for checking the level
- >> Individually adjustable brass nozzle
- >> Telescopic lance made of stainless steel
- **≫** Battery cover provides protection against water ingress
- Spray lance with lockable operating button
- ➤ Large clips on the tank easy opening and closing
- >> Padded carrying strap

# **CORDLESS PRESSURE SPRAYER**

# GE-WS 18/35 Li

PXC battery voltage	18 V	
Filling capacity of the tank	3.5	
Max. spraying pressure	2.5 bar	
Pressure hose length	1400 mm	
Max. liquid temperature	40°C	
Product weight	2.2 kg	
Article only available without battery / charger	Article number 3425210	4 006825 645774

I	1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
	<b>333</b> 2)	5 h	6 h	7.5 h	10 h	12 h	16 h	20 h	24 h

<sup>1)</sup> Battery capacity



# **Pressure Sprayer Accessory Kit**

	_
Telescopic spray lance	1 - 2 m
Product weight	0.25 kg
Article number	3425205
EAN	4 006825 664003



# Tank 7.5 litres

Talik 7.5 lities	
Filling capacity of the tank	7.5
Product weight	0.8 kg
Article number	3425206
EAN	4 006825 664065

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge in idle mode



- >> Automatic pump, no manual
- pressure build-up required Transparent tank with scale for checking the level
- >> Individually adjustable brass nozzle
- > Large clips on the tank easy opening and closing

Locking switchSuitable for deflationTwo valve adapters

**>>** LED



# **CORDLESS PRESSURE SPRAYER**

# **GE-WS 18/10 Li**

PXC battery voltage	18 V	
Filling capacity of the tank	1.0	
Max. spraying pressure	1.3 bar	
Max. liquid temperature	40°C	
Product weight	0.6 kg	
Article only available without battery / charger	Article number 3425240	4 006825 669909

<b>1111</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	12 h	16 h	20 h	24 h	32 h	42 h	48 h	64 h



# **CORDLESS AIR PUMP**

# CE-AP 18 Li

PXC battery voltage	18 V		
Air rate	670 l/min		
max. pressure	0.05 bar		
Product weight	0.4 kg (excl. battery)		
Article only available without battery	Article number	4 006825 658996	
/ charger	2070110	4 "006825"658996"	

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	49 min	65 min	81 min	98 min	130 min	169 min	195 min	260 min

# **NEW**



# **CORDLESS OUTDOOR LIGHT**

# GC-OL 18/1500 Li

PXC battery voltage	18 V		
Luminosity	309 / 825 / 1500 lm		
Colour temperature	7000 K		
Number of LEDs	36		
Product weight	0.5 kg		
Article only available without battery / charger	Article number 2320120	4 006825 680423	

1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	2.4 h	3.2 h	4 h	4.8 h	6.4 h	8.3 h	9.6 h	12.8 h
3)	7.2 h	9.6 h	12 h	14.4 h	19.2 h	25 h	28.8 h	38.4 h

>> Carry handle >> Fastening clamp

Battery capacityMax. operating time per battery charge in idle mode

<sup>1)</sup> Battery capacity
2) Max. operating time per battery charge in idle mode

Battery capacity
 Luminous period per battery charge at max. brightness setting
 Luminous period per battery charge at min. brightness setting





# **NEW**

- >> Fan head rotation angle: +/- 60°

- Telescopic standTimer 1-8 hTiltable fan head



# **CORDLESS FAN**

# GE-CF 18/320 P Li

PXC battery voltage	18 V		
Idle speed	330 / 460 / 760 /910 min <sup>-1</sup>		
Wind speed	15000 m/h		
Fan diameter	320 mm		
Product weight	3.4 kg		
Article only available without battery	Article number	4 006825 679298	
/ charger	3408071	4   006825  679298	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	14,0 h	15.8 h	22.4 h	27.2 h	36.6 h	43.6 h	54.3 h	73.0 h
3)	4.4 h	5.4 h	7.0 h	8.3 h	11.0 h	13.7 h	16.5 h	22.0 h

- Battery capacity
   Max. operating time per battery charge at min. speed
   Max. operating time per battery charge at max. speed

# Fan head rotation angle: 0°-360° Carry handle Several fastening options



# **CORDLESS FAN**

# **GE-CF 18/2200 Li**

PXC battery voltage	18 V		
Idle speed	1200 / 1700 / 2200 min <sup>-1</sup>		
Wind speed	15000 m/h		
Fan diameter	180 mm		
Product weight	1.2 kg		
Article only available without battery / charger	Article number 3408035	4 006825 665253	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	5.3 h	7 h	8.8 h	10.6 h	14 h	18.3 h	21.2 h	28 h
3)	2 h	2.6 h	3.3 h	4 h	5.3 h	7 h	8 h	10.6 h

- Battery capacity
   Max. operating time per battery charge at min. speed
   Max. operating time per battery charge at max. speed

# **NEW**

- >> Fan head can be rotated (290°) and tilted (300°)
- Carry handleFastening clamp



# **CORDLESS FAN**

# GC-CF 18/110 Li

PXC battery voltage	18 V			
Idle speed	1700 / 2500 / 3400 min <sup>-1</sup>			
Wind speed	15000 m/h			
Fan diameter	110 mm			
Product weight	0.5 kg			
Article only available without battery	Article number	4 006825 677645		
/ charger	3408061	4   006825  677645		

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	19.5 h	26 h	32 h	38.5 h	51 h	67 h	77 h	102 h
3)	4 h	5.3 h	6.6 h	8 h	11 h	14 h	16 h	21.2 h

- Battery capacity
   Max. operating time per battery charge at min. speed
   Max. operating time per battery charge at max. speed





- Padded carrying strap
  Large buckle for easy opening and closing
  Cable hook
  Second battery pocket removable



# **BATTERY BELT**

# **GE-PB 36/18 Li**

PXC battery voltage	Suitable for 18 V appliances and 36 V (2x 18 V) appliances		
Number of battery pockets	2 pcs		
Cable length	150 cm		
Length of hip belt	150 cm		
Product weight	1.7 kg		
Article only available without batteries / chargers	Article number 3408310	4 006825 659580	



- Housing made of stainless steel
   Heating jacket made of galvanized steel sheet
   Piezo ignition
   On/Off switch for fan
   Backfire guard + piezo-electric flame guard
   Solenoid valve + gas valve button
   Only for use in Germany and Austria

# **GAS HOT AIR GENERATOR WITH RECHARGEABLE BATTERY**

# GE-HG 18/370 Niro Li

GE-IIG 10/3/0 MIIO EI				
PXC battery voltage	18 V			
Heating output	37 kW			
Hot air flow	1000 m³/h			
Max. gas consumption	2693 g/h			
Max. operating pressure	1.5 bar			
Gas bottle	5 kg - 11 kg propane-butane			
Gas type	Propane, butane or propane-bu- tane-mixtures			
Product weight	4.7 kg			
Accessories	Pressure regulator 1500 mbar + gas hose			
Article only available without battery / charger	Article number 2330805	4 006825 641851		

	1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
I	2)	90 min	140 min	160 min	180 min	280 min	330 min	380 min	560 min

Battery capacityMax. operating time per battery charge







- >> Wall mount incl. dowels and screws
- > Garden hose (30 m)
- Garden sprayer (cone and fan jet)
   Carrying handle and recessed grips
- >> Drip stop
- >> Patented hose guide system
- >> Stepless hose extraction
- Cleaning brushes on the feeder
   Maintenance flap
   Residual water drain

# **CORDLESS HOSE REEL (WATER)**

#### GE-HR 18/30-1 Li

PXC battery voltage	18 V	
Garden hose length	30 m	
Garden hose diameter	12.5 mm (1/2")	
Connecting hose length	1.5 m	
Connecting hose diameter	12.5 mm (1/2")	
Swivelling range	180°	
Product weight	12.1 kg	
Article only available without battery / charger	Article number 4173773	4 006825 682786

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>3333</b> <sup>2</sup>	25x	33x	42x	50x	66x	86x	100x	132x
<b>3333</b> 3	17x	22x	28x	34x	44x	57x	68x	88x

- <sup>1)</sup> Battery capacity
  <sup>2)</sup> Max. number of roll-on and roll-off cycles per battery charge with water-filled hose (30 m, 1/2")
- Max. number of roll-on and roll-off cycles per battery charge with empty hose (30 m, 1/2")



- Wall mount incl. dowels and screwsCarrying handle and recessed grips
- >> Drip stop
- >> Patented hose guide system
- >> Stepless hose extraction
- Cleaning brushes on the feeder
   Maintenance flap
- >> Residual water drain

# **CORDLESS HOSE REEL (WATER)**

# GE-HR 18/30-1 WH Li

PXC battery voltage	18 V			
Garden hose length	[30 m]*			
Garden hose diameter	[12.5 mm (1/2")]*	f		
Connecting hose length	1.5 m			
Connecting hose diameter	12.5 mm (1/2")			
Swivelling range	180°			
Product weight	8.5 kg			
Article only available without battery	Article number	4 006825 682793		
/ charger	4173774	4   006825  682793		

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	25x	33x	42x	50x	66x	86x	100x	132x
3)	17x	22x	28x	34x	44x	57x	68x	88x

- Max. number of roll-on and roll-off cycles per battery charge with water-filled hose (30 m, 1/2")
   Max. number of roll-on and roll-off cycles per battery charge with empty hose (30 m, 1/2")



# **Hose and Transport Trolley**

Max. load	50 kg
Support surface	28 x 34 cm
Wheel diameter	170 mm
Garden waste bag volume	75 I
Product weight	4.8 kg
Article number	4173772
EAN	4 006825 674231

<sup>\*</sup> Garden hose not included in scope of delivery







- >> Water filler screw
- Water drain screw
   Power level switch: ECO and BOOST mode
- >> Battery capacity indicator LED
- >>> Pre-filter
- >> Non-return valve
- Water filling / dirt indicatorSuction indicator
- >> Automatic mode
- >> Dry running protection

# **CORDLESS AUTOMATIC GARDEN PUMP**

# **AQUINNA 36/38 F LED AUTOMATIC**

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3800 l/h / 37 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	4.8 kg	
Article only available without batter-	Article number	4 006825 668391
ies / chargers	4180420	4 006825 668391

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
<b>3)</b>	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

- Battery capacity (2x batteries required)
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge



# >> Water filler screw

- >> Water drain screw
- >> Power level switch: ECO and BOOST mode
- >> Battery capacity indicator LED
- >>> Pre-filter
- Non-return valveWater filling / dirt indicator
- >> Suction indicator
- >> Automatic mode
- Dry running protection

# **CORDLESS AUTOMATIC GARDEN PUMP**

# **AQUINNA 18/30 F LED AUTOMATIC**

Article only available without battery / charger	Article number 4180460	4 006825 681512
Product weight	4.3 kg	
Pressure connection	33.3 mm (1") IT	
Suction connection	33.3 mm (1") ET	
Max. suction height	6 m	
Max. delivery capacity / height	3000 l/h / 28 m	
PXC battery voltage	18 V (+ 18 V)	

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	10 min	15 min	17 min	20 min	30 min	36 min	40 min	60 min
<b>3)</b>	14 min	19 min	23 min	28 min	38 min	48 min	56 min	76 min
<b>3333</b> <sup>4)</sup>	20 min	30 min	34 min	40 min	60 min	72 min	80 min	120 min
<b>3333</b> 5)	28 min	38 min	46 min	56 min	76 min	96 min	112 min	152 min

- 1) Battery capacity
  2) Max. operating time in BOOST mode with 1x 18 V battery per battery charge
  3) Max. operating time in ECO mode with 1x 18 V battery per battery charge
  4) Max. operating time in BOOST mode with 2x 18 V batteries per battery charge
  5) Max. operating time in ECO mode with 2x 18 V batteries per battery charge







- >> Water filler screw
- >> Water drain screw
- Water draft Screw
   Power level switch: ECO and BOOST mode
   Battery capacity indicator LED
   Pre-filter
   Non-return valve
   Water filling / dirt indicator

# **CORDLESS GARDEN PUMP**

# **AQUINNA 36/38 F LED**

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3800 l/h / 37 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	4.3 kg	
Article only available without batter-	Article number	4 006825 668384
ies / chargers	4180410	4 "006825"668384"

<b>1111</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
3)	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

- Battery capacity (2x batteries required)
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge



- >> Water filler screw
- Water filer screw
  Water drain screw
  Power level switch: ECO and BOOST mode
  Water filling indicator

# **CORDLESS GARDEN PUMP**

# **AOUINNA 36/34**

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3400 l/h / 37 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	3.8 kg	
Article only available without batteries / chargers	Article number 4180450	4 006825 673975

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	12 min	16 min	20 min	24 min	32 min	42 min	48 min	64 min
<b>3</b> )	24 min	32 min	40 min	48 min	64 min	84 min	96 min	128 min

- Battery capacity (2x batteries required)
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge







- Water filler screwWater drain screwPower level switch: ECO and BOOST mode

# **CORDLESS GARDEN PUMP**

# **AQUINNA 36/30**

PXC battery voltage	2x 18 V		
Max. delivery capacity / height	3000 l/h / 26 m		
Max. suction height	8 m		
Suction connection	42 mm (1¼") ET		
Pressure connection	33.3 mm (1") IT		
Product weight	3.3 kg		
Accessories	Adapter 33.3 mm (1") ET		
Article only available without batteries / chargers	Article number 4180400	4 006825 638981	

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	12 min	15 min	23 min	30 min	35 min	45 min	50 min	70 min
<b>3)</b>	30 min	35 min	47 min	55 min	70 min	85 min	100 min	140 min

- Battery capacity (2x batteries required)
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge



# **CORDLESS GARDEN PUMP**

# AQUINNA 36/30 Set

PXC battery voltage	2x 18 V	
Max. delivery capacity / height	3000 l/h / 26 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	3.3 kg	
Accessories	Suction hose (4 m	٦)
Article available without batteries / chargers, with suction hose (4 m)	Article number 4180401	4 006825 679762

1) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	12 min	15 min	23 min	30 min	35 min	45 min	50 min	70 min
<b>3</b> )	30 min	35 min	47 min	55 min	70 min	85 min	100 min	140 min

- Battery capacity (2x batteries required)
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge







- >> Water filler screw
- Water filer sciew
   Water drain screw
   Power level switch: ECO and BOOST mode
   Battery capacity indicator LED
- >>> Pre-filter
- >> Non-return valve
- >> Water filling / dirt indicator



- >> Water filler screw
- >> Water drain screw
- >> Power level switch: ECO and BOOST mode

# **CORDLESS GARDEN PUMP**

# **AQUINNA 18/30 F LED**

•		
PXC battery voltage	18 V (+ 18 V)	
Max. delivery capacity / height	3000 l/h / 28 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	3.9 kg	
Article only available without battery	Article number	4 006825 668513
/ charger	4180430	4 "006825"668513"

<b>()</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	10 min	15 min	17 min	20 min	30 min	36 min	40 min	60 min
3)	14 min	19 min	23 min	28 min	38 min	48 min	56 min	76 min
***************************************	20 min	30 min	34 min	40 min	60 min	72 min	80 min	120 min
<b>5</b> )	28 min	38 min	46 min	56 min	76 min	96 min	112 min	152 min

- 1) Battery capacity

- Max. operating time in BOOST mode with 1x 18 V battery per battery charge
   Max. operating time in ECO mode with 1x 18 V battery per battery charge
   Max. operating time in BOOST mode with 2x 18 V batteries per battery charge
   Max. operating time in ECO mode with 2x 18 V batteries per battery charge

# **CORDLESS GARDEN PUMP**

# **AQUINNA 18/28**

PXC battery voltage	18 V	
Max. delivery capacity / height	2800 l/h / 25 m	
Max. suction height	6 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") IT	
Product weight	2.4 kg	
Article only available without battery / charger	Article number 4180440	4 006825 668711

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	10 min	14 min	17 min	20 min	28 min	36 min	40 min	56 min
<b>3)</b>	14 min	18 min	22 min	27 min	36 min	47 min	54 min	72 min

- Battery capacity
   Max. operating time in BOOST mode per battery charge
   Max. operating time in ECO mode per battery charge

# **Surface Pumps Accessories**

Suction Hose (7 m) with Brass Connectors	Article number 4173640	4 006825 549171
Suction Hose (4 m) with Brass Connectors	Article number 4173630	4 006825 549133
Suction Hose (7 m) with Plastic Connectors	Article number 4173645	4 006825 549102
Suction Hose (4 m) with Plastic Connectors	Article number 4173635	4 006825 549058
Coarse Filter 25 cm	Article number 4173851	4 006825 549195
Coarse Filter 12 cm	Article number 4173801	4 006825 549188
Adapter 33.3 mm (1") ET	Article number 4173761	4 006825 662733





- >> Mobile battery box
- >> Integrated cable rewind
- Integrated wall mount
- Suspension device made from stainless steel Telescopic extension tube
- Suspension device r
  Telescopic extension
  Flexible gooseneck

# **CORDLESS SUBMERSIBLE PRESSURE PUMP**

# GE-PP 18 RB Li

PXC battery voltage	18 V	
Max. delivery capacity / height	3000 l/h / 20 m	
Max. immersion depth	4 m	
Hose connection	33.3 mm (1") ET	
Connection cable	5 m	
Product weight excl. / incl. accessories	2.5 / 2.8 kg	
Article only available without battery / charger	Article number 4170429	4 006825 651270

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	12 min	15 min	20 min	25 min	30 min	35 min	45 min	60 min

<sup>1)</sup> Battery capacity



- Mobile battery boxDry running protectionIntegrated cable rewind
- Integrated wall mount
   Suspension device made from stainless steel
   Low Level function: down to 1 mm

# **CORDLESS CLEAR WATER PUMP**

# GE-SP 18 LL Li

PXC battery voltage	18 V	
Max. delivery capacity / height	4500 l/h / 8 m	
Max. immersion depth	4 m	
Suction down to	1 mm	
Hose connection	33.3 mm (1") ET	
Connection cable	5 m	
Product weight	2.2 kg	
Article only available without battery / charger	Article number 4181560	4 006825 661415

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;&gt;</b> 2)	20 min	25 min	30 min	40 min	60 min	70 min	80 min	120 min

<sup>1)</sup> Battery capacity

<sup>2)</sup> Max. operating time per battery charge when pumping water

Pool Cover Pump Plate	4181563	4 006825 682038
-----------------------	---------	-----------------



- >> Mobile battery box

- Mobile battery box
   Dry running protection
   Integrated cable rewind
   Integrated wall mount
   Suspension device made from stainless steel

# **CORDLESS CLEAR WATER PUMP**

# GE-SP 18 Li

PXC battery voltage	18 V
Max. delivery capacity / height	5000 l/h / 8 m
Max. immersion depth	4 m
Suction down to	15 mm
Hose connection	33.3 mm (1") ET
Connection cable	5 m
Product weight	2.6 kg
Article only available without battery	Article number 4181500 4 006825 651379
/ charger	4181500 4 006825 651379

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	20 min	30 min	35 min	40 min	60 min	70 min	80 min	120 min

<sup>1)</sup> Battery capacity

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge when pumping water

<sup>&</sup>lt;sup>2)</sup> Max. operating time per battery charge when pumping water







- Mobile battery box
   Dry running protection
   Integrated cable rewind
   Integrated wall mount
   Suspension device made from stainless steel
   Power level switch: ECO and BOOST mode



- Mobile battery box
  Dry running protection
  Integrated cable rewind
  Integrated wall mount
- >> Suspension device made from stainless steel
- Low Level function: down to 1 mm
- Power level switch: ECO and BOOST mode
   Suction level control

# **CORDLESS DIRTY WATER PUMP**

# **GE-DP 18/25 Li**

PXC battery voltage	18 V	
Max. delivery capacity / height	7500 l/h / 5 m	
Max. immersion depth	4 m	
Suction down to	35 mm	
Max. size of foreign particle	25 mm	
Hose connection	42 mm (1¼") ET	
Connection cable	5 m	
Product weight	3.3 kg	
Universal hose adapter	•	
Article only available without battery	Article number	4 006825 665642
/ charger	4181580	4 "006825"665642"

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>3333</b> <sup>2)</sup>	11 min	15 min	19 min	23 min	30 min	40 min	46 min	60 min
<b>3)</b>	16 min	21 min	26 min	32 min	42 min	55 min	64 min	84 min

<sup>1)</sup> Battery capacity

# **CORDLESS DIRTY WATER PUMP**

# **GE-DP 18/25 LL Li**

PXC battery voltage	18 V
Max. delivery capacity / height	7000 l/h / 5 m
Max. immersion depth	4 m
Suction down to	1 mm
Max. size of foreign particle	25 mm
Hose connection	42 mm (1¼") ET
Connection cable	5 m
Product weight	3.4 kg
Universal hose adapter	•
Article only available without battery / charger	Article number 4181590 4 006825 668780

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	11 min	15 min	19 min	23 min	30 min	40 min	46 min	60 min
<b>3)</b>	16 min	21 min	26 min	32 min	42 min	55 min	64 min	84 min

Max. operating time per battery charge when pumping water in BOOST mode
 Max. operating time per battery charge when pumping water in ECO mode

Battery capacity
 Max. operating time per battery charge when pumping water in BOOST mode
 Max. operating time per battery charge when pumping water in ECO mode





Locking System for connecting stacked cases2x fold-in ergonomic handles for comfortable carrying

# **Set of Plastic Compartments**

E-Case S-F
2x long, 3x medium, 4x short dividers
4540012
4 006825 654004
٠

E-Case S-F

**SYSTEM CASES E-CASE** 

Items supplied	1x System Case + 1x Foam Insert for devices
Internal dimensions	415 x 280 x 95 mm
External dimensions	444 x 330 x 131 mm
Load capacity	90 kg
Product weight	1.7 kg
Article number	4540011 4 006825 653991



# **Grid Foam**

Suitable for	E-Case S-F
Items supplied	1x adjustable grid foam inlay
Article number	4540013
EAN	4 006825 656749





- Locking System for connecting stacked cases
   Inner height of 25 cm is optimized for bulky einhell products
   Foldable + ergonomic handle for comfortable carrying

# **SYSTEM CASES E-CASE**

# E-Case M

December 19 of	4 56	In a self and Discount
Items supplied	1x E-Case M + 1x hand tool insert	
Internal dimensions	415 x 280 x 250 mm	
External dimensions	444 x 330 x 295 mm	
Load capacity	90 kg	
Product weight	2.9 kg	
Article number	4540021	4 006825 667721





# **SYSTEM CASES E-CASE**

# **E-Case Tower**

Items supplied	1x E-Case S + 1x foam insert for devices, 1x E-Case S + 1x set of plastic compartments, 1x E-Case L + 1x hand tool insert + 2x spacer clips	
Internal dimensions	415 x 280 x 95 mm (E-Case S), 415 x 273 x 320 mm (E-Case L)	
External dimensions (incl. telescopic handle)	444 x 368 x 700 mm	
Load capacity	120 kg	
Product weight	10.1 kg	
Plastic compartments	2x long, 3x medium, 4x short dividers	
Article number	4540015	4 006825 660609

>> Complete modular storage solution for the ambitious handyman





- Locking System for connecting stacked cases
   Large 15 cm all-terrain rubberized wheels
   For storing and transporting large tools

# **SYSTEM CASES E-CASE**

# E-Case L

Itaana arrandia d	1x E-Case L + 1x hand tool insert + 2x	
Items supplied	spacer clips	
Later and discounting	445 272 220	
Internal dimensions	415 x 273 x 320 r	nm
External dimensions (incl. telescopic handle)	444 x 406 x 355 mm	
Load capacity	120 kg	
Product weight	6.3 kg	
Article number	4540014	4 006825 660562



- Locking System for connecting stacked cases
   Ergonomic side handles for carrying comfort
   On-top stacking possible

# **SYSTEM CASES E-CASE**

# **E-Case Toolbox**

Items supplied	1x E-Case Toolbox	
External dimensions	444 x 320 x 210 mm	
Internal dimensions	403 x 290 x 195 r	mm
Load capacity	90 kg	
Product weight	1.7 kg	
Article number	4540037	4 006825 677973



- Part of the modular E-Case system from Einhell
   Large outside pockets for storing, e.g. batteries and chargers
   Spirit level clips

# **SYSTEM CASES E-CASE**

# **E-Case Bag**

Items supplied	1x E-Case Bag	
External dimensions	440 x 220 x 330 mm	
Internal dimensions	430 x 210 x 290 r	mm
Load capacity	30 kg	
Product weight	1.5 kg	
Article number	4540036	4 006825 677966



- >> Locking system for connecting the roller board and case

- Additional locking mechanism for half size e-cases
   Lashing strap fastening for transporting larger objects
   Large support surface adapted for transporting drinks crates
   Integrated foot brakes

# **SYSTEM CASES E-CASE**

# **E-Case Rolling Base**

Items supplied	1x E-Case Rolling Base	
Dimensions	403 x 290 mm	
Load capacity	120 kg	
Product weight	3.6 kg	
Article number	4540041	4 006825 679335

# **NEW**



- Locking System for connecting stacked cases
   Additional locking mechanism for half size e-cases
   Ergonomic carrying handle for transport
- >> 2 smaller and 1 larger drawer for flexible storage
- >> Lockable

# **SYSTEM CASES E-CASE**

# **E-Case Drawer**

Items supplied	1x E-Case with 3 drawers + 12x sorting boxes + set of plastic compartments	
External dimensions	444 x 322 x 340 mm	
Load capacity	60 kg	
Product weight	7.4 kg	
Plastic Compartments	•	
Sorting boxes	•	
Article number	4540047	4 006825 684797

# **NEW**



- Locking System for connecting stacked cases
   Connecting element between E-Case and Half Size Organiser
   Can also be used as a wall mount

# **SYSTEM CASES E-CASE**

# **E-Case Adapter Plate**

Items supplied	1x E-Case Adapte	er Plate
Total payload when mounted on the E-Case or floor	90 kg	
Total payload when mounted on the wall	25 kg	
Product weight	0.8 kg	
Article number	4540043	4 006825 683530

# **NEW**



- >> Part of the modular E-Case system from Einhell
- >> Additional half-size components can be stacked
- >> High-quality transparent lid
- >> Ergonomic carrying handle for transport

# **SYSTEM CASES E-CASE**

# **E-Case Half Size Organizer**

Items supplied	1x E-Case Half Size Organiser + 3x sorting boxes + 1x large box + 2x		
	dividers		
Dimensions	300 x 262 x 78 m	300 x 262 x 78 mm	
Load capacity	12.5 kg		
Product weight	1.0 kg		
Sorting boxes	•	•	
Article number	4540048	4 006825 684803	



# **NEW**



- >> Part of the modular E-Case system from Einhell
- Large area for working
   Storage compartments for screws, wall plugs, screwdrivers, etc.

# **SYSTEM CASES E-CASE**

# **E-Case Worktable**

Items supplied	1x E-Case Workta	able
Dimensions	500 x 360 x 42 m	m
Product weight	1.7 kg	
Article number	4540049	4 006825 685121

# **ACCESSORIES - CASES + BAGS**

# E-Box L70



Items supplied	1 universal case
Internal dimensions	670 x 190 x 300 mm
External dimensions	700 x 250 x 350 mm
Load capacity	50 kg
Product weight	4.1 kg
Article number	4530054
EAN	4 006825 636901

# Einhell Bag 56/29

Items supplied	1 universal bag
Internal dimensions	520 x 290 x 250 mm
External dimensions	520 x 290 x 300 mm
Load capacity	25 kg
Product weight	1.7 kg
Article number	4530078
EAN	4 006825 672527

# E-Box M55



Items supplied	1 universal case
1.1	540 007 404
Internal dimensions	510 x 327 x 124 mm
External dimensions	550 x 400 x 150 mm
Load capacity	30 kg
Product weight	3.0 kg
Article number	4530049
EAN	4 006825 631739



# Einhell Bag 45/29

Items supplied	1 universal bag
Internal dimensions	420 x 270 x 200 mm
External dimensions	450 x 290 x 220 mm
Load capacity	20 kg
Product weight	1.2 kg
Article number	4530074
EAN	4 006825 663310

# E-Box S35



Items supplied	1 universal case
Internal dimensions	310 x 250 x 89.5 mm
External dimensions	350 x 330 x 110 mm
Load capacity	12 kg
Product weight	1.6 kg
Article number	4530045
EAN	4 006825 629750



# Einhell Bag 45/22

Items supplied	1 universal bag
Internal dimensions	390 x 200 x 190 mm
External dimensions	450 x 220 x 350 mm
Load capacity	15 kg
Product weight	0.9 kg
Article number	4530037
EAN	4 006825 636345





# **ACCESSORIES - BATTERIES**

# 4.0 Ah SEALED Power X-Change Plus Battery



Items supplied	1 battery
PXC battery voltage	18 V / 4.0 Ah
Battery power	max. 900 W
Product weight	0.58 kg
Article number	4511627
EAN	4 006825 673227

# 3.0 Ah SEALED Power X-Change Plus Battery



5.0 / II. 52/ IEEE . 6 IV.C.	i it change i las Battery
Items supplied	1 battery
PXC battery voltage	18 V / 3.0 Ah
Battery power	max. 900 W
Product weight	0.57 kg
Article number	4511618
EAN	4 006825 672794

# SEALED

# **SEALED TECHNOLOGY.**NO CHANCE FOR DUST AND WATER.

Officially tested to IP57 protection class.\*

# **WHAT DOES IP57 MEAN?**

DUST 5

Protected from all types of foreign bodies and dust – be it wood, brick or metal.






# 7 WATER

Protected from high pressure water spray and temporary submersion – to a maximum depth of 1 m for up to 30 minutes.







In addition to the sealed housing there is a sensor controlled safety cut out to prevent short circuiting under water.

After the contacts have been dried, the battery is ready for use again.

<sup>\*</sup> Protection according to IP57 applies to the battery itself. It does not apply to tools operated with the battery.







# **PLUS TECHNOLOGY**

By switching to the new "21700" cell format (21 mm diameter, 70.0 mm length) our latest Power X-Change batteries have acquired the best combination of power/running time and weight.

Why? Using this cell technology it is possible to achieve the same power and running time with five cells instead of the previous ten.

Benefits? The new batteries are 12 % lighter and 13 % more compact than their predecessors – at 100 % power and running time.

Results: Light-weight all-rounders energy-intensive applications such as in cordless chainsaws.






# **MULTI-AH TECHNOLOGY**

Thanks to MULTI-Ah technology, switching over from a 5.0 Ah battery to a 8.0 Ah battery is really easy and can be done with just the push of a button.

The 5.0 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamps or cordless screwdrivers). The 8.0 Ah battery offers the maximum running time for more capacity-intensive applications (e.g. cordless lawn mower or cordless wet and dry vacuum cleaners).





# ONE BATTERY FOR ALL DEVICES – TWIN-PACK TECHNOLOGY

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, **two 18 V batteries are simply combined in one 36 V device** thanks to Twin-Pack technology. Doubling the voltage automatically doubles the power.

Double Twin-Pack technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.





# **ACCESSORIES - BATTERIES**

# One battery for all devices

Our rechargeable batteries are not only available individually (solo item), but also in a Twin Pack. To get started in the Einhell world, we recommend choosing a Starter Kit (battery + charger)

	Less weight and size		PXC Ba	PXC Batteries		More power and runtime	
						NEW	
	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	3.0 Ah PLUS	3.0 Ah SEALED	
Solo (1 battery)	Only available in Starter Kits	4511395	Only available in Starter Kits	Only available in Kits	4511501	4511618	
EAN	-	4 006825 610369	-	-	4 006825 644197	4 006825 672794	
Power	max. 450 W	max. 450 W	max. 720 W	max. 900 W	max. 900 W	max. 900 W	
Weight	400 g	400 g	460 g	650 g	585 g	595 g	
Features							
PLUS – Extra Power					<b>✓</b>	<b>✓</b>	
SEALED						<b>✓</b>	
Multi-Ah							

	Less weight	and size	e PXC Batteries		More power and runtime	
			NEW			
	4.0 Ah	4.0 Ah PLUS	4.0 Ah SEALED	5.2 Ah	4-6 Multi-Ah	5-8 Multi-Ah
Solo (1 battery)	4511396	4511553	4511627	4511437	4511502	4511600
EAN	4 006825 610376	4 006825 660869	4 006825 673227	4 006825 616606	4 006825 644210	4 006825 665055
Power	max. 900 W	max. 900 W	max. 900 W	max. 1260 W	max. 1350 W	max. 1350 W
Weight	670 g	595 g	605 g	890 g	1020 g	1050 g
Features						
PLUS – Extra Power		<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>
SEALED			<b>✓</b>			
Multi-Ah					<b>✓</b>	<b>✓</b>







# **ACCESSORIES - STARTER KITS**

# Getting started is easy - with the Einhell Power X-Change Starter Kit

Technical data and features at a glance:



# **ACCESSORIES - CHARGERS**

One charger for all batteries - 100% compatibility

	13/10		130		
	3 A Charger	3 A Carcharger	4 A Fastcharger	6 A Boostcharger	8 A Boostcharger
Article number	Only available in Starter Kits	4512113	4512103	Only available in Starter Kits	4512155
EAN	-	4 006825 655377	4 006825 650228	-	4 006825 670554
Charging current	3 A	3 A	4 A	6 A	8 A
Number of ports for PXC batteries	1	1	1	1	1

NEW

	3 A Twincharger	4 A Twincharger	4 A Quattrocharger
Article number	4512069	4512161	4512102
EAN	4 006825 629729		4 006825 649536
Charging current	3 A (per port)	4 A (per port)	4 A (per port) (parallel charging of 2x2 batteries)
Number of ports for PXC batteries	2	2	4







- Endless extendableTongue and groove connectionSnap-in function for secure fastening



>> Protects the battery against dust and moisture

# **PXC ACCESSORIES**

# **Battery Mounting Gadget**

Items supplied	2 battery mounting gadgets, 4 screws, 4 dowels		
Suitable for (batteries)	all 18 V Power X-Change batteries		
Special feature	The batteries latch in place and are secure in every position		
Article number	4514155	4 006825 658774	

# **PXC ACCESSORIES**

# **Battery Protector**

Items supplied	1 battery cover		
Suitable for (batteries)	all 18 V Power X-Change batteries		
Can be used for (devices)	HYPRESSO 18/24, TE-DA 18/760 Li, GE-WS 18/10 Li		
Special feature	Protects the battery against dust and moisture		
Article number	4140151	4 006825 670844	

# **BATTERY CHARGING TIME TABLE**

	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah	
Power X-Charger 3 A									Shorter charging
Power X-Twincharger 3 A (parallel charging of 2 batteries)	30 min	40 min	50 min	60 min	75 min	100 min	120 min	160 min	time
Power X-Car Charger 3 A									250
Power X-Fastcharger 4 A									-25%
Power X-Twincharger 4 A (parallel charging of 2 batteries)	24 min	30 min	37 min	45 min	60 min	80 min	90 min	120 min	$\checkmark$
2x2 Power X-Quattrocharger 4 A (parallel charging of 2 batteries)									
Power X-Boostcharger 6 A *	24 min	30 min	27 min	32 min	40 min	50 min	60 min	80 min	-50%
Power X-Boostcharger 8 A **	24 min	30 min	27 min	32 min	40 min	40 min	45 min	60 min	-60%

<sup>\*</sup> Only 2.5 Ah - 8.0 Ah batteries can be charged with 6 A. Batteries of lower capacity are charged with a lower current.
\*\* Only 5.2 Ah - 8.0 Ah batteries can be charged with 8 A. Batteries of lower capacity are charged with a lower current.











Official Home & Garden Expert





# **HAND LAWN MOWER**

# **GE-HM 38 S-F**

Cutting width	38 cm	
Cutting height adjustment	4 levels / 13 - 38 i	mm
Grass box capacity	26	
Number of mowing blades	5	
Mowing spindle diameter	125 mm	
Wheel diameter	220 mm	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²	
Product weight	8.4 kg	
Article number	3414161	4 006825 607765

Grass catch box	3421112	4 006825 609707
-----------------	---------	-----------------



# **HAND LAWN MOWER**

# **GE-HM 38 S**

Cutting width	38 cm	
Cutting height adjustment	4 levels / 13 - 38 i	mm
Number of mowing blades	5	
Mowing spindle diameter	125 mm	
Wheel diameter	220 mm	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²	
Product weight	7.8 kg	
Article number	3414165	4 006825 609714

Grass catch box	3421112	4 006825 609707
-----------------	---------	-----------------





# **HAND LAWN MOWER**

# GC-HM 400

GC-111VI 400		
Cutting width	40 cm	
Cutting height adjustment	4 levels / 13 - 37 i	mm
Grass box capacity	27 l	
Number of mowing blades	5	
Mowing spindle diameter	125 mm	
Wheel diameter	215 mm	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	250 m²	
Product weight	7.5 kg	
Article number	3414129	4 006825 651959



# **HAND LAWN MOWER**

# GC-HM 300

Cutting width	30 cm	
Cutting height adjustment	4 levels / 13 - 37	mm
Grass box capacity	16 l	
Number of mowing blades	5	
Mowing spindle diameter	125 mm	
Wheel diameter	215 mm	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	150 m²	
Product weight	6.5 kg	
Article number	3414114	4 006825 651942



# **ELECTRIC LAWN MOWER**

# GC-EM 1800/43

Mains connection / rated input	230 - 240 V ~ 50 I	Hz / 1800 W	
Cutting width	43 cm		
Cutting height adjustment	6 levels / 20 - 65 i	mm / central	
Grass box capacity	50 I		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m²		
Product weight	12.1 kg		
Article number	3400090	4 006825 670356	

Spare blade	3405445	4 006825 670455
-------------	---------	-----------------



# **ELECTRIC LAWN MOWER**

# GC-EM 1600/37

Mains connection / rated input	230 - 240 V ~ 50 I	Hz / 1600 W	
Cutting width	37 cm		
Cutting height adjustment	5 levels / 20 - 60 i	mm / central	
Grass box capacity	38 l		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²		
Product weight	10.7 kg		
Article number	3400080	4 006825 670363	

Spare blade	3405435	4 006825 670448
-------------	---------	-----------------



# **ELECTRIC LAWN MOWER**

# GC-EM 1000/32

Mains connection / rated input	220 - 240 V ~ 50 H	Hz / 1000 W
Cutting width	32 cm	
Cutting height adjustment	3 levels / 30 - 70 mm / axial	
Grass box capacity	30	
Wheel diameter front / rear	140 mm / 140 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m²	
Product weight	7.9 kg	
Article number	3400070	4 006825 670332

Spare blade	3405415	4 006825 670431
-------------	---------	-----------------





# **PETROL LAWN MOWER**

# GC-PM 56/2 S HW

Engine / displacement	4-stroke engine /	′ 173 cm³
Power / working speed	2.8 kW / 2850 min <sup>-1</sup>	
Cutting width	56 cm	
Cutting height adjustment	6 levels / 25 - 70	mm / central
Grass box capacity	80 I	
Wheel diameter front / rear	200 mm / 280 mm	
Housing material	Powder-coated sheet steel	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	2200 m²	
Product weight	38.3 kg	
Cleaning tool	•	
Article number	3404860	4 006825 646450

Spare blade	3405830	4 006825 630480
-------------	---------	-----------------



# **PETROL LAWN MOWER**

# **GC-PM 46 S HW-E**

Engine / displacement	4-stroke engine /	′ 149 cm³
Power / working speed	2.0 kW / 2900 mi	n <sup>-1</sup>
Cutting width	46 cm	
Cutting height adjustment	9 levels / 25 - 80	mm / central
Grass box capacity	65 l	
Wheel diameter front / rear	204 mm / 280 mm	
Housing material	Powder-coated sheet steel	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1400 m²	
Product weight	28.9 kg	
Article number	3407570	4 006825 663143

Combination blade	3405670	4 006825 605280



# **PETROL LAWN MOWER**

# GC-PM 51/3 S HW

Engine / displacement	4-stroke engine /	171 cm³
Power / working speed	2.7 kW / 2900 min <sup>-1</sup>	
Cutting width	51 cm	
Cutting height adjustment	6 levels / 30 - 80	mm / central
Grass box capacity	70 l	
Wheel diameter front / rear	204 mm / 280 mm	
Housing material	Powder-coated sheet steel	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1800 m²	
Product weight	28.3 kg	
Article number	3404333	4 006825 655261

Spare blade	3405660	4 006825 605273
Combination blade	3405650	4 006825 605266



# **PETROL LAWN MOWER**

# GC-PM 46/5 S

Engine / displacement	4-stroke engine / 132 cm <sup>3</sup>	
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>	
Cutting width	46 cm	
Cutting height adjustment	9 levels / 25 - 80 mm / central	
Grass box capacity	65 I	
Wheel diameter front / rear	178 mm / 204 mm	
Housing material	Powder-coated sheet steel	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1400 m²	
Product weight	26.0 kg	
Article number	3407550	4 006825 662047

Combination blade	3405670	4 006825 605280
-------------------	---------	-----------------



# **PETROL LAWN MOWER**

# GC-PM 40/2 S

GC-1 IVI 40/2 3		
Engine / displacement	4-stroke engine /	132 cm³
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>	
Cutting width	40 cm	
Cutting height adjustment	7 levels / 25 - 75 i	mm / central
Grass box capacity	45 l	
Wheel diameter front / rear	178 mm / 203 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1000 m²	
Product weight	19.9 kg	
Article number	3404823	4 006825 665260

Spare blade	3405850	4 006825 638806



# **PETROL LAWN MOWER**

# GC-PM 40/2

Engine / displacement	4-stroke engine / 132 cm <sup>3</sup>	
Power / working speed	2.0 kW / 2900 min <sup>-1</sup>	
Cutting width	40 cm	
Cutting height adjustment	3 levels / 25 - 60 mm / single	
Grass box capacity	45 l	
Wheel diameter front / rear	152 mm / 152 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m <sup>2</sup>	
Product weight	17.3 kg	
Article number	3404833	4 006825 665741

Spare blade	3405850	4 006825 638806
-------------	---------	-----------------



# Integrated carry handle Height-adjustable handlebar + parking position Folding handlebar Quick fasteners Wide wheels exert less stress on the lawn

# **ELECTRIC SCARIFIER/AERATOR**

# **GE-SA 1640**

,		
Mains connection / rated input	230 V ~ 50 Hz / 1600 W	
Working width	400 mm	
Working depth adjustment	4 levels (central) + transport position	
Number of blades (ball bearing)	20 pcs	
Number of aerating claws (ball bearing)	30 pcs	
Wheel diameter front / rear	220 mm / 175 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	800 m <sup>2</sup>	
Product weight	13.7 kg	
Catch bag	•	
Aerator roller and scarifier roller	•	
Article number	3420590 4 006825 595642	

Spare aerator roller	3421135	4 006825 606331
Spare scarifier roller	3421130	4 006825 606324

# **ELECTRIC SCARIFIER/AERATOR**

# GE-SA 1435/1

Mains connection / rated input	230 V ~ 50 Hz / 1400 W	
Working width	350 mm	
Working depth adjustment	3 levels (central) + parking position	
Number of blades (ball bearing)	16 pcs	
Number of aerating claws (ball bearing)	24 pcs	
Wheel diameter front / rear	160 mm / 160 mm	
Housing material	Easy maintenance plastic housing	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	550 m²	
Product weight	10.2 kg	
Catch bag	•	
Aerator roller and scarifier roller	•	
Article number	3420690	4 006825 661422

Catch bag	3405960	4 006825 667523
Aerator Roller	3405961	4 006825 667516
Scarifier Roller	3405962	4 006825 667509



# ELECTRIC SCARIFIER/AERATOR

# GC-SA 1231/1

Mains connection / rated input	230 V ~ 50 Hz / 1200 W
Working width	310 mm
Working depth adjustment	3 levels + parking position
Number of blades (ball bearing)	8 double-knives
Number of aerating claws (ball bearing)	45 pcs
Wheel diameter front / rear	180 mm / 100 mm
Housing material	Plastic
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m²
Product weight	8.5 kg
Catch bag	•
Aerator roller and scarifier roller	•
Article number	3420640 4 006825 628272

Catch bag	3405577	4 006825 629699
Aerator Roller	3405572	4 006825 629675
Scarifier Roller	3405582	4 006825 629682

<ul> <li>Integrated carry handle</li> <li>Height-adjustable handlebar</li> <li>Folding handlebar</li> <li>Wide wheels exert less stress on the lawn</li> </ul>



# **ELECTRIC SCARIFIER**

# GC-ES 1231/1

Mains connection / rated input	230 V ~ 50 Hz / 1200 W	
Working width	310 mm	
Working depth adjustment	3 levels + parking position	
Number of blades (ball bearing)	8 double-knives	
Wheel diameter front / rear	180 mm / 100 mm	
Housing material	Plastic	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	300 m <sup>2</sup>	
Product weight	8.0 kg	
Scarifier roller	•	
Article number	3420630	4 006825 628289

Catch bag	3405577	4 006825 629699
Aerator Roller	3405572	4 006825 629675
Scarifier Roller	3405582	4 006825 629682



# **PETROL SCARIFIER**

# GC-SC 4240 P

Engine / displacement	4-stroke engine / 212 cm³	
Power rating	4.2 kW	
Working width	400 mm	
Working depth adjustment	8 levels (central) + transport position	
Number of blades (ball bearing)	18 pcs	
Wheel diameter front / rear	180 mm / 180 mm	
Housing material	Metal	
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1200 m <sup>2</sup>	
Product weight	31.4 kg	
Catch bag	•	
Scarifier roller	•	
Article number	3420019 4 006825 638073	

Spare scarifier roller	3420021	4 006825 603309



# **GARDEN ROLLER**

# GC-GR 57

Working width	57 cm	
Roller diameter	32 cm	
Filling quantity	46 I	
Housing material	Coated metal	
Product weight	10.5 kg	
Article number	3415302	4 006825 627404



# **MULTI-PURPOSE SPREADER**

# GC-SR 12

Spread width	45 cm	
Capacity of grit box	12 l	
Wheel diameter	200 mm	
Product weight	2.5 kg	
Article number	3415238	4 006825 635065



# **ELECTRIC LAWN TRIMMER**

# GC-ET 4530 Set

Mains connection / rated input	230 V ~ 50 Hz / 45	50 W
Cutting width (thread)	300 mm	
Thread diameter / length	1.4 mm / 1000 cn	n
Single / twin line cutting	Twin line cutting	
Housing material	Plastic	
Product weight	2.6 kg	
Thread spool	• (3 pcs)	
Article number	3402022	4 006825 610505

Spare line spool	3405685	4 006825 610680



Additional handleCable-relief clipAutomatic jog line feed



# **ELECTRIC LAWN TRIMMER**

# **GC-ET 3023**

Mains connection / rated input	230 V ~ 50 Hz / 3	00 W
Cutting width (thread)	230 mm	
Thread diameter / length	1.5 mm / 600 cm	
Single / twin line cutting	Single line cutting	
Housing material	Plastic	
Product weight	1.5 kg	
Thread spool	•	
Article number	3402050	4 006825 598162

3405695	4 006825 599213
	3405695


# Additional handleCable-relief clip >> Automatic jog line feed

# **ELECTRIC LAWN TRIMMER**

# **GC-ET 2522**

Mains connection / rated input	230 - 240 V ~ 50 Hz / 250 W	
Cutting width (thread)	220 mm	
Thread diameter / length	1.2 mm / 600 cm	
Single / twin line cutting	Twin line cutting	
Housing material	Plastic	
Product weight	1.1 kg	
Thread spool	•	
Article number	3402040	4 006825 616699

Spare line spool	3405075	4 006825 618723
------------------	---------	-----------------



Quick Start

Autochoke
Centrifugal clutch for cutting tool
Automatic jog line feed



# **PETROL LAWN TRIMMER**

# GC-PT 2538/1 I AS

Engine / displacement	2-stroke engine / 25.4 cm <sup>3</sup>	
Power rating	0.6 kW	
Cutting width (thread)	380 mm	
Thread diameter / length	2 mm / 400 cm	
Single / twin line cutting	Twin line cutting	
Housing material	Plastic	
Product weight	5.5 kg	
Article number	3401938	4 006825 643800


Spare line spool	3405220	4 006825 558975

# PETROL MULTIFUNCTIONAL TOOL

# **GC-MM 52 I AS**

Engine / displacement	2-stroke engine / 51.7 cm <sup>3</sup>	
Power rating	1.5 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.4 mm / 400 cm	
Cutting width (blade)	255 mm	
Cutting length chainsaw	255 mm	
Chain cutting speed	21.3 m/s	
Blade length of hedge trimmer	395 mm	
Spacing between teeth (hedge trimmer)	31 mm	
Max. working height of elevated	3.5 m (pruner) /	
tools	3.5 m (hedge trimmer)	
Article number	3436555	4 006825 641684

Spare chain 25cm 1,3 39T 3/8	4500364	4 006825 644616
Spare bar 25cm 1,3	4500363	4 006825 644609
Spare line spool	3405086	4 006825 546019
Grass Blade 255	3404996	4 006825 607239
Thicket Blade 255	3405082	4 006825 632774



Exteriorable fraction
 Long handle made of aluminium tube
 Split shaft
 Autochoke

>> Digital ignition – stable engine run

Digital ignition = stable engine full
 Automatic jog line feed
 Cutting unit (Hedge Trimmer) tiltable
 OREGON quality bar and chain
 Automatic chain lubrication
 Adjustable handle

>> Protective cover

>> Carrying belt with quick release



OREGON





# **PETROL SCYTHE**

# GC-BC 36-4 S

4-stroke engine / 37.7 cm <sup>3</sup>		
1.0 kW		
420 mm		
2.4 mm / 400 cm		
255 mm		
Aluminium/plastics		
7.9 kg		
•		
3436560	4 006825 648751	
	1.0 kW 420 mm 2.4 mm / 400 cm 255 mm Aluminium/plast 7.9 kg	

Spare line spool	3405240	4 006825 598643
------------------	---------	-----------------

# **PETROL SCYTHE**

# **GC-BC 52 I AS**


2-stroke engine / 51.7 cm <sup>3</sup>	
1.5 kW	
420 mm	
2.4 mm / 400 cm	
255 mm	
Aluminium/plastics	
8.5 kg	
•	
3436540	4 006825 617337
	1.5 kW 420 mm 2.4 mm / 400 cm 255 mm Aluminium/plasti 8.5 kg

# **PETROL SCYTHE**

# GH-BC 43 AS

Engine / displacement	2-stroke engine /	42.7 cm³
Power rating	1.25 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.4 mm / 400 cm	
Cutting width (blade)	255 mm	
Housing material	Aluminium/plastics	
Product weight	8.9 kg	
Blade + thread spool	•	
Article number	3401973	4 006825 594768

Spare line spool	3405086	4 006825 546019
------------------	---------	-----------------

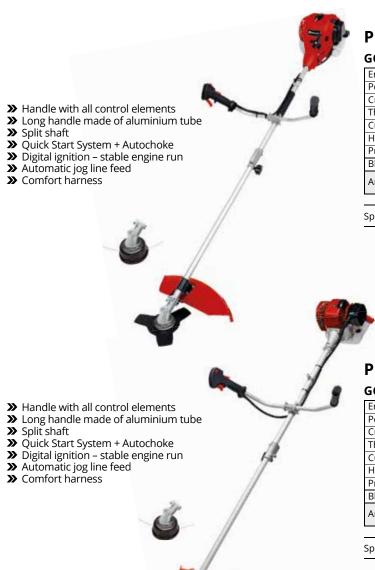

# **PETROL SCYTHE**

# GC-BC 30/1 I AS

Engine / displacement	2-stroke engine / 29.7 cm³		
Power rating	1.0 kW		
Cutting width (double thread)	420 mm		
Thread diameter / length	2.0 mm / 400 cm		
Cutting width (blade)	230 mm		
Housing material	Aluminium/plastics		
Product weight	7.6 kg		
Blade + thread spool	•		
Article number	3436525	4 006825 649086	

Spare line spool	3405086	4 006825 546019
------------------	---------	-----------------

# **PETROL SCYTHE**

# GC-BC 25/1 I AS

Engine / displacement	2-stroke engine / 25.4 cm <sup>3</sup>	
Power rating	0.75 kW	
Cutting width (double thread)	420 mm	
Thread diameter / length	2.0 mm / 400 cm	
Cutting width (blade)	230 mm	
Housing material	Aluminium/plastics	
Product weight	6.3 kg	
Blade + thread spool	•	
Article number	3401957	4 006825 643824

Spare line spool	3405086	4 006825 546019

# Accessories (fit all Einhell scythes)

Туре	Article number	EAN	Suitable for
Mowing line Basic Line 1,3	3436650	4 006825 637861	-
Mowing line Basic Line 1,6	3436651	4 006825 637878	-
Mowing line Basic Line 2,0	3406652	4 006825 637885	-
Mowing line Super Cut Line 2,0	3436653	4 006825 637892	-
Mowing line Super Cut Line 2,4	3436654	4 006825 637915	-
Mowing line Super Cut Line 3,0	3436656	4 006825 637939	-
Mowing line Low Noise Line 2,4	3436655	4 006825 637922	-
Mowing line Low Noise Line 3,0	3436657	4 006825 637946	-
Special Grass Blade 230	3436660	4 006825 637953	grass and light vegetation
Thicket Blade 255	3405082	4 006825 632774	wild growth, scrup and thicket
Thicket Blade 200	3405083	4 006825 651454	wild growth, scrup and thicket
Grass Blade 255	3404996	4 006825 607239	tough grass and strong vegetation
Grass Blade 230	3436661	4 006825 637960	tough grass and strong vegetation



Side limiting discsSwivelling guide wheel

>> Quick Start

Cultivator blade stopped by dead man's circuit
Ergonomic handlebar
Height adjustable

steady grips

Meight adjustable

brake shoe



Engine / displacement	4-stroke engine / 150 cm <sup>3</sup>	
Power / working speed	2.5 kW / 3400 min <sup>-1</sup>	
Working width	600 mm	
Working depth	230 mm	
Number of blades	6	
Cultivator blade diameter	260 mm	
Fuel tank capacity	1.2	
Product weight	35.0 kg	
Article number	3430281	4 006825 646351



### **GC-MT 2236**

Engine / displacement	4-stroke engine / 140 cm³		
Power / working speed	2.2 kW / 3200 min <sup>-1</sup>		
Working width	360 mm		
Working depth	220 mm		
Number of blades	4		
Cultivator blade diameter	260 mm		
Fuel tank capacity	2.0		
Product weight	28.8 kg		
Article number	3431501 4 006825 638066		

Swivelling guide wheelQuick StartCultivator blade stopped by dead man's circuit

transportation Ergonomic handlebarFolding handlebar

Ergonomic handlebar
Height adjustable steady grips
Height adjustable brake shoe



### **ELECTRIC TILLER**

### GC-RT 1545 M

Mains connection / rated input	230 - 240 V ~ 50	Hz / 1500 W
Working width	450 mm	
Working depth	220 mm	
Number of blades	6	
Cultivator blade diameter	200 mm	
Product weight	10.4 kg	
Article number	3431060	4 006825 652598

- Cable-relief clipErgonomic handlebarFolding handlebar



### **ELECTRIC TILLER**

### GC-RT 7530

Mains connection / rated input	230 V ~ 50 Hz / 750 W	
Working width	300 mm	
Working depth	200 mm	
Number of blades	4	
Cultivator blade diameter	220 mm	
Product weight	7.4 kg	
Article number	3431050	4 006825 602005



### **ELECTRIC HEDGE TRIMMER**

### **GE-EH 7067**

Mains connection / rated input	220 - 240 V ~ 50 Hz / 700 W	
Bar length	710 mm	
Cutting length	670 mm	
Spacing between teeth	30 mm	
Cuts per minute	3000 min <sup>-1</sup>	
Product weight	3.7 kg	
Protective cover with wall mount	•	
Article number	3403340	4 006825 616170

# >> Turnable rear handle Turnable rear handle Cutting collector Laser-cut and diamond-ground blades Metal gear box Soft grip Aluminium cover over cutters Protection shield Cable-relief clip

### **ELECTRIC HEDGE TRIMMER**

### **GE-EH 6560**

Mains connection / rated input	220 - 240 V ~ 50 Hz / 650 W	
Bar length	660 mm	
Cutting length	600 mm	
Spacing between teeth	30 mm	
Cuts per minute	3000 min <sup>-1</sup>	
Product weight	3.7 kg	
Protective cover with wall mount	•	
Article number	3403330	4 006825 616163





### **ELECTRIC HEDGE TRIMMER**

### GC-EH 6055/1

Mains connection / rated input	220 - 240 V ~ 50 I	Hz / 600 W
Bar length	610 mm	
Cutting length	550 mm	
Spacing between teeth	26 mm	
Cuts per minute	2800 min <sup>-1</sup>	
Product weight	3.5 kg	
Protective cover with wall mount	•	
Article number	3403320	4 006825 622157

# Laser-cut and diamond-ground blades Metal gear box Soft grip Aluminium cover over cutters Protection shield Cable-relief clip

### **ELECTRIC HEDGE TRIMMER**

### GC-EH 4550

Mains connection / rated input	230 V ~ 50 Hz / 450 W		
Bar length	560 mm		
Cutting length	500 mm		
Spacing between teeth	16 mm		
Cuts per minute	3200 min <sup>-1</sup>		
Product weight	2.5 kg		
Protective cover with wall mount	•		
Article number	3403370	4 006825 608236	



### **ELECTRIC HEDGE TRIMMER**

### **GH-EH 4245**

Mains connection / rated input	230 V ~ 50 Hz / 420 W		
Bar length	510 mm		
Cutting length	450 mm		
Spacing between teeth	16 mm		
Cuts per minute	3200 min <sup>-1</sup>		
Product weight	2.5 kg		
Protective cover with wall mount	•		
Article number	3403460	4 006825 585049	

# Swivel handle Ergonomic handle Anti-vibration system Autochoke - Quick Start System Laser-cut blades Protection shield Safety switch

### PETROL HEDGE TRIMMER

### **GE-PH 2555 A**

Power rating	0.85 kW	
Engine displacement	24.5 cm <sup>3</sup>	
Bar length	610 mm	
Cutting length	550 mm	
Spacing between teeth	28 mm	
Cuts per minute	2050 min <sup>-1</sup>	
Product weight	5.4 kg	
Protective cover	•	
Article number	3403835	4 006825 585186



### **Maintenance Spray**

Suitable for	Hedge trimmers, grass and shrub shears
Article number	3403099
EAN	4 006825 654608



### **CORDLESS GRASS AND SHRUB SHEARS**

### GC-CG 3,6/70 Li

Li-lon Battery Pack	3.6 V / 2.0 Ah	
Charging time	3-5 h	
Operating time per battery charge	60 min	
Cutting width with grass shear blade	70 mm	
Cutting length with shrub cutting blade	110 mm	
Spacing between teeth of shrub cutting blade	8 mm	
Product weight	1.0 kg	
Article number	3410360	4 006825 665161



### **CORDLESS GRASS AND SHRUB SHEARS**

### GC-CG 3,6/70 Li WT

Li-lon Battery Pack	3.6 V / 2.0 Ah	
Charging time	3-5 h	
Operating time per battery charge	60 min	
Cutting width with grass shear blade	70 mm	
Cutting length with shrub cutting blade	110 mm	
Spacing between teeth of shrub cutting blade	8 mm	
Product weight	0.6 kg	
Article number	3410365	4 006825 665444





### GC-EC 7520 T

Mains connection	230 - 240 V ~ 50	Hz
Rated input	750 W	
Bar length	200 mm	
Cutting length	180 mm	
Cutting speed	11 m/s	
Max. working height	3.0 m	
Product weight	3.6 kg	
Protective cover	•	
Carrying belt with quick release	•	
Article number	4501240	4 006825 665277

Spare chain 20cm 16Z	4500124	4 006825 666632
Spare bar 20 cm 1,1	4500154	4 006825 666625

### >> Extendable handle

- Toolless chain tensioning
   Automatic chain lubrication
   Large oil filler opening

- Cutting head tiltable
   Turnable rear handle
   Laser-cut and diamond-ground blades
- >> Metal gear box

### GC-HH 9046

Mains connection	230 - 240 V ~ 50 Hz
Rated input	900 W
Bar length	460 mm
Cutting length	412 mm
Spacing between teeth	20 mm
Max. working height	3.0 m
Product weight	4.9 kg
Protective cover	•
Carrying belt with quick release	•
Article number	3403880 4 006825 666663

**ELECTRIC TELESCOPIC HEDGE TRIMMER** 

- Extendable handle
  Cutting head tiltable
  Laser-cut and diamond-ground blades
  Metal gear box

### **ELECTRIC TELESCOPIC HEDGE TRIMMER**

### GC-HH 5056

Mains connection	230 - 240 V ~ 50 I	Hz
Rated input	500 W	
Bar length	560 mm	
Cutting length	470 mm	
Spacing between teeth	20 mm	
Max. working height	3.0 m	
Product weight	4.2 kg	
Protective cover	•	
Carrying belt with quick release	•	
Article number	3403870	4 006825 666656



### **ELECTRIC MULTIFUNCTIONAL TOOL**

### GC-HC 90/2046 T

Mains connection	230 - 240 V ~ 50 Hz	
Rated input	900 W	
Bar length (chainsaw)	200 mm	
Chain cutting speed	11 m/s	
Blade length of hedge trimmer	412 mm	
Spacing between teeth (hedge trimmer)	20 mm	
Max. working height	3.0 m (pruner) / 3.0 m (hedge trimmer)	
Product weight	6.9 kg (incl. all attachments)	
Protective cover	•	
Carrying belt with quick release	•	
Article number	4501290	4 006825 666915

Spare chain 20cm 1,1 33T 3/8	4500187	4 006825 615463
Spare bar 20cm 1,2	4500167	4 006825 615456



- >> Metal gearing
- >> OREGON quality bar and chain
- Toolless chain tensioning and changing
   Automatic chain lubrication
   Sturdy stop claws made of metal

- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- Soft gripSoft start

### **ELECTRIC CHAINSAW**

### **GE-EC 2240**

Mains connection	220 - 240 V ~ 50/60 Hz
Rated input	2200 W
Bar length	406 mm
Cutting length	375 mm
Cutting speed	15 m/s
Oil tank capacity	150 ml
Product weight	5.6 kg
Protective cover	•
Article number	4501740 4 006825 602524

Spare chain 40cm (56T)	4500320	4 006825 578126
Spare bar	4500332	4 006825 546637



- Sturdy stop claws made of metal
   Kickback protection with mechanical instant chain brake
- >> Soft grip

### **ELECTRIC CHAINSAW**

### **GC-EC 2040**

Mains connection	230 - 240 V ~ 50 Hz	
Rated input	2000 W	
Bar length	400 mm	
Cutting length	375 mm	
Cutting speed	15.5 m/s	
Oil tank capacity	160 ml	
Product weight	5.0 kg	
Protective cover	•	
Article number	4501230	06825 660036

Spare chain 40cm 1,3 57T 3/8 (PJ)	4500313	4 006825 663648
Spare bar	4500332	4 006825 546637



- >> Sturdy stop claws made of metal
- Startey step claws made of metal
   Kickback protection with mechanical instant chain brake
   Chain catch bolt
   Soft grip

### **ELECTRIC CHAINSAW**

### **GC-EC 1935**

Mains connection	230 - 240 V ~ 50 I	Hz
Rated input	1900 W	
Bar length	350 mm	
Cutting length	325 mm	
Cutting speed	15.5 m/s	
Oil tank capacity	160 ml	
Product weight	4.7 kg	
Protective cover	•	
Article number	4501220	4 006825 660029

Spare chain 35cm 1,3 52T 3/8 (PJ)	4500173	4 006825 663655
Spare bar 35cm 1,3	4500158	4 006825 663846



- >> Sturdy stop claws made of metal
- >> Kickback protection with mechanical instant chain brake
- >> Chain catch bolt
- >> Soft grip

### **ELECTRIC CHAINSAW**

### **GH-EC 1835**


Mains connection	230 - 240 V ~ 50 H	-lz
Rated input	1800 W	
Bar length	350 mm	
Cutting length	325 mm	
Cutting speed	13.5 m/s	
Oil tank capacity	160 ml	
Product weight	5.4 kg	
Protective cover	•	
Article number	4501710	4 006825 588156

Spare chain 35cm 1,3 52T 3/8	4500171	4 006825 548846
Spare bar	4500344	4 006825 594188



### **Chainsaw Trestle**

Profile thickness	1.9 mm
Maximum load capacity	150 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	7.1 kg
Article number	4500067
EAN	4 006825 548693



### **Chainsaw Trestle 2.5**

Profile thickness	2.5 mm
Maximum load capacity	200 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	8.9 kg
Article number	4500690
EAN	4 006825 678826



rolest salety neilliet		
Head circumference	52-66 cm	
Product weight	0.7 kg	
Article number	4500480	
EAN	4 006825 544565	



- OREGON quality bar and chain
   Digital ignition stable engine run
   Autochoke Quick Start System + Primer
- >> Automatic chain lubrication
- >> Sturdy stop claws made of metal
- >> Kickback protection with instant chain brake

### **PETROL CHAINSAW**

### GC-PC 2040 I

Power rating	2.0 kW / 2.7 PS
Engine displacement	50.4 cm <sup>3</sup>
Bar length	400 mm
Cutting length	390 mm
Cutting speed	21 m/s
Fuel tank capacity	540 ml
Oil tank capacity	240 ml
Product weight	6.5 kg
Protective cover	•
Petrol/oil mixing bottle	•
Article number	4501851 4 006825 613278

Spare chain 40cm (57T) Petrol	4500176	4 006825 548839
Spare bar 40cm 1,3	4500156	4 006825 548778



- OREGON quality bar and chain
   Digital ignition stable engine run
   Autochoke Quick Start System + Primer
   Automatic chain lubrication
- >> Sturdy stop claws made of metal
- >> Kickback protection with instant chain brake

### **PETROL CHAINSAW**

### GC-PC 1335/1 I

Power rating	1.3 kW / 1.7 PS
Engine displacement	37.2 cm <sup>3</sup>
Bar length	350 mm
Cutting length	345 mm
Cutting speed	21.9 m/s
Fuel tank capacity	300 ml
Oil tank capacity	170 ml
Product weight	5.3 kg
Protective cover	•
Petrol/oil mixing bottle	•
Article number	4501870 4 006825 641738

Spare chain 35cm 1,3 53T 3/8	4500172	4 006825 600926
Spare bar 35cm 1,3	4500151	4 006825 548907



### **Chainsaw Trestle**

Profile thickness	1.9 mm
Maximum load capacity	150 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	7.1 kg
Article number	4500067
EAN	4 006825 548693



### **Chainsaw Trestle 2.5**

Profile thickness	2.5 mm
Maximum load capacity	200 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	8.9 kg
Article number	4500690
EAN	4 006825 678826



### **Forest Safety Helmet**

Head circumference	52-66 cm
Product weight	0.7 kg
Article number	4500480
EAN	4 006825 544565



### **Combination Canister**

Product weight	0.9 kg	
Petrol tank capacity	31	
Oil tank capacity	1.25	
Article number	4501325	
EAN	4 006825 542851	





Depth stop
 Scale for precise setting of the grinding angle
 Clamping device
 Pivoting grinding head for setting the roof angle
 Light

- >> Light
- >> Transparent window



### **ELECTRIC CHAIN SHARPENER**

### GC-CS 235 E

Mains connection	230 V ~ 50 Hz	
Rated input	235 W	
Grinding wheel diameter (inside)	22 mm	
Grinding wheel diameter (outside)	145 mm	
Grinding wheel thickness	3.2 mm	
Product weight	5.8 kg	
Article number	4499910	4 006825 613148

Spare grinding wheel 3,2 mm Pro	4599990	4 006825 552881
Spare grinding wheel 4,5 mm Profi	4599980	4 006825 552874

Depth stopScale for precise setting of the grinding angleClamping device



### **ELECTRIC CHAIN SHARPENER**

### GC-CS 85 E

Mains connection	220 - 240 V ~ 50	Hz
Rated input	85 W	
Grinding wheel diameter (inside)	23 mm	
Grinding wheel diameter (outside)	108 mm	
Grinding wheel thickness	3.2 mm	
Product weight	1.9 kg	
Article number	4499920	4 006825 613834

Spare grinding wheel 3.2 mm	4500076	4 006825 548860
Spare grinding wheel 4.5 mm	4500071	4 006825 548853

### **ELECTRIC LEAF VACUUM**

### **GC-EL 3000 E**

Mains connection	220 - 240 V ~ 50 Hz		
Rated input	3000 W		
Max. blow velocity	300 km/h		
Max. suction power	840 m³/h		
Idle speed	8000 - 15000 min <sup>-1</sup>		
Shredding function	15:1		
Debris bag volume	45 l		
Product weight	3.0 kg (blow) / 4.2 kg (vacuum)		
Article number	3433320	4 004825 429451	

>> Toolless change-over between suction and blowing function >> Electronic speed control

>> Additional handle (adjustable) Additional Haritie (adjustable)
 Aluminum blower impeller
 Guiding wheels (height adjustable)
 Debris bag with window
 Carrying strap
 Soft grip






>> Toolless change-over between suction and blowing function

- Electronic speed controlAdditional handle
- Guiding wheels
- >> Debris bag with window
- >> Carrying strap



ELECTRIC LEAF VACUUM	
GC-EL 3024 E	

Mains connection	230 - 240 V ~ 50 Hz	
Rated input	3000 W	
Max. blow velocity	240 km/h	
Max. suction power	650 m³/h	
Idle speed	7000 - 13500 min <sup>-1</sup>	
Shredding function	10:1	
Debris bag volume	40	
Product weight	3.1 kg	
Article number	3433370 4 006825 658606	



- >> Generous funnel opening
- > Motor protection switch



### **GARDEN SHREDDER**

### GC-KS 2540 CB

Mains connection	220 - 240 V ~ 50 Hz	
Rated input	2500 W (P40) / 2000 W	
Idle speed	3800 min <sup>-1</sup>	
Max. branch diameter	40 mm	
Capacity of catch box	55 I	
Product weight	13.0 kg	
Prodder incl.	•	
Debris box	•	
Article number	3430400 4 006825 652765	

Spare blade	3405930	4 006825 595680

- Transport wheelsTransport handle
- Generous funnel openingMotor protection switch



### **GARDEN SHREDDER**

### GC-KS 2540

Article number	3430330	4 006825 638233		
Garden rubbish bag	•	•		
Prodder incl.	•	•		
Product weight	10.2 kg	10.2 kg		
Max. branch diameter	40 mm	40 mm		
Idle speed	3800 min <sup>-1</sup>	3800 min <sup>-1</sup>		
Rated input	2500 W (P40) / 2	2500 W (P40) / 2000 W		
Mains connection	220 - 240 V ~ 50	220 - 240 V ~ 50 Hz		

Spare blade	3405930	4 006825 595680
-------------	---------	-----------------






### **ELECTRIC ROLLER SHREDDER**

### GC-RS 60 CB

Mains connection	230 - 240 V ~ 50 Hz	
Rated input	2800 W (P40) / 2300 W	
Idle speed	40 min <sup>-1</sup>	
Max. branch diameter	45 mm	
Capacity of catch box	60 I	
Product weight	29.5 kg	
Debris box	•	
Article number	3430635 4 006825 645880	



- Reverse running switchGenerous funnel opening



### **ELECTRIC ROLLER SHREDDER**

### GC-RS 2540

Mains connection	230 V ~ 50 Hz	
Rated input	2500 W (P40) / 2000 W	
Idle speed	40 min <sup>-1</sup>	
Max. branch diameter	40 mm	
Product weight	24.9 kg	
Garden rubbish bag	•	
Article number	3430620	4 006825 608403

- >> Aqua Sensor Technology
- **>>>** Permanent mode without sensor start
- >> Non-return valve
- >> High-quality mechanical sealing
- Carry handleSuspension eye
- >> ECO Power



### 'AQUA SENSOR' CLEAR WATER PUMP

### GE-SP 4390 N-A LL ECO

Mains voltage	230 V ~ 50 Hz	
Rated input	430 W	
Max. delivery capacity / height	9000 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	1 mm	
Pump start during continuous operation	5 mm	
Sensor start heights 1 / 2 / 3	5 / 56 / 103 mm	
Suction down to	1 mm	
Hose connection	47.8 mm (1½") ET	•
Power cord	10 m	
Product weight	4.9 kg	
Universal hose adapter	•	
Article number	4171440	4 006825 622263

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------



- Aqua Sensor TechnologyPermanent mode without sensor start
- >> Non-return valve
- >> High-quality mechanical sealing
- Integrated cable rewind
   Carry handle
   Suspension eye
   ECO Power



### 'AQUA SENSOR' DIRTY WATER PUMP

### **GE-DP 7935 N-A ECO**

GE DI 7555 IT / LCC		
Mains voltage	230 V ~ 50 Hz	
Rated input	790 W	
Max. delivery capacity / height	19000 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Pump start during continuous operation	50 mm	
Sensor start heights 1 / 2 / 3	70 / 135 / 188 mm	
Suction down to	40 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	6.2 kg	
Universal hose adapter	•	
Article number	4171460	4 006825 622287

Quick connector	4173764	4 006825 673166

### >> Aqua Sensor Technology

- >> Permanent mode without sensor start
- >> Non-return valve
- High-quality mechanical sealing
  Integrated cable rewind
  Carry handle

- >> Suspension eye
- >> ECO Power



### 'AQUA SENSOR' DIRTY WATER PUMP

### **GE-DP 6935 A ECO**

Mains voltage	230 V ~ 50 Hz	
Rated input	690 W	
Max. delivery capacity / height	17500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Pump start during continuous	50 mm	
operation	30 111111	
Sensor start heights 1 / 2 / 3	70 / 135 / 188 mm	
Suction down to	40 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	5.7 kg	
Universal hose adapter	•	
Article number	4171450	4 006825 622270

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------

- >> 3-in-1 function: Pumping of clear water, dirty water and Aquasensor
- >> Aqua Sensor Technology
- >>> Permanent mode without sensor start
- >> Patented suction level control
- >> Non-return valve
- >> High-quality mechanical sealing
- >> Integrated cable rewind
- >> Carry handle
- >> Suspension eye
- >> ECO Power




### **MULTI-PURPOSE PUMP**

### **GE-DP 7935 N-A LL ECO**

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	790 W	
Max. delivery capacity / height	19500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Sensor start heights 1 / 2 / 3 in clear water mode	15 / 100 / 150 mr	n
Sensor start heights 1 / 2 / 3 in dirt water mode	50 / 130 / 180 mr	m
Starting of pump from water level of	15 mm	
Suction down to	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	6.3 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4171465	4 006825 673357

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------



- >> Float switch
- >> Patented suction level control
- >> Non-return valve
- >> High-quality mechanical sealing
- >> Integrated cable rewind
- >> Carry handle
- >> Suspension eye
- >> ECO Power



### **MULTI-PURPOSE PUMP**

### **GE-DP 7535 N LL ECO**

Mains voltage	220 - 240 V ~ 50 Hz	
Rated input	750 W	
Max. delivery capacity / height	18500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	15 mm	
Suction down to	1 mm	
Hose connection	47.8 mm (1½") ET	
Power cord	10 m	
Product weight	6.3 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4181600	4 006825 673364

Quick connector	4173764	4 006825 673166

### **NEW**



- >> 2-in-1 function: Pumping of clear water and dirty water
- >> Float switch
- >> Patented suction level control
- >> Non-return valve
- >> High-quality mechanical sealing
- >> Integrated cable rewind
- Carry handleSuspension eyeECO Power
- >> Hinged filter box
- >> Quick couplings
- >> Fabric Hose



### **MULTI-PURPOSE PUMP**

### Flood Set GE-DP 7535 N LL ECO

Mains voltage	220 - 240 V ~ 50 H	Hz
Rated input	750 W	
Max. delivery capacity / height	18500 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	15 mm	
Suction down to	1 mm	
Hose connection	47.8 mm (1½") ET	-
Power cord	10 m	
Product weight	12 kg	
Universal hose adapter	•	
Quick Connector	•	
Fabric hose (10 m)	•	
Plastic box	•	
Article number	4181515	4 006825 683158

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------

- >> Float switch
- >> Patented suction level control
- Non-return valve
  High-quality mechanical sealing
  Integrated cable rewind
  Carry handle



### **MULTI-PURPOSE PUMP**

### GC-DP 7035 LL

Mains voltage	230 V ~ 50 Hz	
Rated input	700 W	
Max. delivery capacity / height	16000 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Starting of pump from water level of	10 mm	
Suction down to	1 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	4.5 kg	
Universal hose adapter	•	
Article number	4181570	4 006825 662085

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------



### SUBMERSIBLE PUMP DIRTY/CLEAR WATER **ECO**

### **GE-DP 3925 ECO**

GE-DF 3923 ECO		
Suitable for	Dirty water	
Mains voltage	230 V ~ 50 Hz	
Rated input	390 W	
Max. delivery capacity / height	10000 l/h / 6 m	
Max. immersion depth	7 m	
Min. water level for pump start	50 mm	
Max. size of foreign particle	25 mm	
Hose connection	47.8 mm (1½") ET	=
Power cord	10 m	
Product weight	4.5 kg	
Universal hose adapter	•	
Article number	4170710	4 006825 572339

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------

- High-quality mechanical sealingFloating switch (automatic mode)
- Cast iron housingCarry handle



### **DIRTY WATER PUMP**

### GC-DP 1340 G

Mains voltage	230 V ~ 50 Hz	
Rated input	1300 W	
Max. delivery capacity / height	23000 l/h / 10 m	
Max. immersion depth	5 m	
Max. size of foreign particle	40 mm	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	19.3 kg	
Universal hose adapter	•	
Lowering rope (6 m)	•	
Article number	4170742	4 006825 597882

- High-quality mechanical sealing
   Floating switch (automatic mode)
   Cast iron housing
   Carty handle

- >> Cutting unit system



### **DIRTY WATER PUMP**

### GE-DP 900 Cut

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	16000 l/h / 11.5 r	n
Max. immersion depth	7 m	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	17.0 kg	
Universal hose adapter	•	
Article number	4181550	4 006825 660852

- High-quality mechanical sealingFloating switch (automatic mode)Carry handle



### **DIRTY WATER PUMP**

### GC-DP 5010 G

Mains voltage	220 - 240 V ~ 50 Hz
Rated input	500 W
Max. delivery capacity / height	12000 l/h / 8 m
Max. immersion depth	5 m
Max. size of foreign particle	10 mm
Hose connection	42 mm (1¼") IT
Power cord	10 m
Product weight	10.6 kg
Universal hose adapter	•
Article number	4171421 4 006825 626193

- High-quality mechanical sealing
   Floating switch (automatic + manual mode)
   Integrated cable rewind
   Carry handle



### **DIRTY WATER PUMP**

### GC-DP 9040 N

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	22000 l/h / 9 m	
Max. immersion depth	7 m	
Max. size of foreign particle	40 mm	
Hose connection	59.6 mm (2") IT	
Power cord	10 m	
Product weight	7.5 kg	
Universal hose adapter	•	
Article number	4181510	4 006825 654189

### **NEW**

- High-quality mechanical sealing
   Floating switch (automatic + manual mode)
   Integrated cable rewind

- Carry handleECO-PLUS technology



### **DIRTY WATER PUMP**

### **GC-DP 7035 N ECO PLUS**

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	700 W	
Max. delivery capacity / height	19000 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	5.0 kg	
Universal hose adapter	•	
Article number	4170765	4 006825 680928

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------

# High-quality mechanical sealing Floating switch (automatic + manual mode) Integrated cable rewind Carry handle



### **DIRTY WATER PUMP**

### GC-DP 7835

ac Di 7055		
Mains voltage	230 V ~ 50 Hz	
Rated input	780 W	
Max. delivery capacity / height	15700 l/h / 8 m	
Max. immersion depth	7 m	
Max. size of foreign particle	35 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	5.2 kg	
Universal hose adapter	•	
Quick Connector	•	
Article number	4170682	4 006825 587210

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------



### **DIRTY WATER PUMP**

### GC-DP 6315 N

Mains voltage	230 V ~ 50 Hz	
Rated input	630 W	
Max. delivery capacity / height	17000 l/h / 8 m	
Max. immersion depth	5 m	
Max. size of foreign particle	15 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	4.7 kg	
Universal hose adapter	•	
Article number	4170491	4 006825 587234

Quick connector	4173764	/ 004835 477144

- High-quality mechanical sealing
   Floating switch (automatic + manual mode)
   Integrated cable rewind
   Carry handle



- High-quality mechanical sealing
   Floating switch (automatic + manual mode)
   Carrying handle (foldable)



### **DIRTY WATER PUMP**

### **GC-DP 3325**

Mains voltage	230 V ~ 50 Hz	
Rated input	330 W	
Max. delivery capacity / height	9500 l/h / 6 m	
Max. immersion depth	7 m	
Max. size of foreign particle	25 mm	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Product weight	3.6 kg	
Universal hose adapter	•	
Article number	4181530	4 006825 655087

Quick connector	4173764	4 006825 673166
-----------------	---------	-----------------



4 006825 623581

- >> Integrated float switch (automatic + manual mode)
- >> Carry handle



### Product weight 4.4 kg Universal hose adapter Article number 4170463

Min. water level for pump start

Max. delivery capacity / height

Max. immersion depth

**CLEAR WATER PUMP** 

GC-SP 5511 IF Mains voltage

Hose connection

Suction down to

Rated input

Power cord

006825 673166 4173764 Quick connector

230 V ~ 50 Hz

47.8 mm (1½") IT

550 W 11000 l/h / 8.5 m

7 m

10 m

60 mm

5 mm

- High-quality mechanical sealingFloating switch (automatic +
- manual mode)
- Integrated cable rewindCarry handle



### **CLEAR WATER PUMP**

### GC-SP 3580 LL

230 V ~ 50 Hz	
350 W	
8000 l/h / 7.5 m	
7 m	
47.8 mm (1½") IT	
10 m	
8 mm	
1 mm	
3.1 kg	
•	
•	
4170445	4 006825 615197
	350 W 8000 l/h / 7.5 m 7 m 47.8 mm (1½") IT 10 m 8 mm 1 mm 3.1 kg

Ouisk sannastar	4172764	
Quick connector	4173764	4 006825 673166

- >> High-quality mechanical sealing >>> Floating switch (automatic + manual mode)
- >> Carrying handle (foldable)



### **CLEAR WATER PUMP**

### GC-SP 2275

Mains voltage	230 V ~ 50 Hz	
Rated input	220 W	
Max. delivery capacity / height	7500 l/h / 6 m	
Max. immersion depth	7 m	
Hose connection	47.8 mm (1½") IT	
Power cord	10 m	
Suction down to	8 mm	
Product weight	3.4 kg	
Universal hose adapter	•	
Article number	4181520	4 006825 655070

Quick connector	4173764	4 006825 673166



- >> Infinitely adjustable floating switch
- Integrated cable rewind
- Carry handle
- Flexible gooseneckStorage compartment for extensions
- >> Automatic mode
- Dry running protection
- ➤ 4-stage pump impeller
- >> High-quality mechanical sealing

- Align equality internation sea
   Overload protection
   Integrated non-return valve
   Stainless steel dirt screen
   High-quality stainless steel pump housing
- >> Carry handle



### **RAIN BARREL PUMP**

### **GE-SP 3546 RB**

Mains voltage	230 V ~ 50 Hz	
Rated input	350 W	
Max. delivery capacity / height	4600 l/h / 11 m	
Max. immersion depth	7 m	
Max. size of foreign particle	2.5 mm	
Hose connection	26.4 mm (¾") ET	
Power cord	10 m	
Product weight	5.0 kg	
Article number	4170438	4 006825 623598

### SUBMERSIBLE PRESSURE PUMP

### **GE-PP 1100 N-A**

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	1100 W	
Max. delivery capacity / height	6000 l/h / 45 m	
Max. immersion depth	12 m	
Hose connection	33.3 mm (1") IT	
Power cord	15 m	
Product weight	8.7 kg	
Article number	4171430	4 006825 622294



- **≫** 3-stage pump impeller
- >> High-quality mechanical sealing
- Overload protection
- >> High-quality stainless steel pump housing



### SUBMERSIBLE PRESSURE PUMP

### **GC-PP 900 N**

Mains voltage	230 V ~ 50 Hz	
Rated input	900 W	
Max. delivery capacity / height	6000 l/h / 32 m	
Max. immersion depth	7 m	
Hose connection	33.3 mm (1") IT	
Power cord	10 m	
Product weight	8.9 kg	
Article number	4170964	4 006825 597752



>> Dry running protection

2-stage pump impeller

>> High-quality mechanical sealing

Inigri-quality inectratical sea
 Overload protection
 Integrated non-return valve
 Integrated cable rewind

Carry handle

>> Telescopic extension tube

>> Flexible gooseneck



### SUBMERSIBLE PRESSURE PUMP

### **GE-PP 5555 RB-A**

Mains voltage	230 - 240 V ~ 50 I	Hz
Rated input	550 W	
Max. delivery capacity / height	5500 l/h / 20 m	
Max. immersion depth	7 m	
Hose connection	33.3 mm (1") ET	
Power cord	10 m	
Product weight	5.0 kg	
Article number	4170425	4 006825 648690

- >> Automatic mode

- Automatic mode
  Dry running protection
  8-stage pump impeller
  High-quality mechanical sealing
  Overload protection
- >> Integrated non-return valve
- >> Stainless steel dirt screen
- High-quality stainless steel pump housing



### **DEEP WELL PUMP**

### **GE-DW 1155 N-A**

Mains voltage	220 - 240 V ~ 50	Hz	
Rated input	1100 W	1100 W	
Max. delivery capacity / height	6000 l/h / 55 m	6000 l/h / 55 m	
Max. immersion depth	19 m	19 m	
Hose connection	33.3 mm (1") IT		
Power cord	22 m		
Pump diameter	98 mm		
Product weight	9.8 kg		
Lowering rope (22 m)	•		
Article number	4170937	4 006825 660876	



- 10-stage pump impellerHigh-quality mechanical sealing
- Overload protection

- Noteriodal protection
   Integrated non-return valve
   Stainless steel dirt screen
   High-quality stainless steel pump housing



### **DEEP WELL PUMP**

### GC-DW 1300 N

Mains voltage	230 V ~ 50 Hz	
Rated input	1300 W	
Max. delivery capacity / height	5000 l/h / 65 m	
Max. immersion depth	20 m	
Hose connection	47.8 mm (1½") IT	
Power cord	2 m / 23 m	
Pump diameter	102 mm	
Product weight	15.5 kg	
External switchbox	•	
Lowering rope (20 m)	•	
Article number	4170944	4 006825 597875

- 6-stage pump impeller
   High-quality mechanical sealing
   Overload protection
   Integrated non-return valve
   Stainless steel dirt screen

- >> High-quality stainless steel pump housing



### **DEEP WELL PUMP**

### GC-DW 1045 N

Mains voltage	220 - 240 V ~ 50	Hz
Rated input	1000 W	
Max. delivery capacity / height	6500 l/h / 45 m	
Max. immersion depth	19 m	
Hose connection	42 mm (1¼") IT	
Power cord	22 m	
Pump diameter	98 mm	
Product weight	7.7 kg	
Lowering rope (22 m)	•	
Article number	4170955	4 006825 616446



- >> Water filler screw
- Water filling / dirt / suction indicators
- Water miling? dift? suction indicators
   Integrated pre-filter with non-return valve
   Comfort carrying handle
   Frost protection due to a water drain screw

- >> Thermo protection
- >> Water flow recognition sensor / dry running protection / scalding protection

### **GARDEN PUMP 'PLUS'**

### **GE-GP 1246 N FS**

Mains voltage	220 - 240 V ~ 50 I	Ηz
Rated input	1200 W	
Max. delivery capacity / height	4600 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180360	4 006825 640366



- >> Water filler screw
- >> Water filling / dirt / suction indicators

- Nate: mining y dirty saction indicators
   Integrated pre-filter with non-return valve
   Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection
- >> ECO Power

### **GARDEN PUMP 'PLUS'**

### **GE-GP 1145 ECO**

Mains voltage	220 - 240 V ~ 50 F	Hz
Rated input	1100 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180370	4 006825 647884

### **NEW**





- >> Water filler screw
- >> Water filling indicator
- >> Comfort carrying handle
- >> Frost protection due to a water drain screw
- Thermo protectionECO-PLUS technology
- >> High pumping capacity with low power consumption

### **GARDEN PUMP 'PLUS'**

### **GC-GP 1170 ECO PLUS**

Mains voltage	220 - 240 V ~ 50 I	Нz	
Rated input	1100 W		
Max. delivery capacity / height	7000 l/h / 50 m	7000 l/h / 50 m	
Max. suction height	8 m		
Suction connection	42 mm (1¼") ET		
Pressure connection	33.3 mm (1") IT		
Power cord	1.5 m		
Product weight	9.5 kg		
Incl. adapter 33.3 mm (1") ET	•		
Article number	4180220	4 006825 679779	





- >> Water filler screw
- >> Water filling indicator
- Water Hilling Indicator
   Comfort carrying handle
   Frost protection due to a water drain screw
   Thermo protection

### **GARDEN PUMP 'PLUS'**

### GC-GP 1250 N/1

Mains voltage	220 - 240 V ~ 50 Hz	
Rated input	1200 W	
Max. delivery capacity / height	5000 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	9.7 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180350 4 006825 637281	



- Water filler screwWater filling indicatorComfort carrying handle
- >>> Frost protection due to a water drain screw
- >> Thermo protection

### **GARDEN PUMP 'PLUS'**

### GC-GP 1045

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	1050 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	9.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180340	4 006825 637274





### **GARDEN PUMP 'PLUS'**

### GC-GP 6050 ECO PLUS

Mains voltage	220 - 240 V ~ 50 l	Hz
Rated input	600 W	
Max. delivery capacity / height	5000 l/h / 40 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180210	4 006825 679786
1	•	

- Water filler screwWater filling indicator
- Water filling indicator
   Folding carrying handle
   Frost protection due to a water drain screw
   Thermo protection
   Eco-PLUS technology

- >> High pumping capacity with low power consumption



## **GARDEN PUMP 'PLUS'**

### **GC-GP 6040 ECO**

Mains voltage	220 - 240 V ~ 50 I	Hz
Rated input	600 W	
Max. delivery capacity / height	4000 l/h / 36 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.1 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4180320	4 006825 637250

- Water filler screw
   Water filling indicator
   Folding carrying handle
   Frost protection due to a water drain screw
   Thermo protection
   ECO Power



- Water filler screwWater drain screwHigh-quality mechanical sealCarry handle

### **GARDEN PUMP**

### GC-GP 6538

Mains voltage	220 - 240 V ~ 50 I	∃z
Rated input	650 W	
Max. delivery capacity / height	3800 l/h / 36 m	
Max. suction height	8 m	
Suction connection	33.3 mm (1") ET	
Pressure connection	33.3 mm (1") ET	
Power cord	1.4 m	
Product weight	6.1 kg	
Pump without accessories (GC-GP 6538)	Article number 4180280	4 006825 603477
Pump with suction hose (7 m) (GC-GP 6538 Set)	Article number 4180283	4 006825 611168
Pump with suction hose (4 m), garden hose (20 m) and sprayer (GC-GP 6538 Set/l)	Article number 4180286	4 006825 638875



### **GARDEN PUMP**

### GC-GP 6036

Mains voltage	230 V ~ 50 Hz	
Rated input	600 W	
Max. delivery capacity / height	3600 l/h / 40 m	
Max. suction height	8 m	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	7.4 kg	
Article number	4180269	4 006825 623567

- Water filler screwWater drain screwCarry handle





### **PERIPHERAL PUMP**

### GC-TP 4622

Mains voltage	220 - 240 V ~ 50	Hz
Rated input	460 W	
Max. delivery capacity / height	2250 l/h / 37 m	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	6.1 kg	
Article number	4183400	4 006825 643947

- >> Water filler screw
- >> Water drain screw



- >> Automatic mode
- >> Timer function
- >> Water filler screw
- >> Water filling / dirt / suction indicators
- >> Integrated pre-filter with non-return valve
- Comfort carrying handleFrost protection due to a water drain screw
- Thermo protection
   Water flow recognition sensor / dry running protection / scalding protection

### **AUTOMATIC HOME AND GARDEN PUMP** 'PLUS'

### **GE-AW 1246 N FS**

220 - 240 V ~ 50 I	Hz
1200 W	
4600 l/h / 50 m	
5.0 bar	
8 m	
42 mm (1¼") ET	
33.3 mm (1") IT	
33.3 mm (1") IT	
1.5 m	
15.0 kg	
•	
4177020	4 006825 642476
	4600 l/h / 50 m 5.0 bar 8 m 42 mm (1¼") ET 33.3 mm (1") IT 33.3 mm (1") IT 1.5 m 15.0 kg



- >> Automatic mode
- >> Water filler screw
- Water filling / dirt / suction indicators
   Integrated pre-filter with non-return valve
- > Comfort carrying handle
- >>> Frost protection due to a water drain screw
- >> Thermo protection
- Water flow recognition sensor / dry running protection / scalding protection

### **AUTOMATIC HOME AND GARDEN PUMP** 'PLUS'

### **GE-AW 1042 FS**

Mains voltage	220 - 240 V ~ 50 H	Hz
Rated input	1050 W	
Max. delivery capacity / height	4200 l/h / 48 m	
Max. pressure	4.8 bar	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	15.0 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4177010	4 006825 642469





- App (GSM / Smart)
- >> Programmable operating time for each specific day
- Schedule calculation based on current weather data
- Networkable with all Einhell SMART devices
- Automatic mode
- Dry running protectionLED indicator
- >> Water filler screw
- >> Water drain screw
- Pre-filter + non-return valve
- >> Thermo protection





**SMART** 

Mains voltage Rated input

Max. pressure

Product weight

Article number

Max. suction height

Suction connection

Pressure connection Power cord

**GE-AW 1144 SMART** 

Max. delivery capacity / height



### **CAN BE CONTROLLED FROM EVERYWHERE**

The smart pump can now be controlled from anywhere \* using a smartphone, thanks to the device's mobile internet connection.



### **SCHEDULE MODE**

AUTOMATIC HOME AND GARDEN PUMP

220 - 240 V ~ 50 Hz

42 mm (11/4") ET 33.3 mm (1") IT

1100 W 4400 l/h / 48 m

4.8 bar

1.5 m

11.4 kg 4180380

8 m

The pump's operating times can be set to the minute using the Schedule Mode.



### **SMART MODE**

In smart mode, the pump automatically creates a schedule that is optimally adapted to the weather, customer preferences and behaviour. The pump learns the customer's behaviour based on the application (using AI).



### **NETWORKABLE WITH EINHELL SMART TOOLS**

Einhell Smart Tools work together automatically in Smart Mode.



### **CONSIDERATION OF WEATHER FORE-CASTS**

In Smart Mode, the pump adapts to the local weather conditions thanks to weather forecasts in order to achieve the optimum result.

Another SMART tool from the Einhell range: **PROFESSIONAL Robot Lawn Mower FREELEXO SMART 750** 



### NO WIFI OR BLUETOOTH NEEDED

Unlimited range thanks to communication via the mobile phone network.

\* Prerequisite: Available mobile network coverage; within the European Union



- Automatic mode
- >> Dry running protection
- >> LED indicator
- Water filler screw
- >> Water drain screw
- >> Pre-filter with integrated non-return valve
- >> Carry handle

### **AUTOMATIC HOME AND GARDEN PUMP**

### CC-VM 6333

GC-AW 6333		
Mains voltage	230 V ~ 50 Hz	
Rated input	630 W	
Max. delivery capacity / height	3300 l/h / 36 m	
Max. pressure	3.6 bar	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	7.8 kg	
Article number	4176730	4 006825 609226





### **WATER WORK 'PLUS'**

### **GE-WW 1246 N FS**

Mains voltage	220 - 240 V ~ 50 H	Hz
Rated input	1200 W	
Max. delivery capacity / height	4600 l/h / 50 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Tank volume	20	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Power cord	1.5 m	
Product weight	19.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4173530	4 006825 640373

- Water filler screw
   Water filling / dirt / suction indicators
   Integrated pre-filter with non-return valve
- Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection
- ➤ Water flow recognition sensor / dry running protection / scalding protection



- >> Water filler screw
- Water filling / dirt / suction indicators
- >> Integrated pre-filter with non-return valve
- Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection



### **WATER WORK 'PLUS'**

### **GE-WW 1145 ECO**

Mains voltage	220 - 240 V ~ 50 H	Ηz
Rated input	1100 W	
Max. delivery capacity / height	4500 l/h / 48 m	
Max. suction height	8 m	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Additional pressure side connection	33.3 mm (1") IT	
Tank volume	20	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Power cord	1.5 m	
Product weight	19.5 kg	
Incl. adapter 33.3 mm (1") ET	•	
Article number	4173540	4 006825 647891



### >> Water filler screw

- >> Water filling indicator
- Comfort carrying handle
   Frost protection due to a water drain screw
- >> Thermo protection



### **WATER WORK 'PLUS'**

### **GC-WW 1045 N**

Article number	4173520	4 006825 637304
Incl. adapter 33.3 mm (1") ET	•	
Product weight	17.3 kg	
Power cord	1.5 m	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Tank volume	20	
Pressure connection	33.3 mm (1") IT	
Suction connection	42 mm (1¼") ET	
Max. suction height	8 m	
Max. delivery capacity / height	4500 l/h / 48 m	
Rated input	1050 W	
Mains voltage	220 - 240 V ~ 50	Hz

# Overload protection Water filler screw Water drain screw High-quality mechanical seal >> INOX stainless steel pressure tank

### **WATER WORK**

### **GC-WW 1250 NN**

Mains voltage	220 - 240 V ~ 50 I	∃z
Rated input	1200 W	
Max. delivery capacity / height	5000 l/h / 50 m	
Max. suction height	8 m	
Tank volume	20	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Suction connection	42 mm (1¼") ET	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.7 kg	
Article number	4173490	4 006825 616316



### **WATER WORK**

### GC-WW 6538

GC-VVVV 0550			
Mains voltage	220 - 240 V ~ 50 Hz		
Rated input	650 W		
Max. delivery capacity / height	3800 l/h / 36 m	3800 l/h / 36 m	
Max. suction height	8 m		
Tank volume	20		
Max. activation / cut off pressure	1.5 bar / 3 bar		
Suction connection	33.3 mm (1") ET		
Pressure connection	33.3 mm (1") ET		
Power cord	1.4 m		
Product weight	10.5 kg		
Water Work without suction hose (7 m) (GC-WW 6538 Set)	Article number 4173190	4 006825 603484	
Water Work with suction hose (7 m) (GC-WW 6538 Set)	Article number 4173193	4 006825 611175	

### >> Overload protection

>> Pressure gauge

- Water filler screw
  Water forain screw
  High-quality mechanical seal
  Pressure gauge



### **WATER WORK**

### **GC-WW 6036**

Mains voltage	230 V ~ 50 Hz	
Rated input	600 W	
Max. delivery capacity / height	3600 l/h / 40 m	
Max. suction height	8 m	
Tank volume	20	
Max. activation / cut off pressure	1.5 bar / 3 bar	
Suction connection	33.3 mm (1") IT	
Pressure connection	33.3 mm (1") IT	
Power cord	1.5 m	
Product weight	14.3 kg	
Article number	4173118	4 006825 623574

- Overload protectionWater filler screwPressure gauge





### **PETROL WATER PUMP**

### **GE-PW 46**

Engine	Four-stroke		
Power rating	4.6 / 6.3 kW		
Max. delivery capacity / height	23000 l/h / 26 m		
Max. suction height	6.5 m		
Max. speed	3600 min <sup>-1</sup>		
Suction connection	59.6 mm (2") ET		
Pressure connection	59.6 mm (2") ET		
Fuel tank capacity	3.6		
Product weight	21.8 kg		
Incl. hose adapter	2x 50.8 mm (2")		
Incl. intake cage	• (2")		
Incl. reducer section	2x 47.8 mm (1.5") ET, 2x 33.3 mm (1") ET		
Article number	4171372 4 006825 643978		



- Non-return valveWater filler portWater drain screwOil filling screwLow oil stop

### **PETROL WATER PUMP**

### GC-PW 16

Engine	Four-stroke		
Power rating	1.8 / 2.4 kW		
Max. delivery capacity / height	14000 l/h / 28 m		
Max. suction height	7.0 m		
Max. speed	3600 min <sup>-1</sup>		
Suction connection	47.8 mm (1½") ET		
Pressure connection	47.8 mm (1½") ET		
Fuel tank capacity	1.3		
Product weight	12.0 kg		
Incl. hose adapter	2x 38.1 mm (1.5")		
Incl. intake cage	• (1.5")		
Article number	4190530 4 006825 644678		

### **Surface Pumps Accessories**

Suction Hose (7 m) with Brass Connectors	Article number 4173640	4 006825 549171
Suction Hose (4 m) with Brass Connectors	Article number 4173630	4 006825 549133
Suction Hose (7 m) with Plastic Connectors	Article number 4173645	4 006825 549102
Suction Hose (4 m) with Plastic Connectors	Article number 4173635	4 006825 549058
Coarse Filter 25 cm	Article number 4173851	4 006825 549195
Coarse Filter 12 cm	Article number 4173801	4 006825 549188
Electronic Flow Switch	Article number 4174230	4 006825 667738







# NO COMPROMISES. EXTENDED WARRANTY FOR PROFESSIONAL TOOLS.

Einhell delivers the quality expected of tools for commercial use. This is why we also offer an extended warranty for all PROFESSIONAL tools:

Regular guarantee period Extension upon registration

1 year 2 years

Total guarantee period

3 years (1+2)



### THIS IS HOW:

- 1. **Inform** yourself on einhell.de
- 2. **Register** in your customer account
- 3. **Apply** for the guarantee within 30 days of the date of purchase

www.einhell.de/en/services/warranties/





# **OUR PROMISE**

### TO DIY PROFESSIONALS AND EXPERTS

True Pros always give MORE.
Because every step demands perfection.
Where precision is a must.
And every second counts.
Professionals also expect more from their tools.

NOW EINHELL GIVES THEM MORE.

MORE PERFORMANCE.\*

MORE ENDURANCE.\*

MORE WARRANTY.\*\*

MORE LIFETIME.\*

MORE FUNCTIONALITY.\*

- \* Approximate values compared to carbon brush motor
- \*\* On Brushless Motors after online registering

# WITH BRUSHLESS MOTOR

**25%** MORE power\*

**50%** MORE endurance\*

**100%** MORE lifetime\*

**10 years** warranty\*\*

- \* Approximate values compared to carbon brush motor
- \*\* On Brushless Motors after online registering









### PROFESSIONAL ROBOT LAWN MOWER

- PXC SYSTEM BATTERY
- SMART CONNECTIVITY (GSM/NB-IOT)
- CAN BE CONTROLLED FROM ANYWHERE VIA APP NO WIFI OR BLUETOOTH REQUIRED
- >>> SMART MODE AUTOMATIC SCHEDULE CREATION, OPTIMISED FOR WEATHER, GARDEN SIZE AND CUSTOMER PREFERENCES
- NETWORKABLE WITH ALL EINHELL SMART DEVICES
- LCD DISPLAY









### **FREELEXO SMART 750**

PXC battery voltage	18 V
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	750 m²
Cutting width	18 cm
Cutting height adjustment	stepless / 20 - 60 mm / central
Suitable for slopes up to	35 %
Supplied with perimeter wire	175 m
Supplied with fastening hooks	245 pcs
Supplied with accessories	3 connecting clamps, 3 blades
Incl. 1 battery (18 V 3.0 Ah Li-ion)	Article number 4 006825 665543

### Robot Lawn Mowers without Perimeter Wire - Acces



W	owers without reini	icter wire - At	cessories
	Robot Lawn Mower Garage	Article number 3414024	4 006825 654417
	Perimeter Wire	Article number 3414021	4 006825 648782
	Spare Blades	Article number 3414020	4 006825 648775
	Repair Kit	Article number 3414026	4 006825 657968
	Connection Clamps	Article number 3414022	4 006825 648799
	Fastening Hooks	Article number 3414023	4 006825 648805
	Cleaning Set	Article number 3414025	4 006825 657951









### CAN BE CONTROLLED FROM EVERY-

Thanks to mobile internet connectability, a smartphone now lets you care for your lawn from wherever you might be.



# NETWORKABLE WITH EINHELL SMART TOOLS

Einhell Smart Tools work together automatically in Smart Mode.



### **SMART MODE**

In Smart Mode the robot lawn mower automatically draws up a work schedule that is optimally coordinated with the weather, the size of the garden and the customer's preferences.



### YOU DON'T NEED WIFI OR BLUETOOTH

Unlimited range thanks to communication via the mobile phone network.\*

\* Prerequisite: Available mobile network coverage; within the European Union.



# WEATHER FORECASTS TAKEN INTO ACCOUNT

In Smart Mode the robot lawn mower takes weather forecasts into account when adjusting to local weather conditions in order to achieve the best possible results.

Another SMART device from the Einhell range: **Automatic Home and Garden Pump GE-AW 1144 SMART** 









### **RASARRO 36/42**

PXC battery voltage	2x 18 V
Battery charging time 18 V / 5.2 Ah	100 min
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	725 m²
Cutting width	42 cm
Cutting height adjustment	6 levels / 25 - 75 mm / central
Grass box capacity	50 l
Wheel diameter front / rear	150 mm / 220 mm
Housing material	Plastic
Product weight	17.2 kg
Incl. 2 batteries (18 V 5.2 Ah Li-lon) and 1 Twincharger	Article number 3413272 4 006825 669138

	1.5 Ah						6.0 Ah	
2)	250 m <sup>2</sup>	300 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	550 m <sup>2</sup>	725 m <sup>2</sup>	875 m <sup>2</sup>	1100 m <sup>2</sup>

004835 451784 Spare blade 3405454

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)

Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)







### **RASARRO 36/40**

PXC battery voltage	2x 18 V
Battery charging time 18 V / 4.0 Ah	75 min
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	500 m²
Cutting width	40 cm
Cutting height adjustment	6 levels / 25 - 75 mm / central
Grass box capacity	50
Wheel diameter front / rear	150 mm / 220 mm
Housing material	Plastic
Product weight	17.4 kg
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 1 Twincharger	Article number 3413278 4 006825 669121

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	220 m <sup>2</sup>	280 m <sup>2</sup>	330 m <sup>2</sup>	425 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	850 m <sup>2</sup>	1000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)

Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)

Spare blade	3405454	4 006825 651386
		4 "000023 031300"







### **RASARRO 36/38**

TO 157 HTTC 50750			
PXC battery voltage	2x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	450 m²		
Cutting width	38 cm		
Cutting height adjustment	6 levels / 25 - 75 mm / central		
Grass box capacity	45 l		
Wheel diameter front / rear	150 mm / 220 mm		
Housing material	Plastic		
Product weight	15.5 kg		
Incl. 2 batteries (18 V 4.0 Ah Li-lon) and 1 Twincharger	Article number 3413180 4 006825 635867		

<b>IIII</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	250 m <sup>2</sup>	300 m <sup>2</sup>	330 m <sup>2</sup>	400 m <sup>2</sup>	450 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>	900 m <sup>2</sup>

004835 475847 Spare blade 3405486

For best performance select batteries with at least 2.5 Ah

1) Battery capacity (2x batteries required)

2) Max, lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)







### **GP-CM 36/41 Li Brushless**

PXC battery voltage	2x 18 V					
Cutting width	41 cm					
Cutting height adjustment	6 levels / 25 - 75 mm / central					
Grass box capacity	50 l					
Wheel diameter front / rear	150 mm / 220 mm					
Housing material	Plastic					
Product weight	15.2 kg					
Article only available without batteries / chargers	Article number 3413275 4 006825 652093					

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	220 m <sup>2</sup>	280 m <sup>2</sup>	330 m <sup>2</sup>	425 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	850 m <sup>2</sup>	1000 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

4 006825 651386 3405454 Spare blade

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge (The stated area coverage is based on the assumption of ideal conditions)







### GP-CM 36/52 S Li Brushless

PXC battery voltage	4x 18 V				
Battery charging time 18 V / 5.2 Ah	100 min				
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	1200 m²				
Cutting width	52 cm				
Cutting height adjustment	9 levels / 25 - 80 mm / central				
Grass box capacity	65 l				
Wheel diameter front / rear	204 mm / 280 mm				
Housing material	Steel				
Product weight	29.7 kg				
Incl. 4 batteries (18 V 5.2 Ah Li-lon) and 2 Twinchargers	Article number 3413320 4 006825 671667				

<b>III)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	225 m <sup>2</sup>	275 m <sup>2</sup>	315 m <sup>2</sup>	350 m <sup>2</sup>	450 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>	800 m <sup>2</sup>
3)	450 m <sup>2</sup>	550 m <sup>2</sup>	630 m <sup>2</sup>	700 m <sup>2</sup>	900 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>	1600 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries
 Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade

3405980









### **GP-CM 36/47 S Li Brushless**

PXC battery voltage	4x 18 V			
Battery charging time 18 V / 4.0 Ah	75 min			
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²			
Cutting width	47 cm			
Cutting height adjustment	9 levels / 25 - 80 mm / central			
Grass box capacity	65 I			
Wheel diameter front / rear	204 mm / 280 mm			
Housing material	Steel			
Product weight	29.6 kg			
Incl. 4 batteries (18 V 4.0 Ah Li-lon) and 2 Twinchargers	Article number 3413310	4 006825 671650		

	1.5 Ah							
<b>&gt;&gt;&gt;</b> 2)	125 m²	175 m²	215 m <sup>2</sup>	250 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>
3)	250 m <sup>2</sup>	350 m <sup>2</sup>	430 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)
 Max. lawn area that can be mown per battery charge with 2 batteries
 Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)

Spare blade 3405970









di civi 30/4/ 3 livi El bi d3lili			
PXC battery voltage	4x 18 V		
Battery charging time 18 V / 4.0 Ah	75 min		
For lawn areas of up to approx. (The stated area coverage is based on the assumption of ideal conditions)	700 m²		
Cutting width	th 47 cm		
Cutting height adjustment	6 levels / 30 - 65 mm / central		
Grass box capacity	x capacity 75 l		
Wheel diameter front / rear	Wheel diameter front / rear 200 mm / 280 mm		
Housing material	Steel		
Product weight	31.0 kg		
Cleaning tool	•		
Incl. 4 batteries (18 V 4.0 Ah Li-lon) and 2 Twinchargers	Article number 3413200	4 006825 639506	

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	125 m <sup>2</sup>	175 m <sup>2</sup>	215 m <sup>2</sup>	250 m <sup>2</sup>	350 m <sup>2</sup>	500 m <sup>2</sup>	600 m <sup>2</sup>	700 m <sup>2</sup>
3)	250 m <sup>2</sup>	350 m <sup>2</sup>	430 m <sup>2</sup>	500 m <sup>2</sup>	700 m <sup>2</sup>	1000 m <sup>2</sup>	1200 m <sup>2</sup>	1400 m <sup>2</sup>

Spare blade

3405455

4 006825 631050

For best performance select batteries with at least 2.5 Ah

Battery capacity (2x batteries required)

Max. lawn area that can be mown per battery charge with 2 batteries

Max. lawn area that can be mown per battery charge with 4 batteries (The stated area coverage is based on the assumption of ideal conditions)





# **PROFESSIONAL CORDLESS TILLER**



## **GP-CR 36/45 Li E Brushless**

PXC battery voltage	(C battery voltage 4x 18 V			
Working width	30 - 45 cm			
Working depth	230 mm			
Number of blades	4 - 6 pcs			
Cultivator blade diameter	245 mm			
Housing material	Metal			
Product weight	23.8 kg			
Article only available without batteries / chargers	Article number 3431220	4 006825 675108		

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	6-8 min	8-10 min	10-13 min	13-16 min	16-20 min	22-28 min	24-32 min	32-40 min
3)	12-16 min	16-20 min	20-26 min	26-32 min	32-40 min	44-56 min	48-64 min	64-80 min

For best performance select batteries with at least 4.0 Ah

Battery capacity (2x batteries required)
 Max. operating time per battery charge with 2 identical batteries (The stated area coverage is based on the assumption of ideal conditions)
 Max. operating time per battery charge with 4 identical batteries (The stated area coverage is based on the assumption of ideal conditions)





# PROFESSIONAL CORDLESS SNOW THROWER



For best performance select batteries with at least 4.0 Ah

Battery capacity (2x batteries required)
 Max. operating time per battery charge with 2 identical batteries (The stated area coverage is based on the assumption of ideal conditions)
 Max. operating time per battery charge with 4 identical batteries (The stated area coverage is based on the assumption of ideal conditions)





**PROFESSIONAL CORDLESS EARTH AUGER** 

- BRUSHLESS MOTOR
- DRILL BIT CHANGE WITHOUT TOOLS
- METAL FRAME
- CLOCKWISE / COUNTER-CLOCKWISE OPERATION
- SOFT GRIP



PXC battery voltage	18 V
Drilling diameter	150 mm
Drill bit length	800 mm
Speed	125 min <sup>-1</sup>
Product weight	6.0 kg
Article only available without batteries / chargers	Article number 3437000 4 006825 659023

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> <sup>2)</sup>	10 pcs	15 pcs	20 pcs	30 pcs	40 pcs	50 pcs	60 pcs	80 pcs

For best performance select a battery with at least 2.5 Ah

# **CORDLESS EARTH AUGERS ACCESSORIES**






### Earth Auger 200 mm GP-EA 18/150 Li Brushless Article number 4 006825 682960 EAN

### **Mortar Mixer**

Suitable for	GP-EA 18/150 Li Brushless
Article number	3437011
EAN	4 006825 659047



Suitable for	GP-EA 18/150 Li Brushless
Article number	3437010
EAN	4 006825 659030

Suitable for	GP-EA 18/150 Li Brushless
Article number	3437012
EAN	4 006825 659054



Battery capacity
 Max. number of drill holes (depth 40 cm, mixed soil) per battery charge



# **PROFESSIONAL CORDLESS SCYTHE**

- BRUSHLESS MOTOR
- 2-STEP ELECTRONIC SPEED CONTROL
- BATTERY CAPACITY INDICATOR
- SPINDLE LOCK
- SPLIT SHAFT
- DOUBLE THREAD SPOOL
- ADJUSTABLE HANDLE
- BATTERY PROTECTION BAR
- WALL BRACKET

# GP-BC 36/430 Li Brushles

di De 30/430 El Di d3ilie33	
PXC battery voltage	2x 18 V
Cutting width (blade)	25.5 cm
Cutting width (thread)	43 cm
Thread diameter	2.0 mm
Thread length	6 m
Product weight	6.8 kg
Double thread spool	•
3-tooth blade	•
Carrying strap	Backpack carrying strap
Article only available without batte- ries / chargers	Article number 3411340 4 006825 679571

<b>III)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	18-30	22-36	28-45	34-55	42-70	55-95	68-110	90-140
	min							
<b>3)</b>	12-18	14-22	18-28	22-34	28-45	36-60	45-68	56-86
	min							

For best performance select batteries with at least 2.5 Ah

Spare double thread spool, thread Ø 2.0 mm

3405103





Battery capacity (2x batteries required)
 Max. operating time per battery charge with blade in idle mode (dependent on the selected speed)
 Max. operating time per battery charge with thread spool in idle mode (dependent on the selected speed)





# **PROFESSIONAL CORDLESS SCYTHE**

- BRUSHLESS MOTOR
- 2-STEP ELECTRONIC SPEED CONTROL
- **SPINDLE LOCK**
- SPLIT SHAFT
- DOUBLE THREAD SPOOL
- ADJUSTABLE HANDLE
- BATTERY PROTECTION BAR
- **WALL BRACKET**

### GP-BC 36/430 Li P Brushless

PXC battery voltage	2x 18 V
Cutting width (blade)	25.5 cm
Cutting width (thread)	43 cm
Thread diameter	2.0 mm
Thread length	6 m
Product weight	6.2 kg
Double thread spool	•
3-tooth blade	•
Carrying strap	One-shoulder harness
Article only available without batte- ries / chargers	Article number

<b>(1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	18-30	22-36	28-45	34-55	42-70	55-95	68-110	90-140
	min							
3)	12-18	14-22	18-28	22-34	28-45	36-60	45-68	60-86
	min							

For best performance select batteries with at least 2.5 Ah

- Battery capacity (2x batteries required)
   Max. operating time per battery charge with blade in idle mode (dependent on the selected speed)
   Max. operating time per battery charge with thread spool in idle mode (dependent on the selected speed)

Spare double thread spool, thread Ø 2.0 mm	3405103	4 006825 679755

### **Cordless Scythes Accessories**

Special Grass Blade 230	Article number 3436660	4 006825 637953
Thicket Blade 255	Article number 3405082	4 006825 632774
Thicket Blade 200	Article number 3405083	4 006825 651454
Grass Blade 255	Article number 3404996	4 006825 607239
Grass Blade 230	Article number 3436661	4 006825 637960







# **PROFESSIONAL CORDLESS LAWN TRIMMER**



- LONG HANDLE WITH ERGONOMIC DOUBLE BEND
- INFINITELY ADJUSTABLE LONG HANDLE
- FLOWER GUARD
- AUTOMATIC JOG LINE FEED
- >>> SPLIT SHAFT
- ELECTRONIC SPEED CONTROL
- BATTERY PROTECTOR
- SOFT GRIP



Tested and recommended by Forum: Gesunder Rücken - besser leben e.V. and Bundesverband deut-scher Rückenschulen (BdR) e.V.

More information available from: AGR e.V., Stader Str. 6, 27432 Bre-mervörde, Tel. +49 4761/92 63 580, www.agr ev.de

### GP-CT 36/35 Li Brushless

or or so, so ar brasilioss		
PXC battery voltage	2x 18 V	
Cutting width	35 cm	
Thread diameter	2.0 mm	
Thread length	8 m	
Product weight	3.5 kg	
Thread spool	•	
Carrying strap	•	
Article only available without batte- ries / chargers	Article number 3411330	4 006825 670608

<b>III</b> ) 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	25 min	30 min	35 min	45 min	60 min	70 min	95 min	120 min
3)	15 min	20 min	25 min	35 min	45 min	55 min	65 min	90 min

- Battery capacity (2x batteries required) Max. operating time in ECO mode per battery charge
- <sup>3)</sup> Max. operating time in BOOST mode per battery charge

Spare line spool 3405096







# **PROFESSIONAL CORDLESS HEDGE TRIMMER**



- 2-STEP SPEED REGULATION
- TURNABLE REAR HANDLE
- **ERGONOMIC FRONT HANDLE THANKS TO MICRO** SWITCHES
- CUTTING COLLECTOR
- LASER-CUT AND DIAMOND-GROUND BLADES
- METAL GEAR BOX
- SOFT GRIP
- ALUMINIUM COVER OVER CUTTERS

### **GP-CH 18/61 Li Brushless**

PXC battery voltage	18 V
Bar length	670 mm
Cutting length	610 mm
Spacing between teeth	26 mm
Product weight	2.7 kg
Protective cover with wall mount	•
Article only available without battery / charger	Article number 4 006825 673623 410935

<b>III)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	29.5 min	39 min	49 min	59 min	78 min	102 min	118 min	156 min
3)	20 min	27 min	33 min	40 min	53 min	69 min	80 min	106 min

Battery capacity
 Max. operating time in ECO mode per battery charge
 Max. operating time in BOOST mode per battery charge





# **PROFESSIONAL CORDLESS HEDGE TRIMMER**



- 2-STEP SPEED REGULATION
- **>>>** ERGONOMIC FRONT HANDLE THANKS TO MICRO SWITCHES
- CUTTING COLLECTOR
- LASER-CUT AND DIAMOND-GROUND BLADES
- METAL GEAR BOX
- SOFT GRIP
- ALUMINIUM COVER OVER CUTTERS

# GP-CH 18/50 Li Brushless

PXC battery voltage	18 V
Bar length	560 mm
Cutting length	500 mm
Spacing between teeth	20 mm
Product weight	2.5 kg
Protective cover with wall mount	•
Article only available without battery / charger	Article number 3410950 4 006825 679748

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>&gt;&gt;&gt;</b> 2)	29.5 min	39 min	49 min	59 min	78 min	102 min	118 min	156 min
<b>3)</b>	20 min	27 min	33 min	40 min	53 min	69 min	80 min	106 min

Battery capacity
 Max. operating time in ECO mode per battery charge
 Max. operating time in BOOST mode per battery charge





# PROFESSIONAL CORDLESS MULTIFUNCTIONAL TOOL



- OREGON QUALITY BAR AND CHAIN
- AUTOMATIC CHAIN LUBRICATION
- LASER-CUT AND DIAMOND-GROUND BLADES
- ANTI-BLOCKING SYSTEM
- MOTOR HEAD TILTABLE BY MULTIPLE SETTINGS
- METAL GEAR BOX
- ADDITIONAL HOLDING AREA



## GP-HC 18/5020 Li T Brushless

PXC battery voltage	18 V				
Bar length (chainsaw)	200 mm				
Chain cutting speed	7 m/sec				
Blade length of hedge trimmer	500 mm				
Spacing between teeth (hedge trimmer)	25 mm				
Max. working height	4.0 m (pruner) / 3.5 m (hedge trimmer)				
Product weight	5.9 kg (incl. all attachments)				
Article only available without battery / charger	Article number 3410970 4 006825 681093				

1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>2</b> )	15 min	20 min	25 min	30 min	40 min	52 min	60 min	80 min
3)	27 pcs	39 pcs	54 pcs	73 pcs	99 pcs	127 pcs	148 pcs	198 pcs

Battery capacity

Max. operating time per battery charge — hedge trimmer

Max. cuts through 70 x 70 mm square timber per battery charge (pole-mounted pruner)

Spare chain 20cm 1,1 33T 3/8	4500193
Spare bar	4500117













# PROFESSIONAL CORDLESS TELESCOPIC HEDGE TRIMMER







# **PROFESSIONAL CORDLESS CHAINSAW**

- BRUSHLESS MOTOR
- OREGON QUALITY BAR AND CHAIN
- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- XICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- SOFT GRIP
- LARGE OIL FILLER OPENING



### GP-LC 36/40 Li Brushle

di Ec 30/40 El Bi dallicas	
PXC battery voltage	2x 18 V
Petrol equivalence class	up to 3.0 hp
Bar length	400 mm
Cutting length	380 mm
Cutting speed	19 m/s
Oil tank capacity	230 ml
Product weight	4.7 kg
Protective cover	•
Article only available without batteries / chargers	Article number 4 006825 678406

<b>(1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	81 pcs	108 pcs	134 pcs	159 pcs	212 pcs	276 pcs	319 pcs	425 pcs

For best performance select batteries with at least 5.2 Ah

Battery capacity (2x batteries required)
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 40cm 1.3 56T 3/8	4500367	4 006825 681857
Spare bar 40cm 1,3	4500156	4 006825 548778





# **PROFESSIONAL CORDLESS CHAINSAW**

- BRUSHLESS MOTOR
- OREGON QUALITY BAR AND CHAIN
- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- XICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- SOFT GRIP
- LARGE OIL FILLER OPENING



### GP-LC 36/35 Li Brushless

PXC battery voltage	2x 18 V	
Petrol equivalence class	up to 2.5 hp	
Bar length	350 mm	
Cutting length	330 mm	
Cutting speed	15 m/s	
Oil tank capacity	115 ml	
Product weight	4.0 kg	
Protective cover	•	
Article only available without batte- ries / chargers	Article number 4501780	4 006825 631920

<b>1)</b>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	120 pcs	160 pcs	200 pcs	240 pcs	320 pcs	420 pcs	480 pcs	640 pcs

For best performance select batteries with at least 3.0 Ah

Battery capacity (2x batteries required)
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 35cm 1,1 52T 3/8	4500196	4 006825 632231
Spare bar 35cm 1,1	4500197	4 006825 632248





# PROFESSIONAL TOP-HANDLED CORDLESS CHAINSAW

- BRUSHLESS MOTOR
- OREGON QUALITY BAR AND CHAIN
- TOOLLESS CHAIN TENSIONING AND CHANGING
- AUTOMATIC CHAIN LUBRICATION
- STURDY STOP CLAWS MADE OF METAL
- >>> KICKBACK PROTECTION WITH MECHANICAL INSTANT CHAIN BRAKE
- CHAIN CATCH BOLT
- **ERGONOMIC HANDLE WITH SOFT GRIP**
- LARGE OIL FILLER OPENING
- TIP GUARD



### FORTEXXA 18/20 TH

PXC battery voltage	18 V
Petrol equivalence class	up to 1.5 hp
Bar length	200 mm
Cutting length	140 mm
Cutting speed	7 m/s
Oil tank capacity	75 ml
Product weight	2.5 kg
Protective cover	•
Article only available without battery / charger	Article number 4 006825 663099

							6.0 Ah	
<b>333</b> 2)	60 pcs	80 pcs	100 pcs	120 pcs	160 pcs	210 pcs	240 pcs	320 pcs

For best performance select a battery with at least 2.5 Ah

Battery capacity
 Max. cuts through 70 x 70 mm square timber per battery charge

Spare chain 20cm 1,1 33T 3/8	4500193	4 006825 664577
Spare bar 20cm 1,2	4500194	4 006825 664560

WARNING:This chainsaw may only be used by trained tree careworkers. Misactions in compliance with safety instructions may cause serious injuries.



# **WOODWORKING ACCESSORIES**

rolest salety neilliet					
Head circumference	52-66 cm				
Product weight	0.7 kg				
Article number	4500480				
EAN	4 006825 544565				





# **PROFESSIONAL CORDLESS PRUNING CHAINSAW**

- BRUSHLESS MOTOR
- AUTOMATIC CHAIN LUBRICATION
- METAL GEAR BOX
- TOOLLESS GUIDE BAR AND CHAIN CHANGE
- HIGH-QUALITY GUIDE BAR AND CHAIN SET
- HAND GUARD AND FOLDING CHAIN COVER
- STORAGE SURFACE FOR USE WITH BOTH HANDS



### **GP-PS 18/20 Li Brushless**

PXC battery voltage	18 V			
Bar length	192 mm			
Cutting length	150 mm			
Cutting speed	8 m/s			
Oil tank capacity	70 ml			
Product weight	1.2 kg			
Protective cover	•			
Article only available without battery / charger	Article number 4600080	4 006825 683295		

<b>(111)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
2)	100 pcs	134 pcs	168 pcs	201 pcs	268 pcs	348 pcs	402 pcs	536 pcs

n Battery capacity Max. cuts per battery charge through soft roundwood (ø 50 mm)

Spare chain 20cm 1,1 32T 7,62	4501746	4 006825 685060
Spare bar 20cm 1,1 SP6	4501755	4 006825 685053

# **WOODWORKING ACCESSORIES**



### **Chainsaw Trestle**

	Profile thickness	1.9 mm				
	Maximum load capacity	150 kg				
į	For tree trunks up to a diameter of	approx. 30 cm				
	Product weight	7.1 kg				
	Article number	4500067				
	EAN	4 006825 548693				



### **Chainsaw Trestle 2.5**

Profile thickness	2.5 mm
Maximum load capacity	200 kg
For tree trunks up to a diameter of	approx. 30 cm
Product weight	8.9 kg
Article number	4500690
EAN	4 006825 678826





# PROFESSIONAL CORDLESS LEAF BLOWER

BRUSHLESS MOTOR

AXIAL FAN TECHNOLOGY

TURBO FUNCTION

ELECTRONIC SPEED CONTROL WITH LED INDICATION

ANGLE-ADJUSTABLE BLOWER HEAD

BALANCE HANDLE WITH SOFT GRIP

DUAL OPERATING MODE WITH ADDITIONAL NOZZLE ATTACHMENT

SOFT GRIP



Autumn 2025



PXC battery voltage	2x 18 V			
Max. blow velocity	270 km/h			
Max. blowing air flow	1100 m³/h			
Idle speed	10000 - 22300 min <sup>-1</sup>			
Product weight	2.2 kg			
Article only available without batteries / chargers	Article number			

<b>IIII</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	4-21 min	6-26 min	9-33 min	11-41 min	12-52 min	18-69 min	23-81 min	25-104 min
3)	3 min	5 min	6 min	8 min	10 min	13 min	16 min	19 min

For best performance select a battery with at least 3.0 Ah

Battery capacity (2x batteries required)
 Max. operating time per battery charge in idle mode – dependent on the selected speed
 Max. operating time per battery charge in idle mode in TURBO mode





# PROFESSIONAL CORDLESS LEAF BLOWER



For best performance select a battery with at least 2.5 Ah

Battery capacity (2x batteries required)

Max. operating time per battery charge in idle mode – dependent on the selected speed
Max. operating time per battery charge in idle mode in TURBO mode





# **PROFESSIONAL CORDLESS LEAF BLOWER**



- AXIAL FAN TECHNOLOGY
- TURBO FUNCTION
- **ELECTRONIC SPEED CONTROL WITH LED INDICATION**
- BALANCE HANDLE WITH SOFT GRIP
- GUTTER CLEANING SET (only GP-LB 18/200 Li GK Brushless)



PXC battery voltage	18 V				
Max. blow velocity	200 km/h				
Max. blowing air flow	670 m³/h				
Idle speed	13000 - 18000 min <sup>-1</sup>				
Product weight	2.2 kg				
Article incl. gutter cleaning set, without battery / charger (GP-LB 18/200 Li GK Brushless)	Article number 34.335.50	4 006825 658965			
Article without gutter cleaning set, without battery / charger (GP-LB 18/200 Li E Brushless)	Article number 34.335.55	4 006825 660616			

<b>III)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	1-11 min	5-13 min	8-15 min	10-21 min	15-27 min	18-33 min	20-37 min	30-54 min
3)	-	-	3 min	5 min	6 min	10 min	12 min	15 min

- Battery capacity
   Max. operating time per battery charge in idle mode dependent on the selected speed
   Max. operating time per battery charge in idle mode in TURBO mode

# CORDLESS LEAF BLOWERS ACCESSORIES



**Gutter Cleaning Set, 5 pieces** 

Suitable for	GP-LB 18/200 Li GK Brush- less and GP-LB 18/200 Li E Brushless
Article number	3433559
EAN	4 006825 660906





# PROFESSIONAL CORDLESS LEAF VACUUM



- BRUSHLESS MOTOR
- TOOLLESS CHANGEOVER FROM BLOWER AND SUCTION FUNCTION
- TURBO FUNCTION
- ELECTRONIC SPEED CONTROL WITH LED INDICATION
- ADDITIONAL HANDLE
- CLEANING OPENING WITH SAFETEY SWITCH
- HEIGHT-ADJUSTABLE GUIDING WHEELS
- QUALITY DEBRIS BAG WITH WINDOW FOR CHECKING THE FILLING LEVEL
- SHREDDING WHEEL WITH CLEANING OPENING
- SOFT GRIP
- INCL. CARRYING STRAP

# **VENTURRO 36/240**

2x 18 V				
240 km/h				
740 m³/h				
8000 - 15000 min <sup>-1</sup>				
10:1				
45 I				
3.6 kg				
Article number 3433640 4 006825 665451				

E Einhell

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
>>> <sup>2)</sup>	7-17 min	9-23 min	10-27 min	14-35 min	17-46 min	21-56 min	27-70 min	34-92 min
<b>3)</b>	4 min	5 min	6 min	8 min	10 min	13 min	16 min	20 min
<b>&gt;&gt;&gt;</b> 4)	7-19 min	9-25 min	10-28 min	14-37 min	18-49 min	21-58 min	28-74 min	36-98 min
<b>3333</b> 5)	4 min	5 min	6 min	8 min	10 min	13 min	16 min	20 min

For best performance select a battery with at least 2.5 Ah

1) Battery capacity (2x batteries required)

Max. operating time per battery charge in idle mode (vacuuming mode) – dependent on the selected

speed

Max. operating time per battery charge in idle mode (TURBO vacuuming mode)

Max. operating time per battery charge in idle mode (blowing mode) – dependent on the selected

speed '
Max. operating time per battery charge in idle mode (TURBO blowing mode)





# **PROFESSIONAL CORDLESS PRUNING SHEARS**



# GP-LS 18/28 Li T Brushless

PXC battery voltage	18 V			
Min. branch diameter	14 mm			
Max. branch diameter	28 mm			
Max. working height	3.8 m			
Product weight	1.9 kg			
Article only available without battery / charger	Article number 3408330	4 006825 679168		

(IIII) <sup>1)</sup>	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	1080 pcs	1450 pcs	1830 pcs	2175 pcs	2900 pcs	3860 pcs	4350 pcs	5800 pcs

Battery capacity
 Max. cuts per battery charge through round dry beech wood (ø 15 mm)





# **PROFESSIONAL CORDLESS PRUNING SHEARS**



# **GP-LS 18/28 Li Brushless**

PXC battery voltage	18 V	
Min. branch diameter	14 mm	
Max. branch diameter	28 mm	
Product weight	0.8 kg	
Article only available without battery / charger	Article number 3408320	4 006825 679175

<b>IIII)</b> 1)	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	4.0 Ah	5.2 Ah	6.0 Ah	8.0 Ah
<b>333</b> 2)	1080 pcs	1450 pcs	1830 pcs	2175 pcs	2900 pcs	3860 pcs	4350 pcs	5800 pcs

Battery capacity
 Max. cuts per battery charge through round dry beech wood (ø 15 mm)







# **ACCESSORIES - BATTERIES**

### 4.0 Ah SEALED Power X-Change Plus Battery



HO AN SEALED I OWE	A change i las baccery
Items supplied	1 battery
PXC battery voltage	18 V / 4.0 Ah
Battery power	max. 900 W
Product weight	0.58 kg
Article number	4511627
EAN	4 006825 673227

### 3.0 Ah SEALED Power X-Change Plus Battery



3.0 All SEALED I OWEL A-CHange I las battery					
Items supplied	1 battery				
PXC battery voltage	18 V / 3.0 Ah				
Battery power	max. 900 W				
Product weight	0.57 kg				
Article number	4511618				
EAN	4 006825 672794				

# SEALED



# SEALED TECHNOLOGY. NO CHANCE FOR DUST AND WATER.

Officially tested to IP57 protection class.\*

# **WHAT DOES IP57 MEAN?**

DUST 5

Protected from all types of foreign bodies and dust – be it wood, brick or metal.





7 WATER

Protected from high pressure water spray and temporary submersion – to a maximum depth of 1 m for up to 30 minutes.





In addition to the sealed housing there is a sensor controlled safety cut out to prevent short circuiting under water.

After the contacts have been dried, the battery is ready for use again.

<sup>\*</sup> Protection according to IP57 applies to the battery itself. It does not apply to tools operated with the battery.







# **PLUS TECHNOLOGY**

By switching to the new "21700" cell format (21 mm diameter, 70.0 mm length) our latest Power X-Change batteries have acquired the best combination of power/running time and weight.

Why? Using this cell technology it is possible to achieve the same power and running time with five cells instead of the previous ten.

Benefits? The new batteries are 12 % lighter and 13 % more compact than their predecessors – at 100 % power and running time.

Results: Light-weight all-rounders energy-intensive applications such as in cordless chainsaws.





# **MULTI-AH TECHNOLOGY**

Thanks to MULTI-Ah technology, switching over from a 5.0 Ah battery to a 8.0 Ah battery is really easy and can be done with just the push of a button.

The 5.0 Ah battery has a 3x longer total service life and is suitable for lighter applications (e.g. cordless lamps or cordless screwdrivers). The 8.0 Ah battery offers the maximum running time for more capacity-intensive applications (e.g. cordless lawn mowers or cordless wet and dry vacuum cleaners).





# ONE BATTERY FOR ALL DEVICES - TWIN-PACK TECHNOLOGY

Every Power X-Change battery from Einhell has a voltage of 18 V. If more power is required for more powerful tools, **two 18 V batteries are simply combined in one 36 V device** thanks to Twin-Pack technology. Doubling the voltage automatically doubles the power.

Double Twin-Pack technology allows you to work even longer without recharging. This uses four batteries. If the first two batteries are empty, the system automatically switches to the two additional batteries.





# **ACCESSORIES - BATTERIES**

## One battery for all devices

Our rechargeable batteries are not only available individually (solo item), but also in a Twin Pack. To get started in the Einhell world, we recommend choosing a Starter Kit (battery + charger)

	Less weight and size			tteries	More power a	More power and runtime		
						NEW		
	1.5 Ah	2.0 Ah	2.5 Ah	3.0 Ah	3.0 Ah PLUS	3.0 Ah SEALED		
Solo (1 battery)	Only available in Starter Kits	4511395	Only available in Starter Kits	Only available in Kits	4511501	4511618		
EAN	-	4 006825 610369	-	-	4 006825 644197	4 006825 672794		
Power	max. 450 W	max. 450 W	max. 720 W	max. 900 W	max. 900 W	max. 900 W		
Weight	400 g	400 g	460 g	650 g	585 g	595 g		
Features								
PLUS – Extra Power					<b>✓</b>	✓		
SEALED						<b>✓</b>		
Multi-Ah								

	Less weight	and size	PXC Ba	tteries	More power and runtime		
			NEW				
	4.0 Ah	4.0 Ah PLUS	4.0 Ah SEALED	5.2 Ah	4-6 Multi-Ah	5-8 Multi-Ah	
Solo (1 battery)	4511396	4511553	4511627	4511437	4511502	4511600	
EAN	4 006825 610376	4 006825 660869	4 006825 673227	4 006825 616606	4 006825 644210	4 006825 665055	
Power	max. 900 W	max. 900 W	max. 900 W	max. 1260 W	max. 1350 W	max. 1350 W	
Weight	670 g	595 g	605 g	890 g	1020 g	1050 g	
Features							
PLUS – Extra Power		<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b>	✓	
SEALED			<b>✓</b>				
Multi-Ah					<b>✓</b>	✓	

	3.0 Ah PLUS	4.0 Ah	4.0 Ah PLUS	5.2 Ah
Twin-Pack (2 batteries)	4511631	4511489	4511629	4511526
EAN	4 006825 673692	4 006825 638578	4 006825 673685	4 006825 656695





# **ACCESSORIES - STARTER KITS**

Getting started is easy - with the Einhell Power X-Change Starter Kit

Technical data and features at a glance:



# **ACCESSORIES - CHARGERS**

Article number

**Charging current** 

Number of ports for PXC batteries

One charger for all batteries - 100% compatibility

	3 A Charger	3 A Carcharger	4 A Fastcharger	6 A Boostcharger	8 A Boostcharger
Article number	Only available in Starter Kits	4512113	4512103	Only available in Starter Kits	4512155
EAN	-	4 006825 655377	4 006825 650228	-	4 006825 670554
Charging current	3 A	3 A	4 A	6 A	8 A
Number of ports for PXC batteries	1	1	1	1	1

4 A Quattrocharger

4512102

4 (per port)

(parallel charging of 2x2 batteries)

4

NEW



4 A (per port)

2

3 A (per port)

2







- >> Endless extendable
- Tongue and groove connection
   Snap-in function for secure fastening

# **PXC ACCESSORIES**

# **Battery Mounting Gadget**

Items supplied	2 battery mounting gadgets, 4 screws, 4 dowels				
Suitable for (batteries)	all 18 V Power X-Change batteries				
Special feature	The batteries latch in place and are secure in every position				
Article number	4514155	4 006825 658774			

# **PXC ACCESSORIES**

**Battery Protector** Items supplied
Suitable for (batteries) Can be used for (devices)

Special feature

1 battery cover all 18 V Power X-Change batteries HYPRESSO 18/24, TE-DA 18/760 Li, GE-WS 18/10 Li Protects the battery against dust and moisture 4 006825 670844

Article number 4140151



>> Protects the battery against dust and moisture

## **BATTERY CHARGING TIME TABLE**

	1,5 Ah	2,0 Ah	2,5 Ah	3,0 Ah	4,0 Ah	5,2 Ah	6,0 Ah	8,0 Ah	
Power X-Charger 3 A									Shorter charging
Power X-Twincharger 3 A (parallel charging of 2 batteries)	30 min	40 min	50 min	60 min	75 min	100 min	120 min	160 min	time
Power X-Car Charger 3 A									2504
Power X-Twincharger 4 A									-25%
Power X-Fastcharger 4 A	24 min	30 min	37 min	45 min	60 min	80 min	90 min	120 min	
2x2 Power X-Quattrocharger 4 A (parallel charging of 2 batteries)									
Power X-Boostcharger 6 A *	24 min	30 min	27 min	32 min	40 min	50 min	60 min	80 min	-50%
Power X-Boostcharger 8 A **	24 min	30 min	27 min	32 min	40 min	40 min	45 min	60 min	-60%

<sup>\*</sup> Only 2.5 Ah - 8.0 Ah batteries can be charged with 6 A. Batteries of lower capacity are charged with a lower current. \*\*Only 5.2 Ah - 8.0 Ah batteries can be charged with 8 A. Batteries of lower capacity are charged with a lower current.



